

# Risk Assessment Report

## Organizational Maintenance Shop #28


**Contract No.: W90FYQ-10-D-0010**  
**Task Order No. CK02**

**Prepared for:**

United States Army Corps of Engineers, Mobile District  
United States Army National Guard



Alabama Army National Guard  
Mobile AL



109 St. Joseph Street  
Mobile AL 36602

**Prepared by:**

AECOM TECHNICAL SERVICES, INC.  
GREENVILLE, SC

**March 2019**

*This report includes data that shall not be disclosed outside the Government and shall not be duplicated, used or disclosed—in whole or in part—for any purpose other than in support of this project*

This page intentionally left blank.

## TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
<b>TABLE OF CONTENTS</b> .....	<b>II</b>
<b>LIST OF TABLES</b> .....	<b>IV</b>
<b>LIST OF FIGURES</b> .....	<b>V</b>
<b>LIST OF APPENDICES</b> .....	<b>VI</b>
<b>LIST OF ABBREVIATIONS AND ACRONYMS</b> .....	<b>VII</b>
<b>1.0 INTRODUCTION</b> .....	<b>1-1</b>
1.1 PURPOSE AND SCOPE OF WORK .....	1-1
1.2 SITE LOCATION AND DESCRIPTION.....	1-1
1.3 SITE BACKGROUND AND HISTORY.....	1-2
<b>2.0 DATA COLLECTION AND EVALUATION</b> .....	<b>2-1</b>
2.1 DATA COLLECTION.....	2-1
2.2 DATA EVALUATION METHODOLOGY.....	2-2
<b>3.0 HUMAN HEALTH RISK ASSESSMENT</b> .....	<b>3-1</b>
3.1 IDENTIFICATION OF CHEMICALS OF POTENTIAL CONCERN .....	3-1
3.2 EXPOSURE ASSESSMENT .....	3-3
3.2.1 Characterization of Exposure Setting.....	3-3
3.2.2 Identification of Human Health Exposure Pathways .....	3-3
3.3 EXPOSURE POINT CONCENTRATIONS.....	3-6
3.4 EXPOSURE FACTORS.....	3-7
3.5 TOXICITY FACTORS .....	3-8
3.6 CALCULATION OF RISKS AND HAZARDS .....	3-9
3.6.1 Soil and Groundwater Risks and Hazards Based on Direct Contact .....	3-10
3.6.2 Groundwater Risks and Hazards Based on Vapor Intrusion.....	3-11
3.6.3 Summary of Risks and Hazards .....	3-12
3.7 DEVELOPMENT OF SITE-SPECIFIC SCREENING LEVELS .....	3-12
3.8 SUMMARY .....	3-14
<b>4.0 SCREENING LEVEL ECOLOGICAL RISK ASSESSMENT</b> .....	<b>4-1</b>
4.1 THE ECOLOGICAL RISK ASSESSMENT (ERA) PROCESS .....	4-1
4.2 SCREENING-LEVEL ECOLOGICAL RISK ASSESSMENT (SLERA).....	4-2
4.2.1 Step 1: Initial Problem Formulation and Effects Evaluation .....	4-2
4.2.1.1 Data Evaluation and Aggregation .....	4-2
4.2.1.2 Identification of ESVs.....	4-2
4.2.2 Step 2: Exposure Estimation and Risk Calculation .....	4-3
4.2.2.1 Ecological Setting.....	4-3
4.2.2.2 Ecological CSM.....	4-4
4.2.2.3 Screening-Level Risk Calculation .....	4-4
4.2.3 Ecological Risk Characterization .....	4-5
4.2.4 Scientific/Management Decision Point 1 .....	4-5

**5.0 REFERENCES..... 5-1**

## LIST OF TABLES

TABLE	TITLE
1a	Summary of Sample Locations and Analyses
1b	Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel
2	Identification of COPCs in Surface Soil
3	Identification of COPCs in Subsurface Soil
4	Identification of COPCs in Groundwater
5	Identification of Vapor Intrusion COPCs in Groundwater
6	Exposure Point Concentration Summary – Surface Soil
7	Exposure Point Concentration Summary – Subsurface Soil
8	Exposure Point Concentration Summary – Groundwater
9	Exposure Point Concentration Summary – Groundwater Vapors Migrating into Indoor Air
10	Exposure Factors – Soil (Current/Future – Oral and Dermal)
11	Exposure Factors – Soil (Current/Future – Inhalation)
12	Exposure Factors – Soil (Future – Oral and Dermal)
13	Exposure Factors – Soil (Future – Inhalation)
14	Exposure Factors – Groundwater (Future – Oral and Dermal)
15	Exposure Factors – Groundwater (Current/Future – Inhalation from Vapor Intrusion)
16	Exposure Factors – Groundwater (Future – Inhalation from a Trench, Showering, and Vapor Intrusion)
17	Toxicity Factors
18	Summary of Risks and Hazards
19	Site Concentrations and Site-Specific Screening Levels for COCs
20	Identification of Preliminary COPECs in Surface Soil
21	Refinement Screening for Birds and Mammals (Surface Soil)



## **LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Facility Location Map
2	Facility Site Location Map
3	Sample Locations
4	Exposure Pathway Diagram
5	Groundwater Locations Identified within the Core of the VOC Plume at Each Parcel

## LIST OF APPENDICES

APPENDIX	TITLE
A	VISL Calculator Output
B	ProUCL Output
C	Development of Dermal Absorption Exposure in Groundwater and Trench Model
D	Chemicals of Specific Consideration
E	Risk and Hazard Tables
F	Johnson and Ettinger Modeling Output
F.1	Johnson and Ettinger Modeling Output for Risk
F.2	Johnson and Ettinger Modeling Output for SSSLs Based on Risk of $10^{-6}$
F.3	Johnson and Ettinger Modeling Output for SSSLs Based on Risk of $10^{-5}$
F.4	Johnson and Ettinger Modeling Output for SSSLs Based on Risk of $10^{-4}$
G	Development of Site-Specific Screening Levels
G.1	Development of Site-Specific Screening Levels Based on Risk of $10^{-6}$ and HQ of 1
G.2	Development of Site-Specific Screening Levels Based on Risk of $10^{-5}$ and HQ of 1
G.3	Development of Site-Specific Screening Levels Based on Risk of $10^{-4}$ and HQ of 1

## LIST OF ABBREVIATIONS AND ACRONYMS

ADAF	age-dependent adjustment factor
ADEM	Alabama Department of Environmental Management
AECOM	AECOM Technical Services, Inc.
AFB	Air Force Base
ALARNG	Alabama Army National Guard
ARAR	applicable or relevant and appropriate requirements
ARNG	Army National Guard
BGS	below ground surface
BRA	baseline risk assessment
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
cis-1,2-DCE	cis-1,2-dichloroethene
COC	chemicals of concern
COPC	chemical of potential concern
COPEC	chemicals of potential ecological concern
CSM	conceptual site model
DoD	Department of Defense
EPC	exposure point concentration
EPD	exposure pathway diagram
ERA	ecological risk assessment
ERAGS	Ecological Risk Assessment Guidance for Superfund
ESV	ecological screening value
FMS	Field Maintenance Shop
FS	feasibility study
GCAL	Gulf Coast Analytical Laboratories, Inc.
GI	gastrointestinal
HHRA	human health risk assessment
HI	hazard index
HQ	hazard quotient
IPaC	Information for Planning and Consultation
IUR	inhalation unit risk
LOD	limit of detection
MAA	Mobile Airport Authority
MCL	maximum contaminant level
µg/L	micrograms per liter
µg/m <sup>3</sup>	microgram per cubic meter
mg/kg	milligrams per kilogram
msl	mean sea level
OMS	Organizational Maintenance Shop
PCE	tetrachloroethene
RA	risk assessment
RAGS	Risk Assessment Guidance for Superfund
RfC	reference concentration
RfD	reference dose
RI	remedial investigation
RME	reasonable maximum exposure

RSL	regional screening level
SAIC	Scientific Applications International Corporation
SF	slope factor
SLERA	screening-level ecological risk assessment
SMDP	scientific/management decision point
SSSL	site-specific screening level
TCE	trichloroethene
TCL	target compound list
UCL	upper confidence limit
UPF-QAPP	Uniform Federal Policy-Quality Assurance Project Plan
USACE	United States Army Corps of Engineers
USEPA	United States Environmental Protection Agency
USFWS	United States Fish and Wildlife Service
UST	underground storage tank
VDEQ	Virginia Department of Environmental Quality
VISL	Vapor Intrusion Screening Level
VOC	volatile organic compound

## 1.0 INTRODUCTION

This report presents the results of the risk assessment (RA) conducted at the Alabama Army National Guard (ALARNG) Organizational Maintenance Shop #28 (OMS #28) located at the former Brookley Air Force Base (AFB). AECOM Technical Services, Inc. (AECOM) was contracted by the U.S. Army Corps of Engineers (USACE), Mobile District under the Contract Number W90FYQ-10-D-0010, Task Order No. CK02, to conduct the RA.

### 1.1 PURPOSE AND SCOPE OF WORK

The scope and objectives of the RA were initially presented in a Uniform Federal Policy Quality Assurance Project Plan (UPF-QAPP) Work Plan prepared by AECOM and submitted to the Alabama Department of Environmental Management (ADEM) in January 2016. An addendum to the UFP-QAPP Work Plan, Appendix D, was submitted to ADEM in January 2018.

The human health risk assessment (HHRA) was conducted to evaluate potential risk to human receptors at the site using a five-step, risk-based process:

- 1) Selection of chemicals of potential concern (COPCs)
- 2) Identification of exposure point concentrations (EPCs)
- 3) Development of site-specific screening levels (SSSLs)
- 4) Calculation of risks and hazards
- 5) Comparison of exposure point concentrations to SSSLs.

The ecological risk assessment (ERA) consisted of a screening-level ecological risk assessment (SLERA).

The RA is presented in three additional sections. Section 2 describes Data Collection and Evaluation, including the data used for the RA, how they were grouped by location and medium, and how they were evaluated for use in the RA. Section 3 is the HHRA, and Section 4 is the ERA.

The purpose for conducting this risk assessment report is to update the risk estimates (from the 2013 Remedial Investigation/Baseline Risk Assessment (RI/BRA) – Scientific Applications International Corporation [SAIC], 2013) using current data. This information will in turn provide the basis for re-evaluation of the alternatives recommended in the Feasibility Study (FS) (Leidos, 2014).

### 1.2 SITE LOCATION AND DESCRIPTION

OMS #28 is located in Mobile County, near downtown Mobile at 1622 South Broad Street, between U.S. Interstate Highway 10 (I-10) and Mobile Bay (**Figure 1**). The property is relatively flat with an elevation of approximately 20 to 30 feet above mean sea level (msl). The OMS #28 site is bordered by undeveloped land and I-10 to the west; residential property to the north, the OMS #28 shop and Fort Floyd A. McCorkle Army National Guard (ARNG) facility building to the east; and commercial and industrial properties to the south (**Figure 2**). The vegetative cover consists of mainly oak trees, scrub, brush, and grasses. The nearest residential structure is approximately 150 feet northeast of the OMS #28 building.

OMS #28 is located in the northwest corner of the former Brookley AFB. The former AFB is now the Brookley Aeroplex. The initial 1,000 acres were acquired by the Department of Defense (DoD) in 1938

with additional land acquisitions through 1955 for a total of 3,156 acres. Brookley AFB was operated by the Air Force as a general support and supply base until June 1969 when it was officially closed. The DoD returned Brookley AFB to the city of Mobile and the city created the Mobile Airport Authority (MAA) in 1972. Facilities at the Brookley Aeroplex include runways and maintenance areas for aircraft, underground and aboveground fuel storage facilities, associated buildings, roads, housing and landfills. No human consumption or agricultural wells are located within the boundaries of the Brookley Aeroplex. The Brookley Aeroplex is used currently as an industrial complex and airport by the MAA (SAIC, May 2013).

Currently, the Alabama Armory Commission owns the 5.9 acres of property on which OMS #28 is located, and ALARNG operates the Field Maintenance Shop (FMS) (formerly known as the OMS). The Alabama Armory Commission has owned this property since 1953 when the City of Mobile conveyed 25.66 acres to the Commission. In 2002, 6.43 acres west of the OMS #28 property reverted back to the City and the City subsequently conveyed the property to the MAA (SAIC, May 2013).

It should be noted that the ALARNG renamed OMS #28 to FMS #28 several years ago; however, the Site is referred to as OMS #28 in all previous ALARNG, ADEM, and USACE investigation reports; therefore, to avoid confusion, the Site is referred to herein as OMS #28. According to ALARNG personnel, Site operations have not significantly changed since conversion to FMS #28 (Louis Berger, 2015).

### **1.3 SITE BACKGROUND AND HISTORY**

The Site has undergone numerous development, redevelopment, and organizational periods since initial development. The original/former OMS #28 building was constructed in the early 1950s and the original OMS #29 building was constructed in the 1960's. Operations and nomenclature of these facilities consolidated when the current OMS #28 building was constructed in 1978. The original/former OMS #28 building was used for storage from 1978 until demolition in 2001. Operations within the former OMS #29 were also transferred to the new OMS #28 building and the old OMS #29 building was used for storage and eventually demolished. The current OMS #28 building was expanded in 1994 to accommodate a greater volume of work. Currently, the OMS #28 building is used for vehicle staging, vehicle maintenance, and direct support for military police, medical, signal, communications, and field artillery units (Louis Berger, 2015).

A wash pad was formerly operational in the far northwestern corner of the parking lot until 1978. The wash pad was constructed as a concrete slab with no drainage system in place. Military vehicles were routinely washed in this area and wash water was allowed to flow freely onto the ground.

Four underground storage tanks (USTs) were removed from three separate locations (i.e., Pit 1, Pit 2, and Pit 3) at the Site in October 1992. Upon removal of a single 2,000-gallon gas/diesel UST at Pit 2, petroleum-related soil and groundwater contamination was identified; however, a preliminary sampling effort was unable to determine the nature and extent of the contaminants. Additional investigation in December 1994 reportedly completely delineated the extent of petroleum-related soil and groundwater contamination associated with Pit 2. Quarterly groundwater monitoring for petroleum-related contaminants began in 1995 and continued through 2004. Further Site characterization was deemed necessary and was performed in 2004 and 2005 when analysis of quarterly groundwater sampling results indicated that petroleum contamination had migrated beyond the original monitoring well network installed during the initial 1994 groundwater investigation. This supplemental work consisted of the installation of

additional monitoring wells at the Site, in attempt to delineate petroleum contamination associated with Pit 2 (Louis Berger, 2015). The investigation area and relevant historical features are depicted on **Figure 2**.

In March 2005, trichloroethene (TCE) was detected at the Site for the first time in monitoring well MW-8. The presence of TCE in MW-8 was determined to be unrelated to the petroleum tanks that were removed from the Site in 1992; however, the source of TCE was unknown. In April 2007, TCE-contaminated soil was discovered in discrete potential source areas within the TCE, and later tetrachloroethene (PCE), plumes. Installation and sampling of additional monitoring wells was conducted in November 2008 in order to delineate the horizontal and vertical extents of TCE and PCE groundwater contamination at the Site (Louis Berger, 2015).

Historically, TCE was documented at concentrations as high as 11 micrograms per liter ( $\mu\text{g/L}$ ) at off-site monitoring well MW-10 and 63  $\mu\text{g/L}$  at MW-11 in 2006. These monitoring wells were installed northwest of the Site, on private residential property. Monitoring wells MW-10 and MW-11 were subsequently abandoned in 2008 at the property owner's request and have not been replaced (Louis Berger, 2015). Based on contemporaneous analysis of the 2010 groundwater data, the groundwater flow direction did not appear to indicate that the plume was or would impact the residential properties to the north of the OMS #28 building. These residential properties were thought to be side and/or up gradient of the source and groundwater flow direction.

Groundwater compliance monitoring was conducted at the Site in December 2008, May 2009, September 2009, March 2010, and September 2010 at monitoring wells MW-5, MW-6, MW-8, MW-9, MW-12, and OMS-28-1 through OMS-28-7. The monitoring effort was implemented to document and monitor groundwater conditions at the Site (Louis Berger, 2015).

Initially, the OMS #28 chlorinated solvents plume was following a Resource Conservation and Recovery Act cleanup path due to the actions required following the discovery of TCE under the UST regulatory requirements. In September 2010, ALARNG submitted a request to ADEM to continue the activities at the site under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA). At the time, ALARNG was in the process of having an Alabama Risk-Based Corrective Action Report prepared and recommended using the existing data to develop an RI/FS. ADEM concurred with this approach in e-mail correspondence dated September 9, 2010 (ADEM, September 2010).

An RI, prepared by SAIC, reported a groundwater plume of TCE above the US Environmental Protection Agency (USEPA) Drinking Water Maximum Contaminant Level (MCL) occurring across the Site and adjacent properties within the shallow surficial aquifer. A smaller PCE plume was also reported within the larger TCE plume boundary occurring on the MAA property. The RI also noted that the horizontal extent of the TCE boundary in the area of the residential properties, as well as the vertical delineation of the groundwater plume had not been fully investigated (SAIC, May 2013).

Based on the compilation of data reported in the RI, an FS was prepared, which recommended biological/chemical treatment of groundwater and the excavation of soils at the site. The recommended alternative included the proposed injection of an emulsified vegetable oil substrate package or other carbon source for treatment of groundwater until the MCLs for TCE and PCE are achieved. To expedite the remedial timeframe following injection, this alternative also included the excavation of the residual soil mass that is acting as a continuing source for groundwater contamination; and transportation of the resulting waste to a permitted municipal solid waste landfill for disposal (Leidos, 2014).

Based on the investigative work completed prior to 2015, the potential source area for the TCE plume appeared to be in the vicinity of monitoring well MW-8, which corresponds with the largest suspected area of residual soil contamination. Monitoring well MW-8 is located near the former wash pad along the westernmost Site boundary, in an area where military vehicles and equipment are currently stored. PCE groundwater contamination appeared to be limited to the area surrounding monitoring well OMS-28-5, which is located within a densely wooded area west of the Site. It was noted during a site reconnaissance performed by Louis Berger in 2015 that in the 1960s and 1970s “Gunk” Energized Electric Motor Contact Cleaner was used as a cleaning agent. According to a retired ALARNG employee, “Gunk” was used during the same time period as the wash pad; however, there is no official record of “Gunk” being used in the vicinity of the wash pad (Louis Berger, 2015). According to Material Safety Data Sheets, “Gunk” cleaners may contain up to 90-100% PCE. Other information provided in the Historical Research Study Report (Louis Berger, 2015) indicates that a race track was located on Parcel F (adjacent to Parcel A).

In order to implement the recommended alternative in the FS, additional refinement of the Site’s conceptual site model (CSM) was required. AECOM was contracted to conduct a supplemental data gap investigation and groundwater monitoring event in order to determine if other soil source areas were contributing to groundwater contamination and to improve the delineation of the known groundwater contaminant plume (AECOM, January 2019). Please refer to the supplemental data gap report for information on the delineation of the soil source areas and groundwater contaminant plumes. The data used for this Risk Assessment Report were generated as part of this supplemental data gap investigation.



## 2.0 DATA COLLECTION AND EVALUATION

### 2.1 DATA COLLECTION

Data used in this risk assessment were collected between January 2016 and February 2018 and were analyzed for volatile organic compounds (VOCs). Soil data were collected in May 2017 from 31 locations across the area of investigation at three depths:

- surface soil (0.5 to 1 foot below ground surface [bgs]);
- area of highest VOC concentrations (which was identified by field equipment); and
- 1 foot above the soil/water interface, generally between 4 to 7 feet bgs.

The soil samples were analyzed by an on-site mobile laboratory, Columbia Technology, LLC, for PCE and TCE via USEPA Method SW8260B. As a quality check, split samples were collected at a frequency of 10% of the total soil samples and sent to an off-site fixed laboratory, Gulf Coast Analytical Laboratories, Inc. (GCAL), for analysis of target compound list (TCL) VOCs by USEPA Method SW8260B. Of the 93 total soil samples collected, nine were analyzed for full TCL VOCs, and 84 were analyzed only for PCE and TCE.

USEPA Region 4 generally considers soil from 0 to 1 foot bgs as surface soil and soil from depths greater than 1 foot as subsurface soil (USEPA, March 2018a). Therefore, the soil samples collected in this investigation from 0.5 to 1 foot bgs are considered surface soil, and samples collected below 1 foot bgs are considered subsurface soil.

Groundwater data were collected from 11 monitoring wells in January 2016 and again in May 2017 and were analyzed by GCAL for TCL VOCs using USEPA Method SW8260B.

In May 2017, discrete groundwater grab sampling was conducted, with locations selected based on the results of prior investigations, monitoring well analytical data results, and discrete groundwater analytical results provided by the on-site mobile lab during the investigation. Collected groundwater samples were analyzed by the on-site mobile laboratory, Columbia Technologies, LLC, for TCE and PCE via USEPA Method SW8260B. As a quality check, split samples were collected at a frequency of 10% of the total groundwater samples and sent to GCAL, for analysis of TCL VOCs by USEPA Method SW8260B.

In January/February 2018, a second mobilization occurred to further refine the extent of the groundwater plume. The groundwater samples were delivered to GCAL for analysis during this second discrete groundwater sampling mobilization for analysis of a refined TCL consisting of cis-1,2-dichloroethene (cis-1,2-DCE), PCE, TCE, and vinyl chloride.

A total of 226 groundwater grab samples were collected during these two events (May 2017 and January/February 2018) from multiple depths across 87 locations and analyzed for VOCs by the on-site mobile laboratory. Of these 226 individual grab samples, 49 were analyzed for cis-1,2-DCE, PCE, TCE, and vinyl chloride, and 177 were analyzed only for PCE and TCE. Seventeen of these 226 samples were also analyzed for TCL VOCs by GCAL, resulting in two results each for PCE and TCE. For these 17 samples, the PCE and TCE data from GCAL, and not from the on-site mobile laboratory, were used in the RA.

Surface water and sediment data were not collected, as no surface water bodies are located on or near the site.

The laboratory analytical data reports and data validation reports for each sample event are included in the *Supplemental Data Gap Investigation and Groundwater Monitoring Report* (AECOM, January 2019). A summary of the samples (including sample locations, depth intervals, dates collected, and analytical parameters) used in the RA is presented in **Table 1a** of this Risk Assessment Report. The locations of the soil and groundwater samples used in this risk assessment are shown on **Figure 3** of this Risk Assessment Report. The groundwater samples determined to be within the core area of the plume of VOCs at each parcel are shown in **Table 1b** and on **Figure 5**. A figure showing the nature and extent of VOC contamination in groundwater and spatial patterns with respect to the parcels is provided in the *Supplemental Data Gap Investigation and Groundwater Monitoring Report* (AECOM, January 2019).

## 2.2 DATA EVALUATION METHODOLOGY

The analytical data obtained from sampling efforts on and near the site were evaluated prior to use in the RA. The goal of data evaluation is to select data that are valid for use in the RA and to identify chemicals that potentially are site-related. Data selected for use in the RA include data from primary field samples with no associated qualifiers and data with qualifiers that indicate uncertainties in concentration but not in constituent identification (i.e., J-qualified data). The initial steps in identifying human health COPCs and chemicals of potential ecological concern (COPECs) involve evaluation and aggregation of data. Such steps for the evaluation of COPECs are discussed in Section 4.0.

After the analytical data were compiled, they were sorted based on medium, depth interval, and exposure area to form data groups for evaluation in the RA. An exposure area is a geographical area over which receptors are likely to average their exposures, based on observed or assumed patterns of receptor behavior and the patterns and extent of contamination. The data groups for each medium were sorted based on exposure areas to form exposure groups to be used in evaluating risk.

Based on the characteristics of this site and patterns of contamination and receptor exposure, the area of investigation was divided into the following eight parcels for evaluation:

- Parcel A - residential zoned parcel northwest of the site
- Parcel B - residential zoned parcel northwest of the site
- Parcel C - residential zoned parcel northwest of the site
- Parcel D – residential zoned parcel northwest of the site
- Parcel E – the ALARNG OMS #28 site
- Parcel F – Airport Authority property west of the site
- Parcel G – I-10 Service Road west of Parcels A, B, C, and F
- Parcel H – private residential property east of Parcel D and north of Parcel E.

The exposure groups for these parcels included three exposure groups each for surface soil and subsurface soil (soil samples were collected only from Parcels A, E, and F), and eight exposure groups for groundwater. The parcels are shown on **Figure 3**, along with the location of each soil and groundwater sample. Groundwater locations for Parcel D include GW91, which is northeast of this parcel. Groundwater locations for Parcel E include GW86, which is just off site of the National Guard property

(south of Parcel E). **Table 1a** shows a complete list of samples associated with each parcel, dates collected, depths, and analyses performed.

Additionally, VOCs detected in groundwater from the seven parcels sampled (Parcel H was not sampled) were defined as exposure groups for vapor intrusion, in which VOCs volatilize from shallow groundwater and enter buildings on the Site. Under current conditions, vapor intrusion is considered a potentially complete groundwater exposure pathway only for a resident who lives on Parcel H, the property immediately east of Parcel D. This residence is within 100 feet of the VOC plume beneath Parcel D and, therefore, is within the buffer where vapor intrusion should be evaluated (USEPA, June 2015). In this scenario, indoor air concentrations were modeled for a residence on Parcel H based on current groundwater concentrations at Parcel D.

Under future conditions, vapor intrusion is considered a potentially complete groundwater exposure pathway for an industrial worker and a hypothetical resident for all parcels, based on current groundwater concentrations measured across each parcel. The vapor intrusion pathway is of concern only for VOC contamination in shallow groundwater within 100 feet of an occupied building, and it was assumed that under future conditions, an industrial facility or a residence could be constructed and occupied on any of the seven parcels. Parcel H was assumed to remain residential in the future.

Those analytes not detected in any samples in a particular medium or exposure group were eliminated from the RA data set. Detected analytes in each exposure group are presented in **Tables 2 through 5**. Analytes were detected in surface and subsurface soil at Parcels A, E, and F, the only three parcels where soil samples were collected, and in groundwater at all seven parcels sampled (A through G).

Instances in which a chemical was not detected but its limit of detection (LOD) for that sample exceeded its screening value were assessed for their potential relevance and significance. In Parcel A soil, two samples (two separate depths at the same location) in which TCE was not detected had an elevated LOD for TCE. These samples were considered unlikely to affect the screening results given that none of the detected TCE concentrations in soil at this parcel exceeded the screening value. In groundwater, TCE and vinyl chloride were not detected in several samples in which their LODs exceeded their screening values, which were based on Regional Screening Levels (RSLs) for tapwater. However, the LODs did not exceed MCLs, which are the applicable or relevant and appropriate requirements (ARARs) for groundwater and ultimately are the basis for determining cleanup levels. Therefore, the elevated LODs in these soil and groundwater samples were not relevant or significant and did not affect the identification of COPCs in these media.

### 3.0 HUMAN HEALTH RISK ASSESSMENT

The purpose of the HHRA portion of a RA is to characterize the potential for carcinogenic risk and noncarcinogenic hazard to human receptors exposed to site-related constituents under current and hypothetical future land use conditions if no remedial action is performed. If a risk or hazard is determined, then SSSLs are developed for each scenario to mitigate risks. This is done by developing SSSLs for comparison to site concentrations. Constituent concentrations in environmental media measured under current conditions are assumed for the future exposure scenario.

The HHRA includes the following subsections: Identification of Chemicals of Potential Concern (Section 3.1); Exposure Assessment (Section 3.2); Exposure Point Concentrations (Section 3.3); Exposure Factors (Section 3.4); Toxicity Factors (Section 3.5); Calculation of Risks and Hazards (Section 3.6); Development of Site-Specific Screening Levels (Section 3.7); and Summary (Section 3.8).

The HHRA follows principles and procedures consistent with published USEPA guidance documents, including:

- Risk Assessment Guidance for Superfund (RAGS), Volume I, Human Health Evaluation Manual (Part A), Interim Final (USEPA, December 1989);
- RAGS, Volume I, Human Health Evaluation Manual (Part D, Standardized Planning, Reporting, and Review of Superfund Risk Assessments), Final (USEPA, December 2001);
- RAGS, Volume I, Human Health Evaluation Manual (Part E, Supplemental Guidance for Dermal Risk Assessment), Final (USEPA, July 2004);
- RAGS, Volume I, Human Health Evaluation Manual (Part F, Supplemental Guidance for Inhalation Risk Assessment), Final (USEPA, January 2009);
- Region 4 Human Health Risk Assessment Supplemental Guidance (USEPA, March 2018a); and
- OSWER Technical Guide for Assessing and Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air (USEPA, June 2015).

#### 3.1 IDENTIFICATION OF CHEMICALS OF POTENTIAL CONCERN

Risks were calculated and SSSLs were developed only for those analytes identified as COPCs. The evaluation conducted to identify COPCs in soil and groundwater utilized a conservative screening in which the maximum measured soil and groundwater concentration of each detected analyte at each parcel was compared to a chemical-specific risk-based screening level. The chemical-specific screening levels for each medium are from the following sources:

##### *Groundwater*

- USEPA regional screening levels (RSLs) for tap water, at a risk level of  $10^{-6}$  or a hazard quotient (HQ) of 0.1 (USEPA, November 2018a), based on exposure of residents via direct contact.

##### *Soil*

- USEPA RSLs for residential exposure to soil, at a risk level of  $10^{-6}$  or an HQ of 0.1 (USEPA, November 2018a), based on exposure via direct contact.

An analyte was eliminated as a COPC if its maximum detected concentration was less than its RSL. However, as per USEPA guidance (March 2018a), the chemical was retained as a COPC in groundwater, if its maximum detected concentration exceeded its USEPA MCL (November 2018a).

#### *Vapor Intrusion Screening*

Risk-based screening levels for groundwater concentrations based on the indoor air exposure pathway were derived using the USEPA Vapor Intrusion Screening Level (VISL) Calculator, (USEPA, June 2018). Screening concentrations were derived for both commercial/industrial and residential exposure scenarios using a groundwater temperature of 21 degrees Celsius (USEPA, September 2017a), and a target risk of  $1 \times 10^{-6}$  for carcinogens and a target HQ of either 0.1 or 1 for noncarcinogens. For parcels having only one detected chemical, an HQ of 1 was used in the calculator. For parcels having more than one detected chemical, an HQ of 0.1 was used to account for possible cumulative effects. The VISL Calculator includes those chemicals that are sufficiently volatile and toxic to potentially pose risk. That is, screening levels are calculated for chemicals that would volatilize from groundwater into indoor air and that have been identified as potentially causing carcinogenic risk or noncarcinogenic hazard through the inhalation pathway. The VOCs evaluated in the VISL calculator were those detected in groundwater samples, which would have the potential to volatilize from the groundwater and enter buildings on the Site. A VOC was eliminated as a vapor intrusion COPC if its maximum detected concentration was less than its VISL groundwater screening target concentration. The VISL calculator is presented in **Appendix A** as **Tables A-1 and A-2** for the commercial/industrial scenario based on target HQs of 0.1 and 1, respectively. **Tables A-3 and A-4** present the VISL calculator for the residential scenario based on target HQs of 0.1 and 1, respectively.

#### *COPC Summary*

The chemicals remaining in each medium and exposure group after the completion of screening constitute the human health COPCs. The COPCs identified through the methods and rationale described above are presented in **Tables 2 through 4** for surface soil, subsurface soil, and groundwater. These tables list the analytes detected in the exposure group, including their occurrence (maximum and minimum detected concentrations, location of maximum concentration), frequency of detection, range of laboratory detection limits, and screening value; and they indicate which analytes are COPCs and the rationale for their selection or deletion. **Table 5** presents the COPCs identified in groundwater for vapor intrusion based on industrial/commercial and residential scenarios. COPCs were identified in surface and subsurface soils only at Parcel A. COPCs were identified in groundwater and for vapor intrusion at Parcels A through F. COPCs identified for vapor intrusion on Parcel H were detected in groundwater on Parcel D. No COPCs were identified at Parcel G (the I-10 Service Road); therefore, this exposure group will not be evaluated further in this RA.

The following COPCs were identified:

Soil (both surface and subsurface): PCE

Groundwater – direct contact: PCE, TCE, cis-1,2-DCE, and vinyl chloride

Groundwater – vapor intrusion: PCE, TCE, and vinyl chloride

### 3.2 EXPOSURE ASSESSMENT

This section of the HHRA addresses the potential pathways by which human populations could be exposed to the COPCs identified in Section 3.1. In identifying potentially complete exposure pathways, both current and reasonably anticipated land use scenarios were considered. In addition, hypothetical future land uses of the site and surrounding area were also considered. The exposure assessment describes exposure scenarios and develops information on exposure pathways.

#### 3.2.1 Characterization of Exposure Setting

Section 1.2, Site Location and Description, describes the overall exposure setting in terms of the natural environment and land use. The description of the exposure setting provides information pertinent to the identification of potential human exposure pathways and the estimation of exposure factors for current and hypothetical future human receptors.

Potential receptors under current and reasonably anticipated future land use scenarios are industrial workers, who currently perform maintenance and office work at the ALARNG Facility (Parcel E) and could be exposed in the future if a building is constructed and regularly used as a workplace on the other parcels. Also under current and future conditions, trespassers could access all parcels from the zoned residential areas north of the site. Under current conditions, there are no residential structures located on the plume, but there is a residential home on Parcel H adjacent to Parcel D and within 100 feet of the plume. The decision was made to assume that the conditions present in the groundwater under Parcel D are also present under the residential home and to treat this as an exposure setting for the vapor intrusion/indoor air inhalation pathway only. There is currently no access to groundwater, so the other groundwater exposure routes are not assessed in the current resident scenario. While it is unlikely that future residents would be exposed to contaminated media at other parcels, a future, on-site, hypothetical resident was evaluated for all parcels to provide an upper-bound estimate of potential risk, in accordance with USEPA Region 4 guidance (USEPA, March 2018a). Another future exposure scenario evaluated was a construction worker assumed to perform excavation activities or work with underground utilities.

#### 3.2.2 Identification of Human Health Exposure Pathways

Potential human exposure pathways were identified for current and potential future land uses. An exposure pathway represents the course taken by a chemical from a source to an exposed receptor. A complete pathway includes: a chemical source and release mechanism, a transport or retention medium, an exposure point where human contact with the contaminated medium occurs, and a route of intake for the chemical into the receptor at the exposure point. If any of these elements is missing, the pathway is incomplete.

An exposure pathway diagram (EPD) was developed to illustrate the potential exposure pathways for the Site. This EPD is presented graphically in **Figure 4**. In the diagram, potentially complete exposure pathways that are likely to, or could potentially, result in significant exposure for a given receptor are indicated by an "X" in the box representing that pathway and receptor. A blank box indicates an incomplete pathway in which at least one of the pathway elements is missing. The following table provides a summary of the receptors potentially occurring at each parcel under current and future land-use scenarios and includes notes explaining why a given receptor was not evaluated at certain parcels or

for certain exposure pathways. A detailed description of each scenario and receptor and their associated exposure routes follows the table.

Parcel	Current Scenario				Future Scenario			
	Trespasser	Industrial Worker	Construction Worker	Resident	Trespasser	Industrial Worker	Construction Worker	Resident
A	X				X	X	X	X
B	X <sup>(2)</sup>				X <sup>(2)</sup>	X	X	X
C	X <sup>(2)</sup>				X <sup>(2)</sup>	X	X	X
D	X <sup>(2)</sup>				X <sup>(2)</sup>	X	X	X
E	X <sup>(1)</sup>	X <sup>(1, 4)</sup>			X <sup>(1)</sup>	X	X	X
F	X <sup>(1)</sup>				X <sup>(1)</sup>	X	X	X
G	X <sup>(3)</sup>				X <sup>(3)</sup>	X <sup>(3)</sup>	X <sup>(3)</sup>	X <sup>(3)</sup>
H				X <sup>(5)</sup>				X <sup>(5)</sup>

Notes:

- (1) Not evaluated because no COPCs were identified in surface soil for this parcel.
- (2) Not evaluated. This parcel is not within the soil source area, so surface soil samples were not collected.
- (3) Not evaluated because COPCs were not identified in any media sampled at this parcel.
- (4) Not evaluated because no groundwater plume is within 100 feet of the building currently used by industrial workers.
- (5) Evaluated only for vapor intrusion based on groundwater concentrations beneath Parcel D.

Current Land Use Scenario

Under current conditions, trespassers, industrial workers, and nearby residents are the human receptors with a potential for exposure to site-related constituents. Adolescent trespassers are assumed to access any of the parcels (other than Parcel H) from adjacent residential areas, with potential exposure routes including incidental ingestion of surface soil, dermal absorption of surface soil, and inhalation of airborne vapors from surface soil. However, no COPCs were identified in surface soil at Parcels B through G. Trespasser exposure to subsurface soil is not considered to be a complete pathway. Groundwater exposure pathways are incomplete for the trespasser.

The only parcel on the site with an existing building used by workers is Parcel E. The OMS #28 building (the ALARNG Facility) is on this parcel and consists of office space, a break room, and vehicle bays, where routine maintenance on military vehicles is performed. One vehicle wash rack is located north of the OMS #28 building, and another is located west of the building. Potential exposure routes for industrial workers include exposure to surface soil via incidental ingestion, dermal absorption, and inhalation of airborne vapors. However, no COPCs were identified in surface soil at Parcel E. Industrial workers are assumed to have no direct contact with subsurface soil under current conditions. Potential groundwater exposure pathways are incomplete under current conditions because there are no water supply wells

within a 1,000-foot radius of the site (Aerostar 2011), and drinking water is supplied to the area by the public water supply system. Inhalation of vapors migrating from groundwater into indoor air is considered an incomplete exposure pathway because no groundwater plume lies within 100 feet of the building. The maintenance worker who performs vehicle maintenance or uses the wash racks is not addressed as a separate receptor because the industrial worker is deemed to be sufficiently protective for on-site activities involving contact with soil at the surface.

Current residents (adult and child) may contact COPCs in groundwater through inhalation of vapors migrating from groundwater at Parcel D into the indoor air of an existing residence on an adjacent property Parcel H. Current residential exposure from direct contact with groundwater is not considered to be a complete pathway because this area is on city-supplied water. Although there are no residential structures located on the plume, there is a residential home on Parcel H adjacent to Parcel D and within 100 feet of the plume. The decision was made to assume that the conditions present in the groundwater under Parcel D may affect the residential home on Parcel H and to treat the inhalation of VOCs in indoor air due to vapor intrusion as an exposure pathway in the current land use scenario for Parcel H. Exposure of current residents to surface and subsurface soil is not assessed as there are no current residents in areas with soil contamination. Potential exposures to surface soils under current conditions are accounted for in a trespasser scenario.

#### Future Land Use Scenarios

Future exposures for a trespasser at Parcel A, the only parcel with surface soil COPCs identified, and a resident at Parcel H, were assumed to remain the same as under the current land use scenario. The future industrial worker could be exposed at any of Parcels A through G, assuming a new facility was to be built in any of these locations. However, COPCs in surface and subsurface soil were identified only at Parcel A. In accordance with USEPA Region 4 guidance (USEPA, March 2018a), a hypothetical on-site resident also was assumed to be a future receptor at Parcels A through H. An additional receptor with the potential for future exposure to site-related constituents at Parcels A through G was assumed to be a construction worker. As discussed previously, however, no COPCs were identified in any media at Parcel G; therefore, no future receptors will be evaluated for exposure from this parcel.

For future industrial workers, potential exposure routes to COPCs in surface soil include incidental ingestion, dermal absorption, and inhalation of airborne vapors. Industrial workers are assumed to be exposed to subsurface soil that has been excavated during construction of an industrial building and spread on the surface; potential exposure routes include incidental ingestion and dermal absorption. Additionally, there is potential exposure to groundwater through ingestion and dermal contact, assuming that groundwater would be used as a potable water source. Inhalation of vapors migrating from groundwater into indoor air is also considered a potentially complete exposure pathway at each parcel.

A future construction worker may have the potential for exposure during excavation activities at all parcels, such as during construction of a building or installation or repair of underground utilities. A construction worker engaged in such activities may contact chemicals in surface and subsurface soil through ingestion and dermal exposures, and could potentially inhale chemicals from surface and subsurface soil as airborne vapors. Construction worker exposures to groundwater also could potentially occur through incidental ingestion of, dermal contact with, and inhalation of VOCs while working in excavations that extend below the water table.



Future residents (adult and child) may contact COPCs in surface soil through ingestion, dermal, and inhalation exposure and subsurface soil through ingestion and dermal exposure (residents are assumed to be exposed to subsurface soil that has been excavated during construction of a residence and spread on the surface). It was conservatively assumed that direct exposures to site groundwater could occur through the use of an on-site well as a potable water source. Potentially complete groundwater exposure pathways for a resident include groundwater ingestion, dermal absorption while bathing, and inhalation of vapors from showering and other household uses of water from an onsite well. Additionally, inhalation of vapors migrating from groundwater into indoor air is considered a potentially complete exposure pathway.

### 3.3 EXPOSURE POINT CONCENTRATIONS

Human exposures were evaluated based on a reasonable maximum exposure (RME), which is the maximum exposure that is reasonably expected to occur at a site. The RME is a conservative exposure case that is within the range of possible exposures for each potentially complete pathway (USEPA, December 1989). The sampling data collected were used to calculate EPCs. The media evaluated in the HHRA are surface and subsurface soil and groundwater. Surface soil (0.5 to 1 foot bgs) and subsurface soil (1 to 6 feet bgs) are evaluated separately. While USEPA Region 4 generally considers surface soil as the interval from 0 to 1 foot bgs, the surface interval collected at this site was from 0.5 to 1 foot bgs. USEPA considers subsurface soil as soil from deeper than 1 foot bgs, and the subsurface interval collected at the site was from 1 to 6 feet bgs. All surface soil and subsurface soil locations were used.

Individual groundwater data sets were developed for evaluating exposure through direct contact and through vapor intrusion. In order to address USEPA's recommendation to base groundwater EPCs for direct contact on data collected from "wells within the core/center of the plume" (USEPA, February 2014), the groundwater data set for each parcel used to calculate EPCs includes only elevated concentrations from locations that make up the approximate core/center of the plume of VOC contamination for that parcel. In order to identify the core of the individual groundwater plumes for Parcels A through F, elevated concentrations of each groundwater COPC and their locations were identified for each parcel. For each parcel, the core of the groundwater plume of contamination was determined based on highest concentrations of the groundwater COPCs and their spatial proximity to one another. Groundwater locations with low or nondetected concentrations were not considered part of the core of the plume, except for the following: for locations identified as part of the core of the plume, concentrations were included from all depths sampled at that location. For monitoring well locations within the core of a plume, concentrations from both sampling events were included. The concentrations of VOCs in each groundwater sample and the rationale for including specific samples in the core of the VOC plume at each parcel are provided in **Table 1b**, and the groundwater sample locations identified as being in the core of the VOC plume at each parcel are shown on **Figure 5**. The locations, including depths, identified as being in the core of the groundwater plumes for Parcels A through F are shown below and are the same for each COPC identified for a given parcel. Parcel G did not have any COPCs identified in groundwater, and groundwater was not sampled at Parcel H.

Parcel A - OMS-28-GW19-12, -GW19-19, -GW19-30, -GW22-11, -GW22-20, -GW22-28, -GW23-12, -GW23-20, -GW23-28, -GW24-12, -GW24-19, -GW24-30, -GW39-13, -GW39-20, -GW39-28, -GW40-13, -GW40-20, and -GW40-28;

Parcel B - OMS-28-GW43-12, -GW43-20, and -GW43-28;

Parcel C - OMS-28-GW44-28;

Parcel D - OMS-28-GW46-16, -GW46-33, -GW64-16, -GW64-33, and -GW75-29;

Parcel E - OMS-28-GW32-12, -GW32-19, -GW32-31, -GW85-13, -GW85-19, -GW85-31, -GW86-12, -GW86-16, -GW86-31, and -GW87-31; and

Parcel F - OMS-28-5\_050517, -5-012016, -GW18-12, -GW18-18, -GW18-30, -GW20-12, -GW20-19, -GW20-28, -GW21-12, -GW21-18, -GW21-30, and -GW51-30.

For migration of groundwater vapors to indoor air via vapor intrusion, the data set includes the COPCs at each parcel that exceed the VISL target groundwater concentration (**Table 5**). The core of the groundwater plume for each parcel, consisting of the locations shown above, was also generally considered the core of the plume for migration of groundwater vapors to indoor air. The groundwater locations screened below 26 feet bgs were not considered part of the plumes used for evaluation of vapor intrusion because of the characteristics of the stratigraphy of the soils, which have multiple confining clay lenses that inhibit upward migration of contaminants.

The EPCs used for calculating the risk from inhalation of chemicals volatilized from groundwater during construction activities were calculated using the Virginia Department of Environmental Quality (VDEQ) model for volatiles in a construction/utility trench (VDEQ, 2015). The chemical-specific factors used in the VDEQ calculations are provided in **Appendix C**.

To determine the RME concentrations of COPCs in soil and groundwater, USEPA's ProUCL Version 5.1.002 software (Singh and Maichle, 2013) was used. This program determines the upper confidence level (UCL) of the mean computation that best fits the analytical data for each COPC. ProUCL is designed to test the normality of a data set and compute a conservative and stable UCL of the true population mean while considering sample size, the distribution of the data, and the skewness of the data. ProUCL calculates UCLs of the arithmetic mean with a specific confidence level (95% or greater) using 15 computational methods for full data sets without any nondetected results and several computation methods for data sets containing nondetects, and it recommends the most appropriate UCL(s) based on the data. In identifying the appropriate data for use with ProUCL, non-detects and estimated concentrations below the laboratory detection limit were reported. ProUCL output for each COPC in soil and groundwater is provided in **Appendix B**.

Because of the uncertainty associated with any estimate of an EPC, the 95% UCL is generally used as the RME concentration. In cases where the 95% UCL exceeds the maximum detected concentration, the maximum detected concentration was used to estimate the RME concentration, in accordance with USEPA guidance (USEPA, December 1989). Also, in cases where the 95% UCL could not be calculated (e.g., due to too few detected concentrations), the maximum concentration was used to estimate the RME concentration. The EPC tables (**Tables 6 through 9**) list the following for each COPC: the arithmetic mean and 95% UCL (if calculated); the maximum detected concentration and data qualifiers; and the EPC value, EPC statistic (95% UCL or maximum), and the rationale for use of the cited statistic.

### 3.4 EXPOSURE FACTORS

The exposure factors for the trespasser, industrial worker, construction worker, and on-site resident, and the guidance on which they are based, are shown on **Tables 10 through 13** for the ingestion, dermal, and inhalation intake routes of soil; **Table 14** for ingestion and dermal intake routes of groundwater; and **Tables 15 and 16** for inhalation intake routes of groundwater. Some factors, such as body weight and averaging time, have general application across exposure routes and receptors, while the ingestion rate

is specific to the exposure pathway. Most of the exposure parameters are standard values that are available in risk assessment guidance documents (as referenced in **Tables 10 through 16**). For example, the on-site resident receptors are evaluated based on an adult (age range from birth to 26 years) and a child (age range from birth to 6 years). The values used for the residential exposure parameters and the industrial worker exposure parameters are USEPA standard default values for the reasonable maximum exposure (**Tables 12 through 16**).

However, some parameters are derived from site-specific information and/or professional judgment regarding the specific exposure scenario. For example, the exposure duration of 1 year for the construction worker is based on the assumed length of a construction project at the exposure area. The t-event (event duration) of 4 hours/day for exposure to groundwater assumes that the construction worker would be working in an excavated area at or below the water table for 4 hours each day, during 250 days of the 1-year project construction duration (see **Tables 14 and 16**). For the trespasser, the exposure frequency of 100 days per year for the trespasser is based on the assumption that the trespasser visits the exposure area approximately 2 days per week for 12 months of the year (**Tables 10 and 11**).

### 3.5 TOXICITY FACTORS

Toxicological data for the COPCs, including carcinogens and noncarcinogens, are presented in **Table 17**. Based on USEPA guidance (USEPA, December 2003), the most current toxicity values were obtained from the following hierarchy of sources: (1) USEPA Integrated Risk Information System, (2) USEPA Provisional Peer-Reviewed Toxicity Values Database, and (3) California Environmental Protection Agency values, Health Effects Assessment Summary Tables, Agency for Toxic Substances and Disease Registry Minimal Risk Levels, and other peer reviewed sources.

The toxicity criterion used to evaluate potential carcinogens is the cancer potency slope (potency factor). A potency factor is defined as the “plausible upper-bound estimate of the probability of a response (i.e., cancer) per unit intake of a chemical over a lifetime” (USEPA, December 1989). Potency factor values are specific to the route of exposure (i.e., ingestion or inhalation). The oral potency factor is the slope factor (SF), which is “an upper bound, approximating a 95% confidence limit, on the increased cancer risk from a lifetime exposure to an agent. This estimate [is] usually expressed in units of proportion (of a population) affected per mg/kg-day [milligrams per kilogram per day]...” (USEPA, May 2011). The inhalation potency factor, the inhalation unit risk (IUR), is “the upper bound excess lifetime cancer risk estimated to result from continuous exposure to an agent at a concentration of 1 microgram per cubic meter ( $\mu\text{g}/\text{m}^3$ ) in air” (USEPA, May 2011). The interpretation of IUR would be as follows: if unit risk =  $2 \times 10^{-6}$  per  $\mu\text{g}/\text{m}^3$ , this means that an individual could have, at most, a 2 in one million chance of developing cancer if exposed daily over a 70-year lifetime to 1  $\mu\text{g}$  of the chemical per  $\text{m}^3$  of air. Oral and inhalation carcinogenic toxicity data, including the SF and IUR, for the COPCs are summarized in **Table 17**.

For exposure to noncarcinogens through ingestion, the dose-response information is presented by USEPA in the form of a reference dose (RfD). The RfD is defined as “an estimate (with uncertainty spanning perhaps an order of magnitude) of a daily oral exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime” (USEPA, May 2011). For exposure to noncarcinogens through inhalation, the dose-response information is presented by USEPA in the form of a reference concentration (RfC). The RfC is defined as “an estimate (with uncertainty spanning perhaps an order of magnitude) of a continuous inhalation exposure to the

human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime” (USEPA, May 2011).

Subchronic RfDs and RfCs were used to calculate SSSLs for the construction worker. These noncarcinogenic toxicity factors are generally used instead of chronic factors to evaluate shorter-term exposure, which is appropriate based on an exposure duration of 1 year for a construction worker. Oral and inhalation noncancer chronic and subchronic toxicity data, available for the COPCs, are summarized in **Table 17**.

Most oral toxicity values are derived from critical studies that use an administered dose, while a dermal toxicity value should reflect the fact that dermal exposure is a measure of an absorbed dose. Consequently, and consistent with USEPA risk assessment guidance, oral toxicity values should be adjusted from administered to absorbed doses for use in evaluating dermal toxicity. When appropriate, oral SFs and RfDs derived from a critical study that used an administered dose are adjusted using the gastrointestinal (GI) absorption efficiency (percent absorbed by the GI tract following oral intake). If the GI absorption of the chemical (from a medium similar to the one used in the toxicity value critical study) is less than 50 percent, its oral absorption efficiency (percent absorbed) was used to calculate an adjusted SF or RfD. For a chemical whose absorption is greater than 50 percent, a default value of 100 percent (complete oral absorption) was used. GI absorption values, based on USEPA recommendations of chemicals to adjust as well as their absorption efficiencies as provided in *RAGS, Part E* (USEPA, July 2004), are provided in **Table 17**. None of the oral SFs or RfDs requires adjustment. Based on the *Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens* (USEPA, March 2005), risk assessors should consider life-stage differences in both exposure and dose-response when assessing cancer risk resulting from early-life exposures. Age-dependent adjustment factors (ADAFs) in dose response (i.e., slope factors) have been developed by USEPA and are combined with age-specific exposure estimates when assessing cancer risks. ADAFs are only to be used for agents with a mutagenic mode of action for carcinogenesis when chemical-specific data are absent. Two of the chemicals identified as COPCs for the Site (TCE and vinyl chloride in groundwater) have been designated by USEPA as having a mutagenic mode of action for carcinogenesis (USEPA, November 2018a).

The evaluation of TCE requires the use of different toxicity values for cancer and mutagenic effects (USEPA, November 2018b). USEPA’s assessment of vinyl chloride toxicity concludes that higher cancer risks result from exposure early in life compared to exposure during adulthood (USEPA, November 2018b). Exposure factors for both of these mutagenic COPCs are provided in **Appendix D**, and the methodology required to address both of these is included in the RSL Calculator in identifying SSSLs for the adult resident exposed to both soil and tapwater.

### **3.6 CALCULATION OF RISKS AND HAZARDS**

Risks and hazards for the COPCs identified in soil and groundwater were calculated for the receptors and exposure pathways identified for evaluation in the EPD (see Section 3.2.2) and for each parcel across the area of investigation. Human exposures were addressed based on the reasonable maximum exposure, which is a conservative exposure case that is within the range of possible exposures for each potentially complete pathway (USEPA, 1989). The risk and hazard results include estimates of the potential for excess lifetime cancer risks and noncancer health effects for the current land use and hypothetical future

land use scenarios. Cancer risk and/or noncancer hazard estimates are calculated for each COPC for which toxicity values are available, Chemical-specific RME risks and hazards for each pathway are presented in **Appendix E (Tables E-1 through E-27)**. Exposure factor tables specific to calculating exposure from dermal absorption of groundwater are provided in **Appendix C**, and risk estimation tables for chemicals with a mutagenic mode of action for carcinogenesis are provided in **Appendix D**.

Excess lifetime cancer risks reflect the incremental upper bound probability of an individual developing cancer over a 70-year lifetime from continuous, pathway-specific exposure to potentially carcinogenic chemicals. The excess lifetime cancer risk for the ingestion and dermal pathways was calculated by multiplying the daily intake by the cancer slope factor. For the inhalation pathway, the excess lifetime cancer risk was calculated by multiplying the inhalation exposure concentration by the IUR.

The carcinogenic risk estimate is generally an upper-bound estimate because the slope factor and IUR are typically derived as the upper 95th percentile confidence limit of the probability of response based on experimental animal data (USEPA, 2011; USEPA, 1989). Thus, USEPA is reasonably confident that the “true risk” will not exceed the risk estimate derived through use of the slope factor and IUR and is likely to be less than that predicted (USEPA, 1989). Excess lifetime cancer risks were calculated for each COPC and were also summed to calculate total risks for the ingestion, dermal, and inhalation exposure pathways for each medium.

The excess lifetime cancer risk, which describes the increased probability of an individual developing cancer from the evaluated exposure scenario over a 70-year lifetime, typically is expressed in scientific notation (e.g.,  $1 \times 10^{-6}$ , meaning one in one million) or exponential form (e.g., 1E-6). USEPA recognizes a generally acceptable cumulative excess cancer risk range (i.e., total risk to a given receptor) of between  $1 \times 10^{-6}$  and  $1 \times 10^{-4}$  (i.e., between one in one million and one in ten thousand) (USEPA, 1989; USEPA, March 2018a). USEPA Region 4 generally has indicated that risks falling within the range of  $1 \times 10^{-6}$  to  $1 \times 10^{-4}$  should be evaluated to determine if risk reduction is feasible. Risk levels less than  $1 \times 10^{-6}$  generally are considered *de minimis*. Risks greater than  $1 \times 10^{-4}$  for an individual receptor, summed from all pathways, media, and routes, generally are considered significant (USEPA, March 2018a).

Noncancer hazards were evaluated by comparing the estimated intake or exposure level over a specified time period to an RfD or RfC derived for a similar exposure period. The value derived is a chemical-specific HQ. HQs were calculated by dividing the oral or dermal intake by the oral or dermal RfD, or dividing the inhalation exposure concentration by the RfC. Thus, the oral/dermal HQ is a ratio of the chronic daily intake to the RfD and the inhalation HQ is a ratio of the estimated chronic daily exposure concentration to the RfC. HQs are not an estimate of the likelihood that an effect will occur but rather an indication of whether there is potential cause for concern for adverse effects. Furthermore, the magnitude of an HQ is not a direct guide to the potential severity of effect because there is considerable variability in the derivations of RfDs and in the type and severity of critical effect on which the RfDs are based. The HQs for individual chemicals were summed for each exposure pathway to calculate a pathway-specific hazard index (HI) for each exposure route, point, and medium.

### 3.6.1 Soil and Groundwater Risks and Hazards Based on Direct Contact

Carcinogenic risks and noncarcinogenic hazards were developed for receptors potentially exposed to site-related contaminants identified as COPCs in soil and groundwater at all parcels of the site. As described in Section 3.2.2 (Identification of Human Health Exposure Pathways), under current land use

scenarios, soil exposure pathways are considered potentially complete for a trespasser on Parcels A through G and for an industrial worker on Parcel E. The indoor-air-via-vapor-intrusion pathway is considered complete only for a current resident living in a home on Parcel H, which is within 100 feet of the groundwater plume at Parcel D. Under potential future land use scenarios, soil exposure pathways are considered complete for a trespasser, and both soil and groundwater pathways are considered complete for an industrial worker, construction worker, and resident (adult and child).

The trespasser may be exposed to COPCs in surface soil through incidental ingestion, dermal absorption, and inhalation of airborne vapors. The construction worker may be exposed to COPCs in soil through incidental ingestion, dermal absorption, and inhalation of airborne vapors and to COPCs in groundwater through incidental ingestion, dermal absorption, and inhalation of vapors while working in excavations that extend below the water table. The industrial worker may be exposed to COPCs in soil through incidental ingestion, dermal absorption, and inhalation of airborne vapors and to COPCs in groundwater used as potable water through ingestion and dermal absorption. The on-site resident may be exposed to COPCs in soil through incidental ingestion, dermal absorption, and inhalation of airborne vapors and to COPCs in groundwater used as potable water through ingestion, dermal absorption while bathing, inhalation of vapors from showering and other household uses of water from an on-site well, and inhalation of vapors migrating from groundwater into indoor air.

### 3.6.2 Groundwater Risks and Hazards Based on Vapor Intrusion

Indoor air concentrations were modeled based on current concentrations measured in groundwater beneath the parcels. The vapor intrusion pathway is of concern only for VOC contamination in shallow groundwater within 100 feet of an occupied building (USEPA, June 2015). Under current conditions, an existing residence is located only on Parcel H, which is a property adjacent to Parcel D and within 100 feet of the identified groundwater plume beneath Parcel D. It was assumed that under future conditions, an industrial facility or a residence could be constructed and occupied on any parcel (except that Parcel H was assumed to remain residential). The Johnson and Ettinger Vapor Intrusion model was used to evaluate the vapor intrusion pathway for a current and future resident in a home on Parcel H and for a future industrial worker and a future resident on all other parcels. Groundwater COPCs for vapor intrusion include PCE, TCE, and vinyl chloride. The vapor intrusion pathway was evaluated for both current and future on-site industrial workers and residents using version 6.0 of the Johnson and Ettinger model (USEPA, September 2017b). The predicted indoor air concentration due to vapor intrusion derived in these spreadsheets was used as the EPC for calculating risk in indoor air. Printouts from the model runs are provided in **Appendix F.1** for the individual COPCs and parcels.

Site-specific values were used as input for the model variables to the extent possible. The site-specific values used as input to the spreadsheet program for both a worker and a resident were taken from the CSM (AECOM, 2018). These inputs include depth below grade to water table and thickness of soil stratum A (2.44 meters for Parcels A through D, 1.83 meters for Parcel E, and 1.52 meters for Parcel F); soil stratum directly above the water table (stratum A for Parcels A through F); soil stratum A SCS soil type (loamy sand for Parcels A through F); average groundwater temperature (21 degrees Celsius for Parcels A through F); and a "slab-on-grade" building foundation type (found on Parcels A through F).

Default values included enclosed space floor area of 1,500 square meters, enclosed building space height of 3 meters, and indoor air exchange rate of 1.5 for the worker for all parcels. For the resident,

default values included enclosed space floor area of 150 square meters, enclosed building space height of 2.44 meters, and indoor air exchange rate of 0.45. The site-specific and default values are shown on the printouts provided in **Appendix F.1**.

Receptors at Parcels A through F and at Parcel H were evaluated for the site (No COPCs were identified at Parcel G). The calculations of cancer risks and noncancer hazards are presented in **Tables E-1 through E-27**.

### 3.6.3 Summary of Risks and Hazards

**Table 18** provides a summary across pathways, media, and parcels of the medium-specific risks and hazards, total risks, and total HIs for each receptor. Under a current scenario, there is no risk or hazard on any parcel. For future scenarios, some level of risk or hazard was identified on Parcels A through F. There is no identified risk or hazard for Parcel G under either a current or future scenario.

## 3.7 DEVELOPMENT OF SITE-SPECIFIC SCREENING LEVELS

SSSLs for the COPCs in soil and groundwater were derived for the exposure scenarios identified as potentially posing a risk or hazard. Human exposures were addressed based on the reasonable maximum exposure, which is a conservative exposure case that is within the range of possible exposures for each potentially complete pathway (USEPA, December 1989). USEPA's RSL Calculator was used to calculate SSSLs when possible. For receptors and pathways not included in the RSL Calculator, standard intake and risk equations as provided in RAGS, Volume I, Human Health Evaluation Manual (Part A) (USEPA, December 1989) and subsequent USEPA risk assessment guidance were used. The risk equations were rearranged to solve for the concentration term and the calculations were performed at predetermined levels of risk or hazard. There are separate cancer and non-cancer equations used to derive SSSLs, which for carcinogens, were calculated for target risk levels of  $1 \times 10^{-6}$ ,  $1 \times 10^{-5}$ , and  $1 \times 10^{-4}$ , and for noncarcinogens, were calculated for target HQs of 0.1, 1, and 3. The SSSLs for the resident child are based only on noncarcinogenic effects, which is the methodology used by USEPA for developing residential RSLs (USEPA, November 2018b). The SSSLs calculated for each receptor are presented in **Appendix G**.

SSSLs were developed for receptors potentially exposed to site-related contaminants in soil and groundwater at all parcels of the site and for the same exposure pathways under current and future land use scenarios as discussed in Section 3.6.1, for the calculation of risks and hazards. SSSLs were calculated only for chemicals of concern (COCs), those chemicals with a significant contribution to a pathway in a use scenario for a receptor that either (a) exceeds a  $1 \times 10^{-4}$  cumulative site cancer risk or (b) exceeds a non-carcinogenic HI of 1 (USEPA, March 2018a).

The Johnson and Ettinger Vapor Intrusion model was used to evaluate the vapor intrusion pathway for a current and future resident in a home on Parcel H and for a future industrial worker and a future resident on all other parcels. The spreadsheet program, which calculates risk based on an existing groundwater concentration, also calculates a risk-based groundwater concentration, which was used as the SSSL. Default and site-specific factors used in the model for calculation of risks (discussed in Section 3.6.2) were also used for calculating the SSSLs. Printouts from the model runs are provided in **Appendices F.2** (based on risk of  $10^{-6}$ ), **F.3** (based on risk of  $10^{-5}$ ), and **F.4** (based on risk of  $10^{-4}$ ), for the individual COPCs and parcels.

USEPA's RSL calculator was used to identify SSSLs (based on risk of  $10^{-6}$ ,  $10^{-5}$ , and  $10^{-4}$ ) for the construction worker (**Tables G.1-1, G.2-1, and G.3-1**), industrial worker (**Tables G.1-2, G.2-2, and G.3-2**), and adult resident (**Tables G.1-3, G.2-3, and G.3-3**) exposed to soil for the ingestion, dermal, and inhalation routes and for the adult resident exposed to tapwater (**Tables G.1-4, G.2-4, and G.3-4**) for these same three intake routes. The climatic zone selected for use in the RSL Calculator for identifying soil SSSLs (**Appendices G.1, G.2, and G.3 Tables 1 through 3**) was that of Atlanta, Georgia, the city with climatic conditions most likely to be similar to the Site. Since the RSL Calculator does not present the option to calculate SSSLs for all receptors or media evaluated in this RA, the equations used to derive RSLs (USEPA, November 2018b) were used to calculate SSSLs for these receptors and media. The volatilization factor of 2790 m<sup>3</sup>/kg for PCE, provided by the RSL Calculator, was used to calculate the soil SSSLs by this method.

Calculation of the SSSLs (PCE and TCE) for a construction worker exposed to groundwater through ingestion, dermal absorption, and inhalation of vapors is shown on **Tables G.1-5c, G.2-5c, and G.3-5c**. In order to calculate the inhalation component of these SSSLs, the Virginia Department of Environmental Quality trench model (VDEQ, 2015) was used, which models vapor concentrations in a construction/utility trench resulting from migration from groundwater in contact with the trench. Initially, exposure factors for a construction worker were used to calculate the concentration in the air in the trench for each COPC. These calculations were done separately based on risks of 1E-6, 1E-5, and 1E-4, and HQs of 1 (**Tables G.1-6, G.2-6, and G.3-6**). These concentrations in air were then used in the trench model (**Tables G.1-7b, G.2-7b, and G.3-7b**) to back-calculate the concentrations for each COPC in groundwater that would yield such concentrations in air. Inputs used in the trench model are shown on **Tables G.1-7a, G.2-7a, and G.3-7a**. These groundwater concentrations were used as the inhalation components in the cancer and noncancer SSSL calculations for the construction worker (**Tables G.1-5c, G.2-5c, and G.3-5c**).

Calculation of the SSSLs (PCE and TCE) for an industrial worker exposed to groundwater through ingestion and dermal absorption is shown on **Tables G.1-8c, G.2-8c, and G.3-8c**.

For a resident child, calculation of the SSSL (PCE) is shown on **Tables G.1-9, G.2-9, and G.3-9** for exposure from ingestion, dermal absorption, and inhalation of vapors from soil. Calculation of the SSSLs (cis-1,2-DCE, PCE, and TCE) from ingestion and dermal absorption of groundwater are shown on **Tables G.1-10c, G.2-10c, and G.3-10c**.

The equations and parameters used to derive absorbed dose (DA<sub>event</sub>) for COPCs in groundwater, which is a component of the dermal intake calculation, are provided in **Appendix Tables 11 and 12** in **Appendices G.1, G.2, and G.3**. These tables are further developed in **Appendices G.1, G.2, and G.3 Tables 5a, 8a, and 10a** for the construction worker, industrial worker, and resident child, respectively. Exposure factors used in calculation of the SSSLs for the construction worker, industrial worker, and resident child are provided in **Appendices G.1, G.2, and G.3 Tables 5b, 8b, and 10b**, respectively.

A summary of the SSSLs for the COPCs in surface soil, subsurface soil, and groundwater based on direct contact and vapor intrusion is provided in **Table 19**. This table presents the EPCs, discussed in Section 3.3, the SSSLs, discussed in this section, and MCLs for groundwater COPCs, if available. Individual receptors are listed for each parcel, and the COCs are shown by medium and exposure route for each receptor.



### 3.8 SUMMARY

Risks and hazards were determined; SSSLs were then developed for receptors potentially exposed to site-related contaminants identified as COCs in surface soil, subsurface soil, and groundwater at eight separate parcels on and near the OMS #28 site. Potential receptors and exposure pathways were evaluated based on the current and future land-use scenarios.

#### Current Exposure Scenarios

Under current conditions, potential surface-soil exposure routes are complete for trespassers at Parcels A through G and for an industrial worker at Parcel E, where an existing maintenance/office building is located. At the three parcels from which soil samples were collected (Parcels A, E, and F), only one COPC (PCE on Parcel A) was identified based on exposure to surface or subsurface soils. Risk and hazard were calculated for a current trespasser at Parcel A, but were insignificant. Risk and hazard were not calculated for a current industrial worker at Parcel E, since no COPCs were identified in soil at this parcel.

Inhalation of VOCs in groundwater via vapors migrating from groundwater to indoor air is a potentially complete exposure route identified only for a current resident living on Parcel H and exposed to VOCs from groundwater beneath Parcel D. Although there are no residential structures located on Parcel D, there is a residential home on Parcel H adjacent to Parcel D and within 100 feet of the TCE plume beneath Parcel D. According to USEPA guidance, a VOC plume within 100 feet of an occupied structure provides a potential exposure pathway via vapor intrusion and indoor air inhalation. Risk and hazard were calculated for a current adult and child resident on Parcel H, but were insignificant.

Therefore, under the current exposure scenario, there is no risk or hazard identified from exposure to surface or subsurface soil or from groundwater via vapor intrusion at any of the parcels on the area of investigation.

#### Future Exposure Scenarios

Under future conditions, the receptors with a potential for exposure to site-related contaminants are considered to be trespassers, industrial workers, construction workers, and hypothetical on-site residents. Potential exposures to surface soil at Parcels A through G for a trespasser in the future would remain the same as under current conditions. Potential exposure pathways for future industrial workers at Parcels A through G include exposure to COPCs in surface soil through incidental ingestion, dermal absorption, and inhalation of airborne vapors and subsurface soil through incidental ingestion and dermal absorption. Industrial workers are assumed to be exposed to subsurface soil that has been excavated during construction of an industrial building and spread on the surface. Future industrial workers also are assumed to be exposed to groundwater via direct contact (ingestion and dermal) and the inhalation of VOCs in groundwater via vapors migrating from groundwater to indoor air (vapor intrusion).

Potential exposure pathways for future construction workers at Parcels A through G include exposure to COPCs in soil and groundwater through incidental ingestion, dermal absorption, and inhalation of vapors from groundwater while working in excavations that extend below the water table.

For future adult and child residents, potential exposure pathways at Parcels A through G include exposure to COPCs in surface soil through incidental ingestion, dermal absorption, and inhalation of

airborne vapors and subsurface soil through incidental ingestion and dermal absorption. Residents were assumed to be exposed to subsurface soil that has been excavated during construction of a residence and spread on the surface. It was conservatively assumed that exposures to site groundwater could occur through the use of an on-site well as a potable water source, with exposure occurring through direct ingestion, dermal contact, inhalation of vapors during showering and other household uses of water from an on-site well, and inhalation of groundwater VOCs in indoor air via the vapor intrusion pathway.

As under the current exposure scenario, there is no future risk from exposure on Parcel G, where soil samples were not collected and COPCs were not identified in groundwater, or from exposure on Parcel H. However, there is some level of carcinogenic risk and/or non-carcinogenic hazard for future receptors (construction workers, industrial workers, and/or residents) on Parcels A through F.

## 4.0 SCREENING LEVEL ECOLOGICAL RISK ASSESSMENT

### 4.1 THE ECOLOGICAL RISK ASSESSMENT (ERA) PROCESS

The ERA component of a BRA evaluates whether chemical stressors in the environment pose unacceptable risks to ecological receptors. The ERA identifies contaminant levels that would not pose unacceptable ecological risks and provides information for risk management decisions regarding the need for and extent of potential remedial action (USEPA, November 2001). The process followed in performing the ERA was based on the current USEPA model for conducting ecological risk assessment, as described in the *Ecological Risk Assessment Guidance for Superfund (ERAGS): Process for Designing and Conducting Ecological Risk Assessments* (USEPA, June 1997) and *The Role of Screening-Level Risk Assessments and Refining Contaminants of Concern in Baseline Ecological Risk Assessments* (USEPA, June 2001). Additional risk assessment guidance considered in developing the ERA process includes the *Guidelines for Ecological Risk Assessment* (USEPA, April 1998) and the *Region 4 Ecological Risk Assessment Supplemental Guidance* (USEPA, March 2018b).

The ERAGS process is the principal model for ERAs in USEPA Region 4. The eight steps of the ERAGS process in Region 4 are as follows:

#### Screening-Level Ecological Risk Assessment (SLERA)

Step 1: Initial Problem Formulation and Effects Evaluation

Step 2: Exposure Estimation and Risk Calculation

#### Baseline Ecological Risk Assessment

Step 3: Baseline ERA Problem Formulation

Step 3a: Problem Formulation and Refinement Screening

Step 3b: Additional Problem Formulation

Step 4: Study Design and Data Quality Objectives Process

Step 5: Field Verification of Sampling Design

Step 6: Site Investigation and Data Analysis

Step 7: Risk Characterization

Step 8: Risk Management

In conjunction with these steps, the ERAGS process also requires interim decisions and deliverables following several steps in the process. These scientific/management decision points (SMDPs) are defined as points in the process at which risk managers evaluate the work completed to a given step and either approve the work and the planned approach or redirect additional work (i.e., decide whether or not the ERA should continue to the next step in the process). Up to six SMDPs potentially may be incorporated into the eight-step ERAGS process, depending on the number of ERA steps required at a particular site and circumstances specific to the site. SMDPs typically occur after Steps 2, 3, 4, and 7 of the ERAGS process, with a possible SMDP within Step 3 and another after Step 5 if approval is required for needed changes to the sampling design. This ERA concludes with SMDP 1.

## 4.2 SCREENING-LEVEL ECOLOGICAL RISK ASSESSMENT (SLERA)

The purpose of the SLERA is to provide an initial screening to eliminate detected chemicals that are expected to pose essentially no risk to ecological receptors. The ERA consists of two phases, the SLERA followed by the Baseline ERA. In the SLERA, preliminary COPECs are identified from among the analytes detected in exposure media at the site. The SLERA is intended to address the overall protection of the habitats and associated species within the study area based on comparison of maximum detected concentrations in site media to conservative ecological screening values (ESVs). ESVs are chemical-specific media concentrations intended to be protective of a range of sensitive ecological receptors.

The SLERA serves to focus the ERA on preliminary COPECs that may have the potential to pose ecological risk so that those contaminants then may be evaluated more closely in the context of current and future conditions. The SLERA is designed to be a very conservative, screening-level evaluation so that if the assessment indicates there is no ecological risk there can be a high degree of certainty associated with that conclusion. The SLERA includes Steps 1 and 2 of the ERA process, which are described below. At the conclusion of these initial steps, a decision is made at SMDP 1 about whether additional ecological assessment is warranted to address possible ecological concerns identified by the SLERA.

### 4.2.1 Step 1: Initial Problem Formulation and Effects Evaluation

The initial Problem Formulation step of the SLERA includes the evaluation and aggregation of the data collected at the site, and the identification of conservative ESVs for use in the risk calculation in Step 2.

#### 4.2.1.1 Data Evaluation and Aggregation

As described in Section 3, site data were evaluated to determine their usability and applicability for the ERA. The potential exposure medium at the site through which ecological receptors potentially could be exposed to site-related contaminants is surface soil. This is the medium for which conservative screening values were identified to be protective of ecological receptors. There are no water bodies supporting aquatic receptors on the Site or in the vicinity; thus, exposure of ecological receptors to groundwater as a result of discharge to surface water is not expected, and groundwater is not evaluated as part of this SLERA.

#### 4.2.1.2 Identification of ESVs

Surface soil is the medium through which ecological receptors potentially may be exposed to site-related contaminants. The preferred source for soil ESVs to be used in the SLERA screening was the latest version of the *Region 4 Ecological Risk Assessment Supplemental Guidance* (USEPA, March 2018b). Eleven VOCs were detected among the surface soil samples collected on the Site (**Table 20**). A soil ESV was not available for three of these compounds (4-methyl-2-pentanone, cyclohexane, and methylcyclohexane), so ESVs for surrogate compounds were used. The ketone 2-hexanone has the lowest ESV of the ketones with screening values in Table 3 of USEPA (March 2018b), and its ESV is expected to provide a reasonably conservative surrogate for 4-methyl-2-pentanone. Two six-carbon hydrocarbon compounds with screening values in Table 3 of USEPA (March 2018b), the aliphatic hexane and the aromatic benzene, were considered as potential surrogates for cyclohexane and methylcyclohexane. The lower of the ESVs for these two potential surrogate compounds, the ESV for

hexane, was selected to provide a reasonably conservative surrogate for cyclohexane and methylcyclohexane.

#### 4.2.2 Step 2: Exposure Estimation and Risk Calculation

The second step of the SLERA includes an estimation of the potential for exposure of ecological receptors to site-related contaminants, including description of the ecological setting and development of a preliminary ecological CSM. To ensure that possible contributors to risk are not overlooked, the preliminary COPEC screening (risk calculation) is based on consistently conservative assumptions regarding exposure, in accordance with USEPA guidance (USEPA, June 1997). For example, the concentrations used in screening are the maximum detected concentrations in a given medium, the receptors assumed to be exposed are organisms with the greatest potential for contact with the exposure medium, and the detected concentrations of chemicals are assumed to be completely bioavailable.

##### 4.2.2.1 Ecological Setting

###### Community Description

The ecological community at OMS #28 consists of a forested area with a canopy of mainly oak trees as well as smaller trees, shrubs, grasses, and forbs in the understory. This undeveloped area is in the northern and western portion of the Site and is surrounded by a railway and highways to the north and west, residential parcels to the north and northeast, and the pavement and buildings of the OMS #28 area to the east and southeast. The diversity of vegetation and habitats in this terrestrial community is limited, and the community is fragmented and separated from other, larger habitat areas. As a result, this area likely provides habitat for a limited fauna of wildlife species that typically are common in close proximity to development and human activity. Mammals that may occur in this community include the gray squirrel, eastern cottontail, opossum, southeastern shrew, and cotton mouse. Birds likely to utilize these habitats include the American robin, brown thrasher, mockingbird, cardinal, and Carolina wren. Reptiles that may be present include the gray rat snake, southern fence lizard, and green anole. Amphibians potentially occurring in this community include the gray frog and southern toad. There are no surface waters or aquatic communities in the vicinity of the Site.

###### Threatened and Endangered Species

Information on the potential for occurrence of federally listed endangered or threatened species in the vicinity of the Site, as well as other species that are proposed or candidates for federal listing, was requested online from the US Fish and Wildlife Service (USFWS) through the Information for Planning and Consultation (IPaC) project review system. The report provided a list of species under USFWS jurisdiction that are known or expected to occur in the region of the Site based on their ranges. Of the six species identified, two are terrestrial. Given the lack of aquatic habitats on or near the Site, only these terrestrial species potentially could occur at the Site: the eastern indigo snake (*Drymarchon corais couperi*) and the black pine snake (*Pituophis melanoleucus lodingi*), both of which have a federal listing status of threatened. Based on their habitat requirements, including the need for large tracts of undisturbed habitat, and the lack of sufficient suitable habitat on and near the Site, neither species is likely to occur at the Site. No known ecological survey has been conducted at the Brookley Aeroplex since the ecological reconnaissance conducted as part of the Former Brookley AFB RI activities in the early 2000s. No threatened or endangered species occurrences have been reported or confirmed on the

property.

#### 4.2.2.2 Ecological CSM

The ecological CSM for the site is illustrated in the EPD (**Figure 4**), which shows the potential contaminant migration and exposure pathways through which ecological receptors may be exposed to site-related contaminants. Only terrestrial ecological receptors are represented in the EPD because there are no water bodies supporting aquatic receptors (organisms that do not breathe air) on the Site or in the vicinity. Potentially complete pathways that would not result in significant exposure or warrant quantitative evaluation are identified in the diagram by an asterisk. Potentially complete exposure pathways that are considered potentially significant and to warrant evaluation in the ERA are identified in the diagram by an "X."

Terrestrial receptors potentially could be exposed to site-related contaminants in surface soil, principally through incidental ingestion while foraging or grooming. Although animal exposure pathways based on inhalation (of VOCs from soil) and dermal absorption (from skin contact with contaminated soil) may be considered potentially complete, these pathways usually are negligible contributors to chemical intakes compared to ingestion pathways and are difficult to quantify (USEPA, February 2005). Based on the soil sample intervals collected, surface soil was considered to include the interval from 0.5 to 1 foot bgs. Surface soil samples from wooded areas with ecological habitat were collected in Parcels A and F. Parcel E is covered by pavement and buildings and provides essentially no habitat for ecological receptors. Surface soil samples were not collected in Parcels B, C, D, G, or H.

Exposures to subsurface soil (1 to 6 feet bgs) as a result of burrowing in onsite areas with subsurface soil contamination may be a potentially complete pathway for a few small mammals in the wooded, northwest area of the Site. However, the potential for such exposures is minimal, and the likelihood that they could have significant ecological effects is sufficiently low that they were considered not to warrant evaluation.

Migration of contaminants from source media to exposure media at the site may involve transport mechanisms that include the uptake of chemicals from soil by plants and animals and transfer through the food chain. USEPA Region 4 does not identify the VOCs detected in soil as bioaccumulative compounds that warrant evaluation through food-chain modeling (USEPA, March 2018b). Based on the low bioaccumulation potential of the VOCs detected in soil and the small areal extent of elevated VOC concentrations in soil, food chain exposures were predicted not to be significant and were considered not to warrant quantitative evaluation.

#### 4.2.2.3 Screening-Level Risk Calculation

A concentration less than or equal to a conservative screening level generally indicates that a chemical is unlikely to pose significant risk to ecological receptors in the area sampled and does not warrant further evaluation in the ERA. If the concentration is greater than the screening level, the chemical is identified initially as a preliminary COPEC in that medium. HQs are calculated by dividing the maximum detected concentration of a chemical by an ESV for that chemical and medium:

$$\text{HQ} = \text{Concentration} / \text{ESV}$$

A chemical with an HQ greater than or equal to 1 is identified as a preliminary COPEC. When the maximum detected concentration of each VOC detected in surface soil was divided by its soil ESV, only

the HQ for PCE was greater than or equal to 1. Therefore, PCE was identified as a preliminary COPEC (**Table 20**). The ESV used in the HQ calculation for PCE was based on an estimated effects level for soil invertebrates derived by USEPA Region 4 using a water quality benchmark and an equilibrium-partitioning model.

Due to the identification of PCE as a preliminary COPEC in surface soil based on the initial conservative screening, a refinement screening was performed. This screening calculated an HQ using the maximum detected concentration and a refinement screening value derived to be protective of mammals, which are receptors of potential concern at the Site (**Table 21**). An RSV for PCE was not available for birds. Five sample locations within an area of approximately 1600 square feet (0.037 acre) in Parcel A substantially exceeded the mammalian RSV (HQs based on these samples ranged from 1,828 to 32). The other four detections of PCE in surface soil were less than the mammalian RSV.

#### 4.2.3 Ecological Risk Characterization

The magnitude of the HQs from the risk calculation indicated a discrete hot spot of contamination in surface soil within the wooded area near the northwest perimeter of OMS #28. The areal extent of the elevated concentrations (0.037 acre) is substantially smaller than the home range of a small mammal or bird, such as a shrew or songbird, which typically have home ranges of approximately 1 acre or larger. Therefore, a receptor with a home range that encompassed the hot spot area would be unlikely to be sufficiently exposed to PCE-contaminated surface soil to result in adverse effects.

The results of the risk calculation and other lines of evidence indicate that the potential for exposure and risk to ecological receptors is minimal. PCE in surface soil, the only COPEC identified at the Site, warrants identification as a COPEC due to its high concentrations within a small area of surface soil. However, the potential for significant exposures of individual receptors is limited, and even if effects on an individual receptor did occur, the population in the vicinity of OMS #28 would not be noticeably affected.

#### 4.2.4 Scientific/Management Decision Point 1

Scientific/Management Decision Point 1 follows the completion of Steps 1 and 2 of the SLERA and determines whether there is justification to continue to the next step of the ERA process. The results of the SLERA are evaluated at this point to determine whether site-related chemicals pose negligible ecological risk (thereby providing a basis for recommending no further action with regard to ecological risk at the site) or have the potential to pose significant ecological risk (thereby providing a basis for recommending continuation of the ERA, additional field study, or an interim action). The evaluation determined that the high concentrations of PCE in a small area of surface soil are unlikely to pose significant risk to ecological receptors. Further evaluation of ecological risk in a Baseline ERA is not warranted.

## 5.0 REFERENCES

- Alabama Department of Environmental Management (ADEM), September 2010. E-mail from Colin Mitchell (Environmental Engineering Specialist, ADEM Hazardous Waste Branch) to Glenn Elliott (National Guard Bureau, CC Program Manager), notice to proceed with CERCLA track at OMS-28, September 9.
- AECOM, January 2016. Uniform Federal Policy – Quality Assurance Project Plan. Alabama Army National Guard, Organizational Maintenance Shop #28, Mobile, Alabama.
- AECOM, January 2018. Uniform Federal Policy – Quality Assurance Project Plan Addendum. Alabama Army National Guard, Organizational Maintenance Shop #28, Mobile, Alabama.
- AECOM, January 2019. Supplemental Data Gap Investigation and Groundwater Monitoring Report.
- Aerostar, March 2011. Alabama Risk-Based Corrective Action Report, Organizational Maintenance Shop – 28.
- Leidos, 2014. Feasibility Study for the Alabama Army National Guard (ALARNG) Organizational Maintenance Shop 28 (OMS-28) 1622 South Broad Street Mobile, Mobile County, Alabama, Groundwater Incident Number GW 07-01-02.
- Louis Berger, August 2015. Alabama Army National Guard (ALARNG), 1622 South Broad Street, Mobile, Mobile County, Alabama, Historical Research Study Report, Organizational Maintenance Shop (OMS) #28.
- Science Applications International Corporation (SAIC), May 2013. Remedial Investigation Report for the Alabama Army National Guard Organizational Maintenance Shop 28, Revision 2, Mobile Alabama.
- Singh, A. and R. Maichle. 2013. ProUCL Version 5.1.002 User Guide, Statistical Software for Environmental Applications for Data Sets with and without Nondetect Observations. Office of Research and Development, USEPA, Washington, DC.
- United States Environmental Protection Agency (USEPA), December 1989. Risk Assessment Guidance for Superfund: Volume 1 – Human Health Evaluation Manual (Part A). Interim Final, Publication EPA/540/1-89/002.
- USEPA, June 1997, Ecological Risk Assessment Guidance for Superfund: Process for Designing and Conducting Ecological Risk Assessments, Interim Final. Environmental Response Team, Edison, NJ.
- USEPA, April 1998, Guidelines for Ecological Risk Assessment. USEPA/630/R-95/002F, Risk Assessment Forum, Washington, DC.
- USEPA, June 2001, The Role of Screening-Level Risk Assessments and Refining Contaminants of Concern in Baseline Ecological Risk Assessments, Eco Update, Intermittent Bulletin. Publication 9345.0-14, USEPA/540/F-01/014, Office of Solid Waste and Emergency Response, Washington, District of Columbia.
- USEPA, November 2001. Supplemental Guidance to RAGS: Region 4 Bulletins - Ecological Risk Assessment, Draft. USEPA Region 4, Waste Management Division, Office of Technical Services, Atlanta, Georgia.
- USEPA, December 2001. Risk Assessment Guidance for Superfund: Volume I, Human Health Evaluation Manual (Part D, Standardized Planning, Reporting, and Review of Superfund Risk Assessments), Final, Publication 9285.7-47.



- USEPA, December 2003. Human Health Toxicity Values in Superfund Risk Assessments Memorandum, OSWER Directive 9285.7-53, Office of Solid Waste and Emergency Response, Washington, District of Columbia. December.
- USEPA, July 2004. Risk Assessment Guidance for Superfund, Volume I: Human Health Evaluation Manual (Part E, Supplemental Guidance, Dermal Risk Assessment) Interim Guidance, EPA/540/R/99/005, OSWER 9285.7-02EP, Washington, D.C.
- USEPA, February 2005. Ecological Soil Screening Levels for Antimony, Interim Final. OSWER Directive 9285.7-61. Office of Solid Waste and Emergency Response, Washington, DC. Accessible at <http://www.epa.gov/chemical-research/interim-ecological-soil-screening-level-documents>.
- USEPA, March 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. EPA/630/R-03/003F.
- USEPA, January 2009. Risk Assessment Guidance for Superfund, Volume I: Human Health Evaluation Manual (Part F, Supplemental Guidance for Inhalation Risk Assessment), Final, EPA-540-R-070-002.
- USEPA, May 2011. Integrated Risk Information System, Glossary of Terms, Accessible at [http://www.epa.gov/iris/help\\_gloss.htm](http://www.epa.gov/iris/help_gloss.htm) (last updated May 2, 2011).
- USEPA, February 2014. Determining Groundwater Exposure Point Concentrations. OSWER Directive 9283.1-42.
- USEPA, June 2015. OSWER Technical Guide for Assessing and Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air.
- USEPA, September 2017a. Documentation for EPA's Implementation of the Johnson and Ettinger Model to Evaluate Site Specific Vapor Intrusion into Buildings. Office of Superfund Remediation and Technology Innovation.
- USEPA, September 2017b. EPA Spreadsheet for Modeling Subsurface Vapor Intrusion. Available online at: <https://www.epa.gov/vaporintrusion/epa-spreadsheet-modeling-subsurface-vapor-intrusion#model>.
- USEPA, March 2018a. Region 4 Human Health Risk Assessment Supplemental Guidance, March 2018 Update, Scientific Support Section, Superfund Division, EPA Region 4, Atlanta, Georgia.
- USEPA, March 2018b. Region 4 Ecological Risk Assessment Supplemental Guidance, March 2018 Update, Scientific Support Section, Superfund Division, EPA Region 4, Atlanta, Georgia.
- USEPA, June 2018. Vapor Intrusion Screening Level Calculator. Available online at: <https://www.epa.gov/vaporintrusion/vapor-intrusion-screening-level-calculator>.
- USEPA, November 2018a. Regional Screening Levels (RSLs) Summary Table. Available online at: <https://www.epa.gov/risk/regional-screening-levels-rsls-generic-tables>. Office of Solid Waste and Emergency Response, Washington, District of Columbia.
- USEPA, November 2018b. Regional Screening Levels (RSLs) -- User's Guide (November 2018). Available online at: <https://www.epa.gov/risk/regional-screening-levels-rsls-users-guide>.
- Virginia Department of Environmental Quality (VDEQ), 2015, Voluntary Remediation Program – Risk Assessment Guidance. [http://www.deq.virginia.gov/Programs/Land\\_ProtectionRevitalization/RemediationProgram/VoluntaryRemediationProgram/RPRiskAssessmentGuidance/Guidance.aspxTables](http://www.deq.virginia.gov/Programs/Land_ProtectionRevitalization/RemediationProgram/VoluntaryRemediationProgram/RPRiskAssessmentGuidance/Guidance.aspxTables)

**TABLES**

**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Soil</b>						
A	OMS-28-SB24-1	05/10/17	0.5 - 1	X		
A	OMS-28-SB24-3	05/10/17	2.5 - 3	X		
A	OMS-28-SB24-5	05/10/17	4.5 - 5	X		
A	OMS-28-SB25-1	05/12/17	0.5 - 1			X
A	OMS-28-SB25-3	05/12/17	2.5 - 3			X
A	OMS-28-SB25-5	05/12/17	4.5 - 5			X
A	OMS-28-SB26-1	05/12/17	0.5 - 1			X
A	OMS-28-SB26-3	05/12/17	2.5 - 3			X
A	OMS-28-SB26-5	05/12/17	4.5 - 5			X
A	OMS-28-SB27-1	05/12/17	0.5 - 1			X
A	OMS-28-SB27-3	05/12/17	2.5 - 3			X
A	OMS-28-SB27-5	05/12/17	4.5 - 5			X
A	OMS-28-SB28-1	05/16/17	0.5 - 1			X
A	OMS-28-SB28-3	05/16/17	2.5 - 3			X
A	OMS-28-SB28-5	05/16/17	4.5 - 5			X
A	OMS-28-SB29-1	05/16/17	0.5 - 1			X
A	OMS-28-SB29-3	05/16/17	2.5 - 3			X
A	OMS-28-SB29-5	05/16/17	4.5 - 5			X
A	OMS-28-SB30-1	05/16/17	0.5 - 1			X
A	OMS-28-SB30-3	05/16/17	2.5 - 3			X
A	OMS-28-SB30-5	05/16/17	4.5 - 5			X
A	OMS-28-SB31-1	05/16/17	0.5 - 1			X
A	OMS-28-SB31-3	05/16/17	2.5 - 3			X
A	OMS-28-SB31-5	05/16/17	4.5 - 5			X
E	OMS-28-SB02-1	05/08/17	0.5 - 1			X
E	OMS-28-SB02-3	05/08/17	2.5 - 3			X
E	OMS-28-SB02-5	05/08/17	4.5 - 5			X
E	OMS-28-SB03-1	05/08/17	0.5 - 1			X
E	OMS-28-SB03-3	05/08/17	2.5 - 3			X
E	OMS-28-SB03-5	05/08/17	4.5 - 5			X
E	OMS-28-SB04-1	05/08/17	0.5 - 1	X		
E	OMS-28-SB04-2	05/08/17	1.5 - 2			X
E	OMS-28-SB04-5	05/08/17	4.5 - 5			X
E	OMS-28-SB05-1	05/08/17	0.5 - 1			X
E	OMS-28-SB05-2	05/08/17	1.5 - 2			X
E	OMS-28-SB05-5	05/08/17	4.5 - 5			X
E	OMS-28-SB06-1	05/08/17	0.5 - 1			X
E	OMS-28-SB06-3	05/08/17	2.5 - 3			X
E	OMS-28-SB06-6	05/08/17	5.5 - 6			X
E	OMS-28-SB07-1	05/08/17	0.5 - 1			X
E	OMS-28-SB07-3	05/08/17	2.5 - 3			X
E	OMS-28-SB07-6	05/08/17	5.5 - 6			X
E	OMS-28-SB08-1	05/08/17	0.5 - 1			X
E	OMS-28-SB08-3	05/08/17	2.5 - 3			X
E	OMS-28-SB08-6	05/08/17	5.5 - 6			X
E	OMS-28-SB09-1	05/08/17	0.5 - 1			X
E	OMS-28-SB09-2	05/08/17	1.5 - 2			X
E	OMS-28-SB09-3	05/08/17	2.5 - 3			X

**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Soil (Continued)</b>						
E	OMS-28-SB11-1	05/08/17	0.5 - 1			X
E	OMS-28-SB11-4	05/08/17	3.5 - 4			X
E	OMS-28-SB11-6	05/08/17	5.5 - 6	X		
F	OMS-28-SB01-1	05/08/17	0.5 - 1			X
F	OMS-28-SB01-2	05/08/17	1.5 - 2	X		
F	OMS-28-SB01-3	05/08/17	2.5 - 3			X
F	OMS-28-SB10-1	05/08/17	0.5 - 1			X
F	OMS-28-SB10-2	05/08/17	1.5 - 2			X
F	OMS-28-SB10-3	05/08/17	2.5 - 3			X
F	OMS-28-SB12-1	05/08/17	0.5 - 1			X
F	OMS-28-SB12-3	05/08/17	2.5 - 3			X
F	OMS-28-SB12-6	05/08/17	5.5 - 6			X
F	OMS-28-SB13-1	05/08/17	0.5 - 1			X
F	OMS-28-SB13-3	05/08/17	2.5 - 3			X
F	OMS-28-SB13-5	05/08/17	4.5 - 5			X
F	OMS-28-SB14-1	05/08/17	0.5 - 1	X		
F	OMS-28-SB14-3	05/08/17	2.5 - 3			X
F	OMS-28-SB14-5	05/08/17	4.5 - 5			X
F	OMS-28-SB15-1	05/08/17	0.5 - 1			X
F	OMS-28-SB15-3	05/08/17	2.5 - 3			X
F	OMS-28-SB15-5	05/08/17	4.5 - 5			X
F	OMS-28-SB16-1	05/10/17	0.5 - 1			X
F	OMS-28-SB16-2.5	05/10/17	2 - 2.5			X
F	OMS-28-SB16-5	05/10/17	3.5 - 4	X		
F	OMS-28-SB17-1	05/10/17	0.5 - 1			X
F	OMS-28-SB17-2.5	05/10/17	2 - 2.5			X
F	OMS-28-SB17-5	05/10/17	4.5 - 5			X
F	OMS-28-SB18-1	05/10/17	0.5 - 1			X
F	OMS-28-SB18-2.5	05/10/17	2 - 2.5			X
F	OMS-28-SB18-5	05/10/17	4.5 - 5			X
F	OMS-28-SB19-1	05/10/17	0.5 - 1			X
F	OMS-28-SB19-2.5	05/10/17	2 - 2.5			X
F	OMS-28-SB19-5	05/10/17	4.5 - 5			X
F	OMS-28-SB20-1	05/10/17	0.5 - 1			X
F	OMS-28-SB20-1.5	05/10/17	1 - 1.5			X
F	OMS-28-SB20-2	05/10/17	1.5 - 2			X
F	OMS-28-SB21-1	05/10/17	0.5 - 1			X
F	OMS-28-SB21-1.5	05/10/17	1 - 1.5			X
F	OMS-28-SB21-2	05/10/17	1.5 - 2			X
F	OMS-28-SB22-1	05/10/17	0.5 - 1			X
F	OMS-28-SB22-1.5	05/10/17	1.5 - 2	X		
F	OMS-28-SB22-2	05/10/17	1.5 - 2			X
F	OMS-28-SB23-1	05/10/17	0.5 - 1			X
F	OMS-28-SB23-1.5	05/10/17	1 - 1.5			X
F	OMS-28-SB23-2	05/10/17	1.5 - 2			X

**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater</b>						
A	OMS-28-GW19-12	05/09/17	8 - 12			X
A	OMS-28-GW19-19	05/09/17	15 - 19			X
A	OMS-28-GW19-30	05/09/17	26 - 30			X
A	OMS-28-GW22-11	05/09/17	7 - 11			X
A	OMS-28-GW22-20	05/09/17	16 - 20			X
A	OMS-28-GW22-28	05/09/17	24 - 28			X
A	OMS-28-GW23-12	05/10/17	8 - 12	X		X <sup>(5)</sup>
A	OMS-28-GW23-20	05/10/17	16 - 20			X
A	OMS-28-GW23-28	05/10/17	24 - 28			X
A	OMS-28-GW24-12	05/12/17	8 - 12			X
A	OMS-28-GW24-19	05/09/17	15 - 19			X
A	OMS-28-GW24-30	05/09/17	26 - 30			X
A	OMS-28-GW25-12	05/16/17	8 - 12			X
A	OMS-28-GW25-19	05/09/17	15 - 19			X
A	OMS-28-GW25-28	05/09/17	24 - 28			X
A	OMS-28-GW39-13	05/10/17	9 - 13			X
A	OMS-28-GW39-20	05/10/17	16 - 20			X
A	OMS-28-GW39-28	05/10/17	24 - 28			X
A	OMS-28-GW40-13	05/11/17	9 - 13			X
A	OMS-28-GW40-20	05/11/17	16 - 20			X
A	OMS-28-GW40-28	05/11/17	24 - 28			X
A	OMS-28-GW41-12	05/11/17	8 - 12			X
A	OMS-28-GW41-20	05/11/17	16 - 20	X		X <sup>(5)</sup>
A	OMS-28-GW41-28	05/11/17	24 - 28			X
B	OMS-28-GW42-12	05/10/17	8 - 12			X
B	OMS-28-GW42-20	05/10/17	16 - 20			X
B	OMS-28-GW42-28	05/10/17	24 - 28			X
B	OMS-28-GW43-12	05/12/17	8 - 12			X
B	OMS-28-GW43-20	05/12/17	16 - 20			X
B	OMS-28-GW43-28	05/12/17	24 - 28			X
B	OMS-28-GW45-18	05/12/17	14 - 18			X
B	OMS-28-GW45-32	05/12/17	28 - 32			X
B	OMS-28-GW57-12	05/17/17	8 - 12			X
B	OMS-28-GW57-16	05/12/17	12 - 16	X		X <sup>(5)</sup>
B	OMS-28-GW57-33	05/12/17	29 - 33			X
C	OMS-28-2_050517 *	05/05/17	10 - 20	X		
C	OMS-28-2-011916 *	01/19/16	10 - 20	X		
C	OMS-28-GW44-28	05/16/17	24 - 28			X
C	OMS-28-GW60-16	05/16/17	12 - 16			X
C	OMS-28-GW60-33	05/16/17	29 - 33			X
D	OMS-28-GW46-16	05/12/17	12 - 16			X
D	OMS-28-GW46-33	05/12/17	29 - 33			X
D	OMS-28-GW64-16	05/17/17	12 - 16			X
D	OMS-28-GW64-33	05/17/17	29 - 33			X
D	OMS-28-GW72-33	05/19/17	29 - 33			X
D	OMS-28-GW73-16	01/29/18	12 - 16		X	
D	OMS-28-GW73-33	01/29/18	29 - 33		X	

**Table 1a  
Summary of Sample Locations and Analyses  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater (Continued)</b>						
D	OMS-28-GW74-15	01/30/18	11 - 15		X	
D	OMS-28-GW74-33	01/30/18	29 - 33		X	
D	OMS-28-GW75-29	01/30/18	25 - 29		X	
D	OMS-28-GW90-33	02/05/18	29 - 33		X	
D	OMS-28-GW91-33	02/06/18	29 - 33		X	
D	OMS-28-GW92-12	02/06/18	8 - 12		X	
D	OMS-28-GW92-16	02/06/18	12 - 16		X	
D	OMS-28-GW92-33	02/06/18	29 - 33		X	
D	OMS-28-GW93-12	02/06/18	8 - 12		X	
D	OMS-28-GW93-16	02/06/18	12 - 16		X	
D	OMS-28-GW93-33	02/06/18	29 - 33		X	
E	MW-5_050517 *	05/01/17	3.3 - 13.3	X		
E	MW-5-012016 *	01/20/16	3.3 - 13.3	X		
E	MW-6_050517 *	05/01/17	2.3 - 12.3	X		
E	MW-6-012016 *	01/20/16	2.3 - 12.3	X		
E	MW-8_050517 *	05/01/17	4.8 - 14.8	X		
E	MW-8-012216 *	01/22/16	4.8 - 14.8	X		
E	OMS-28-7_050517 *	05/01/17	10 - 20	X		
E	OMS-28-7-012016 *	01/20/16	10 - 20	X		
E	OMS-28-GW01-10	05/02/17	6 - 10			X
E	OMS-28-GW01-19	05/02/17	15 - 19			X
E	OMS-28-GW01-32	05/02/17	28 - 32			X
E	OMS-28-GW05-11	05/02/17	7 - 11			X
E	OMS-28-GW05-19	05/02/17	15 - 19			X
E	OMS-28-GW05-33	05/02/17	29 - 33			X
E	OMS-28-GW30-11	05/04/17	6 - 11			X
E	OMS-28-GW30-20	05/04/17	16 - 20			X
E	OMS-28-GW30-33	05/04/17	29 - 33			X
E	OMS-28-GW31-12	05/02/17	8 - 12			X
E	OMS-28-GW31-19	05/02/17	15 - 19			X
E	OMS-28-GW31-31	05/02/17	27 - 31			X
E	OMS-28-GW32-12	05/02/17	8 - 12	X		X <sup>(5)</sup>
E	OMS-28-GW32-19	05/02/17	15 - 19			X
E	OMS-28-GW32-31	05/02/17	27 - 31			X
E	OMS-28-GW33-12	05/02/17	8 - 12			X
E	OMS-28-GW33-19	05/02/17	15 - 19			X
E	OMS-28-GW33-33	05/02/17	29 - 33			X
E	OMS-28-GW52-19	05/15/17	15 - 19			X
E	OMS-28-GW52-31	05/13/17	27 - 31			X
E	OMS-28-GW53-12	05/13/17	8 - 12			X
E	OMS-28-GW53-19	05/13/17	15 - 19			X
E	OMS-28-GW53-31	05/13/17	27 - 31			X
E	OMS-28-GW56-18	05/15/17	14 - 18			X
E	OMS-28-GW56-31	05/15/17	27 - 31			X
E	OMS-28-GW58-12	05/15/17	8 - 12			X
E	OMS-28-GW58-19	05/15/17	15 - 19			X
E	OMS-28-GW58-31	05/15/17	27 - 31	X		X <sup>(5)</sup>

**Table 1a  
Summary of Sample Locations and Analyses  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater (Continued)</b>						
E	OMS-28-GW62-12	05/16/17	8 - 12			X
E	OMS-28-GW62-19	05/16/17	15 - 19	X		X <sup>(5)</sup>
E	OMS-28-GW62-30	05/16/17	26 - 30			X
E	OMS-28-GW66-26	05/18/17	22 - 26			X
E	OMS-28-GW66-49	05/18/17	45 - 49			X
E	OMS-28-GW67-26	05/18/17	22 - 26			X
E	OMS-28-GW67-52	05/18/17	48 - 52			X
E	OMS-28-GW68-26	05/18/17	22 - 26			X
E	OMS-28-GW68-57	05/18/17	53 - 57			X
E	OMS-28-GW69-26	05/18/17	22 - 26			X
E	OMS-28-GW69-49	05/19/17	45 - 49			X
E	OMS-28-GW81-18	01/30/18	14 - 18		X	
E	OMS-28-GW81-28	01/31/18	24 - 28		X	
E	OMS-28-GW82-19	02/02/18	15 - 19		X	
E	OMS-28-GW82-31	02/02/18	27 - 31		X	
E	OMS-28-GW83-12	02/02/18	8 - 12		X	
E	OMS-28-GW83-16	02/02/18	12 - 16		X	
E	OMS-28-GW83-31	02/02/18	27 - 31		X	
E	OMS-28-GW84-12	02/05/18	8 - 12		X	
E	OMS-28-GW84-17	02/05/18	13 - 17		X	
E	OMS-28-GW84-31	02/05/18	27 - 31		X	
E	OMS-28-GW85-13	02/02/18	9 - 13		X	
E	OMS-28-GW85-19	02/02/18	15 - 19		X	
E	OMS-28-GW85-31	02/02/18	27 - 31		X	
E	OMS-28-GW86-12	02/03/18	8 - 12		X	
E	OMS-28-GW86-16	02/03/18	12 - 16		X	
E	OMS-28-GW86-31	02/03/18	27 - 31		X	
E	OMS-28-GW87-31	02/03/18	27 - 31		X	
E	OMS-28-GW88-12	02/05/18	8 - 12		X	
E	OMS-28-GW88-17	02/05/18	13 - 17		X	
E	OMS-28-GW88-31	02/05/18	27 - 31		X	
E	OMS-28-GW89-31	01/30/18	27 - 31		X	
F	MW-9_050517	05/05/17	7.4 - 17.4	X		
F	MW-9-012016	01/20/16	7.4 - 17.4	X		
F	OMS-28-3_050517 *	05/01/17	10 - 20	X		
F	OMS-28-3-012116 *	01/21/16	10 - 20	X		
F	OMS-28-4_050517 *	05/05/17	66 - 76	X		
F	OMS-28-4-012016 *	01/20/16	66 - 76	X		
F	OMS-28-5_050517 *	05/05/17	10 - 20	X		
F	OMS-28-5-012016 *	01/20/16	10 - 20	X		
F	OMS-28-GW02-12	05/03/17	8 - 12			X
F	OMS-28-GW02-19	05/03/17	15 - 19	X		X <sup>(5)</sup>
F	OMS-28-GW02-31	05/03/17	27 - 31			X
F	OMS-28-GW03-12	05/04/17	8 - 12			X
F	OMS-28-GW03-20	05/04/17	16 - 20			X
F	OMS-28-GW03-34	05/04/17	29 - 34	X		X <sup>(5)</sup>
F	OMS-28-GW04-10	05/03/17	6 - 10			X

**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater (Continued)</b>						
F	OMS-28-GW04-17	05/03/17	13 - 17			X
F	OMS-28-GW04-31	05/03/17	27 - 31			X
F	OMS-28-GW06-11	05/17/17	7 - 11	X		X <sup>(5)</sup>
F	OMS-28-GW06-17	05/17/17	13 - 17			X
F	OMS-28-GW06-32	05/17/17	28 - 32			X
F	OMS-28-GW07-11	05/19/17	7 - 11			X
F	OMS-28-GW07-18	05/19/17	14 - 18			X
F	OMS-28-GW07-31	05/19/17	27 - 31			X
F	OMS-28-GW08-10	05/03/17	6 - 10			X
F	OMS-28-GW08-17	05/03/17	13 - 17			X
F	OMS-28-GW08-31	05/03/17	27 - 31			X
F	OMS-28-GW09-10	05/03/17	6 - 10			X
F	OMS-28-GW09-16	05/03/17	6 - 10			X
F	OMS-28-GW09-33	05/03/17	29 - 33			X
F	OMS-28-GW10-10	05/09/17	6 - 10			X
F	OMS-28-GW10-16	05/09/17	12 - 16			X
F	OMS-28-GW10-33	05/09/17	29 - 33			X
F	OMS-28-GW11-11	05/13/17	7 - 11	X		X <sup>(5)</sup>
F	OMS-28-GW11-19	05/13/17	15 - 19			X
F	OMS-28-GW11-30	05/13/17	26 - 30			X
F	OMS-28-GW12-12	05/19/17	8 - 12	X		X <sup>(5)</sup>
F	OMS-28-GW12-18	05/19/17	14 - 18			X
F	OMS-28-GW12-32	05/19/17	28 - 32			X
F	OMS-28-GW13-12	05/09/17	8 - 12			X
F	OMS-28-GW13-18	05/09/17	14 - 18			X
F	OMS-28-GW13-32	05/09/17	29 - 32	X		X <sup>(5)</sup>
F	OMS-28-GW14-11	05/13/17	7 - 11			X
F	OMS-28-GW14-20	05/13/17	16 - 20			X
F	OMS-28-GW14-30	05/13/17	26 - 30			X
F	OMS-28-GW15-12	05/05/17	8 - 12			X
F	OMS-28-GW15-19	05/05/17	15 - 19			X
F	OMS-28-GW15-30	05/05/17	26 - 30			X
F	OMS-28-GW16-12	05/04/17	8 - 12			X
F	OMS-28-GW16-19	05/04/17	15 - 19			X
F	OMS-28-GW16-30	05/04/17	26 - 30			X
F	OMS-28-GW17-12	05/04/17	8 - 12			X
F	OMS-28-GW17-19	05/04/17	15 - 19			X
F	OMS-28-GW17-28	05/04/17	24 - 28			X
F	OMS-28-GW18-12	05/05/17	8 - 12			X
F	OMS-28-GW18-18	05/05/17	14 - 18	X		X <sup>(5)</sup>
F	OMS-28-GW18-30	05/05/17	26 - 30			X
F	OMS-28-GW20-12	05/05/17	8 - 12	X		X <sup>(5)</sup>
F	OMS-28-GW20-19	05/04/17	15 - 19			X
F	OMS-28-GW20-28	05/04/17	24 - 28			X
F	OMS-28-GW21-12	05/05/17	8 - 12			X
F	OMS-28-GW21-18	05/05/17	14 - 18			X
F	OMS-28-GW21-30	05/05/17	26 - 30			X



**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater (Continued)</b>						
F	OMS-28-GW26-31	05/09/17	27 - 31			X
F	OMS-28-GW34-19	05/17/17	15 - 19			X
F	OMS-28-GW34-31	05/17/17	27 - 31	X		X <sup>(5)</sup>
F	OMS-28-GW36-12	05/11/17	8 - 12			X
F	OMS-28-GW36-18	05/11/17	14 - 18			X
F	OMS-28-GW36-29	05/11/17	25 - 29			X
F	OMS-28-GW37-12	05/11/17	8 - 12			X
F	OMS-28-GW37-19	05/11/17	15 - 19			X
F	OMS-28-GW37-28	05/11/17	24 - 28			X
F	OMS-28-GW38-12	05/11/17	8 - 12			X
F	OMS-28-GW38-18	05/11/17	14 - 18			X
F	OMS-28-GW38-30	05/11/17	26 - 30	X		X <sup>(5)</sup>
F	OMS-28-GW47-19	05/17/17	15 - 19			X
F	OMS-28-GW47-32	05/17/17	28 - 32			X
F	OMS-28-GW49-12	05/15/17	8 - 12	X		X <sup>(5)</sup>
F	OMS-28-GW49-18	05/15/17	14 - 18			X
F	OMS-28-GW49-30	05/15/17	26 - 30			X
F	OMS-28-GW50-13	05/15/17	9 - 13			X
F	OMS-28-GW50-18	05/15/17	14 - 18			X
F	OMS-28-GW50-30	05/15/17	26 - 30			X
F	OMS-28-GW51-30	05/13/17	26 - 30			X
F	OMS-28-GW54-12	05/13/17	8 - 12			X
F	OMS-28-GW54-19	05/13/17	15 - 19			X
F	OMS-28-GW54-32	05/13/17	28 - 32			X
F	OMS-28-GW55-12	05/13/17	8 - 12			X
F	OMS-28-GW55-19	05/13/17	15 - 19			X
F	OMS-28-GW55-32	05/13/17	28 - 32			X
F	OMS-28-GW59-10	05/16/17	8 - 12			X
F	OMS-28-GW59-18	05/16/17	14 - 18			X
F	OMS-28-GW59-30	05/16/17	26 - 30			X
F	OMS-28-GW61-12	05/17/17	8 - 12			X
F	OMS-28-GW61-19	05/17/17	15 - 19			X
F	OMS-28-GW61-31	05/17/17	27 - 31			X
F	OMS-28-GW63-12	05/17/17	8 - 12			X
F	OMS-28-GW63-19	05/17/17	15 - 19			X
F	OMS-28-GW63-30	05/17/17	26 - 30			X
F	OMS-28-GW65-12	05/17/17	8 - 12			X
F	OMS-28-GW65-19	05/17/17	15 - 19			X
F	OMS-28-GW65-29	05/17/17	25 - 29			X
F	OMS-28-GW71-19	05/19/17	15 - 19			X
F	OMS-28-GW71-30	05/19/17	29 - 33			X
G	MW-12_050517 *	05/01/17	5.6 - 15.6	X		
G	MW-12-012116 *	01/21/16	5.6 - 15.6	X		
G	OMS-28-1_050517 *	05/01/17	70 - 80	X		
G	OMS-28-1-012116 *	01/21/16	70 - 80	X		
G	OMS-28-GW76-13	01/31/18	9 - 13		X	
G	OMS-28-GW76-20	01/31/18	16 - 20		X	

**Table 1a**  
**Summary of Sample Locations and Analyses**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel <sup>(1)</sup>	Sample ID <sup>(1)</sup>	Date Collected	Depth <sup>(2)</sup> (feet bgs)	VOCs (8260)	VOCs <sup>(3)</sup> (8260)	VOCs <sup>(4)</sup> (8260)
<b>Groundwater (Continued)</b>						
G	OMS-28-GW76-28	01/31/18	24 - 28		X	
G	OMS-28-GW77-12	02/01/18	8 - 12		X	
G	OMS-28-GW77-20	02/01/18	16 - 20		X	
G	OMS-28-GW77-27	02/02/18	23 - 27		X	
G	OMS-28-GW78-12	01/31/18	8 - 12		X	
G	OMS-28-GW78-20	01/31/18	16 - 20		X	
G	OMS-28-GW78-27	02/01/18	23 - 27		X	
G	OMS-28-GW79-11	02/01/18	7 - 11		X	
G	OMS-28-GW79-17	02/01/18	13 - 17		X	
G	OMS-28-GW79-27	02/01/18	23 - 27		X	
G	OMS-28-GW80-11	02/01/18	7 - 11		X	
G	OMS-28-GW80-17	02/02/18	13 - 17		X	
G	OMS-28-GW80-27	02/02/18	23 - 27		X	

**Notes:**

- (1) - See Figure 3 for locations of parcels and samples.  
 \* - Indicates sample was collected from a monitoring well. Other samples were grab samples.
- (2) - Surface soils were collected from 0.5 to 1 foot.  
 Subsurface soils were collected from 1 to 6 feet.  
 Groundwater depths shown are the screened interval.
- (3) - Analyzed only for cis-1,2-dichloroethene, tetrachloroethene, trichloroethene, and vinyl chloride by on-site mobile laboratory.
- (4) - Analyzed only for tetrachloroethene and trichloroethene by on-site mobile laboratory.
- (5) - Tetrachloroethene and trichloroethene data results from off-site fixed laboratory were used instead of on-site mobile laboratory results.

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel** <sup>(1)</sup>  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel A</b>						
OMS-28-GW19-19	5/9/17	—	95.7	38.7	—	2nd highest TCE conc.
OMS-28-GW19-12	5/9/17	—	2.2	3.3	—	This deeper depth included
OMS-28-GW19-30	5/9/17	—	< 1	< 1	—	This deeper depth included
OMS-28-GW22-11	5/9/17	—	40,000	< 1	—	Highest PCE conc.
OMS-28-GW22-20	5/9/17	—	74.3	0.82	—	This deeper depth included
OMS-28-GW22-28	5/9/17	—	77	0.92	—	This deeper depth included
OMS-28-GW23-12	5/10/17	—	0.863	0.751	—	GW23 is within identified plume
OMS-28-GW23-20	5/10/17	—	< 1	< 1	—	GW23 is within identified plume
OMS-28-GW23-28	5/10/17	—	< 1	< 1	—	GW23 is within identified plume
OMS-28-GW24-19	5/9/17	—	100	35.9	—	3rd highest TCE conc.
OMS-28-GW24-12	5/12/17	—	38.1	13.5	—	This deeper depth included
OMS-28-GW24-30	5/9/17	—	1.2	< 1	—	This deeper depth included
OMS-28-GW25-12	5/16/17	—	< 1	< 1	—	Not considered within the core/center of the plume
OMS-28-GW25-19	5/9/17	—	1.4	0.8	—	Not considered within the core/center of the plume
OMS-28-GW25-28	5/9/17	—	< 1	0.89	—	Not considered within the core/center of the plume
OMS-28-GW39-13	5/10/17	—	1000	15	—	4th highest PCE conc.
OMS-28-GW39-20	5/10/17	—	120	5.9	—	This deeper depth included
OMS-28-GW39-28	5/10/17	—	< 1	< 1	—	This deeper depth included
OMS-28-GW40-13	5/11/17	—	1800	35	—	2nd highest PCE; 4th highest TCE conc.
OMS-28-GW40-20	5/11/17	—	1500	46	—	3rd highest PCE; highest TCE conc.
OMS-28-GW40-28	5/11/17	—	< 1	< 1	—	This deeper depth included
OMS-28-GW41-12	5/11/17	—	31.5	6.5	—	Not considered within the core/center of the plume
OMS-28-GW41-20	5/11/17	—	< 0.5	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW41-28	5/11/17	—	< 1	< 1	—	Not considered within the core/center of the plume
<b>Parcel B</b>						
OMS-28-GW42-12	5/10/17	—	—	1.7	—	Not considered within the core/center of the plume
OMS-28-GW42-20	5/10/17	—	—	1.8	—	Not considered within the core/center of the plume
OMS-28-GW42-28	5/10/17	—	—	< 1	—	Not considered within the core/center of the plume
OMS-28-GW43-28	5/12/17	—	—	10	—	Highest TCE conc.
OMS-28-GW43-12	5/12/17	—	—	< 1	—	This deeper depth included
OMS-28-GW43-20	5/12/17	—	—	< 1	—	This deeper depth included
OMS-28-GW45-18	5/12/17	—	—	1	—	Not considered within the core/center of the plume
OMS-28-GW45-32	5/12/17	—	—	0.62	—	Not considered within the core/center of the plume
OMS-28-GW57-12	5/17/17	—	—	< 1	—	Not considered within the core/center of the plume
OMS-28-GW57-16	5/12/17	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW57-33	5/12/17	—	—	< 1	—	Not considered within the core/center of the plume

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel <sup>(1)</sup>**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel C</b>						
OMS-28-2-011916	1/19/16	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-2_050517	5/5/17	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW44-28	5/16/17	—	—	4.43	—	Highest TCE conc.
OMS-28-GW60-16	5/16/17	—	—	< 1	—	Not considered within the core/center of the plume
OMS-28-GW60-33	5/16/17	—	—	< 1	—	Not considered within the core/center of the plume
<b>Parcel D</b>						
OMS-28-GW46-16	5/12/17	—	—	8.1	—	3rd highest TCE conc.
OMS-28-GW46-33	5/12/17	—	—	1.3	—	This deeper depth included
OMS-28-GW64-33	5/17/17	—	—	27.1	—	Highest TCE conc.
OMS-28-GW64-16	5/17/17	—	—	< 1	—	This shallower depth included
OMS-28-GW72-33	5/19/17	—	—	< 1	—	Not considered within the core/center of the plume
OMS-28-GW73-16	1/29/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW73-33	1/29/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW74-15	1/30/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW74-33	1/30/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW75-29	1/30/18	—	—	9.02	—	2nd highest TCE conc.
OMS-28-GW90-33	2/5/18	—	—	1.28	—	Not considered within the core/center of the plume
OMS-28-GW91-33	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW92-12	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW92-16	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW92-33	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW93-12	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW93-16	2/6/18	—	—	< 0.5	—	Not considered within the core/center of the plume
OMS-28-GW93-33	2/6/18	—	—	0.584	—	Not considered within the core/center of the plume

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel <sup>(1)</sup>**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel E</b>						
MW-5-012016	1/20/16	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
MW-5_050517	5/1/17	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
MW-6-012016	1/20/16	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
MW-6_050517	5/1/17	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
MW-8-012216	1/22/16	< 0.5	—	7.8	< 0.5	Not considered within the core/center of the plume
MW-8_050517	5/1/17	< 0.5	—	0.373	< 0.5	Not considered within the core/center of the plume
OMS-28-7-012016	1/20/16	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
OMS-28-7_050517	5/1/17	< 0.5	—	< 0.5	< 0.5	Not considered within the core/center of the plume
OMS-28-GW01-10	5/2/17	NA	—	82.16	NA	Not considered within the core/center of the plume
OMS-28-GW01-19	5/2/17	NA	—	38	NA	Not considered within the core/center of the plume
OMS-28-GW01-32	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW05-11	5/2/17	NA	—	16.1	NA	Not considered within the core/center of the plume
OMS-28-GW05-19	5/2/17	NA	—	3.14	NA	Not considered within the core/center of the plume
OMS-28-GW05-33	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW30-11	5/4/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW30-20	5/4/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW30-33	5/4/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW31-12	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW31-19	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW31-31	5/2/17	NA	—	13.35	NA	Not considered within the core/center of the plume
OMS-28-GW32-12	5/2/17	3.71	—	268	0.022	3rd highest cis-1,2-DCE and 2nd highest TCE conc. This deeper depth included This deeper depth included
OMS-28-GW32-19	5/2/17	NA	—	6.26	NA	
OMS-28-GW32-31	5/2/17	NA	—	15.6	NA	
OMS-28-GW33-12	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW33-19	5/2/17	NA	—	38.21	NA	Not considered within the core/center of the plume
OMS-28-GW33-33	5/2/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW52-19	5/15/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW52-31	5/13/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW53-12	5/13/17	NA	—	21.4	NA	Not considered within the core/center of the plume
OMS-28-GW53-19	5/13/17	NA	—	31.3	NA	Not considered within the core/center of the plume
OMS-28-GW53-31	5/13/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW56-18	5/15/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW56-31	5/15/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW58-12	5/15/17	NA	—	5.34	NA	Not considered within the core/center of the plume
OMS-28-GW58-19	5/15/17	NA	—	48.02	NA	Not considered within the core/center of the plume
OMS-28-GW58-31	5/15/17	< 0.5	—	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW62-12	5/16/17	NA	—	3.47	NA	Not considered within the core/center of the plume
OMS-28-GW62-19	5/16/17	3.41	—	45.1	0.008	Not considered within the core/center of the plume
OMS-28-GW62-30	5/16/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW66-26	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW66-49	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW67-26	5/18/17	NA	—	0.91	NA	Not considered within the core/center of the plume
OMS-28-GW67-52	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel <sup>(1)</sup>**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel E (Continued)</b>						
OMS-28-GW68-26	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW68-57	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW69-26	5/18/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW69-49	5/19/17	NA	—	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW81-18	1/30/18	1.29	—	11.1	< 0.05	Not considered within the core/center of the plume
OMS-28-GW81-28	1/31/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW82-19	2/2/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW82-31	2/2/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW83-12	2/2/18	< 0.5	—	3.59	< 0.05	Not considered within the core/center of the plume
OMS-28-GW83-16	2/2/18	1.28	—	51.3	< 0.05	Not considered within the core/center of the plume
OMS-28-GW83-31	2/2/18	< 0.5	—	0.644	< 0.05	Not considered within the core/center of the plume
OMS-28-GW84-12	2/5/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW84-17	2/5/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW84-31	2/5/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW85-19	2/2/18	7.56	—	291	0.028	Highest cis-1,2-DCE and TCE conc.
OMS-28-GW85-13	2/2/18	0.521	—	17.1	< 0.05	This shallower depth included
OMS-28-GW85-31	2/2/18	< 0.5	—	< 0.5	< 0.05	This deeper depth included
OMS-28-GW86-16	2/3/18	4.34	—	131	0.034	2nd highest cis-1,2-DCE, 3rd highest TCE, highest VC conc.
OMS-28-GW86-12	2/3/18	2.9	—	42.4	< 0.05	This shallower depth included
OMS-28-GW86-31	2/3/18	< 0.5	—	< 0.5	< 0.05	This deeper depth included
OMS-28-GW87-31	2/3/18	< 0.5	—	< 0.5	< 0.05	GW87 is within identified plume
OMS-28-GW88-12	2/5/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW88-17	2/5/18	< 0.5	—	< 0.5	< 0.05	Not considered within the core/center of the plume
OMS-28-GW88-31	2/5/18	< 0.5	—	0.894	< 0.05	Not considered within the core/center of the plume
OMS-28-GW89-31	1/30/18	1.03	—	5.22	< 0.05	Not considered within the core/center of the plume

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel <sup>(1)</sup>**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel F</b>						
MW-9-012016	1/20/16	< 0.5	< 0.5	< 0.5	< 0.5	Not considered within the core/center of the plume
MW-9_050517	5/5/17	< 0.5	< 0.5	< 0.5	< 0.5	Not considered within the core/center of the plume
OMS-28-3-012116	1/21/16	1.59	< 0.5	8.92	< 0.5	Not considered within the core/center of the plume
OMS-28-3_050517	5/1/17	1.26	< 0.5	9.6	< 0.5	Not considered within the core/center of the plume
OMS-28-4-012016	1/20/16	< 0.5	0.88	< 0.5	< 0.5	Not considered within the core/center of the plume
OMS-28-4_050517	5/5/17	< 0.5	< 0.5	< 0.5	< 0.5	Not considered within the core/center of the plume
OMS-28-5-012016	1/20/16	27.8	455	200	< 2.5	2nd highest cis-1,2-DCE and PCE concs.
OMS-28-5_050517	5/5/17	103	154	246	< 1	Highest cis-1,2-DCE conc.
OMS-28-GW02-12	5/3/17	NA	< 1	0.63	NA	Not considered within the core/center of the plume
OMS-28-GW02-19	5/3/17	< 0.5	< 0.5	< 0.5	0.011	Not considered within the core/center of the plume
OMS-28-GW02-31	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW03-12	5/4/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW03-20	5/4/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW03-34	5/4/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW04-10	5/3/17	NA	< 1	1.37	NA	Not considered within the core/center of the plume
OMS-28-GW04-17	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW04-31	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW06-11	5/17/17	< 0.5	< 0.5	1.07	< 0.015	Not considered within the core/center of the plume
OMS-28-GW06-17	5/17/17	NA	< 1	65.95	NA	Not considered within the core/center of the plume
OMS-28-GW06-32	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW07-11	5/19/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW07-18	5/19/17	NA	< 1	310	NA	Not considered within the core/center of the plume
OMS-28-GW07-31	5/19/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW08-10	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW08-17	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW08-31	5/3/17	NA	< 1	71.17	NA	Not considered within the core/center of the plume
OMS-28-GW09-10	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW09-16	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW09-33	5/3/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW10-10	5/9/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW10-16	5/9/17	NA	< 1	68.9	NA	Not considered within the core/center of the plume
OMS-28-GW10-33	5/9/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW11-11	5/13/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW11-19	5/13/17	NA	< 1	24.3	NA	Not considered within the core/center of the plume
OMS-28-GW11-30	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW12-12	5/19/17	< 0.5	< 0.5	< 0.5	NA	Not considered within the core/center of the plume
OMS-28-GW12-18	5/19/17	NA	< 1	23.67	NA	Not considered within the core/center of the plume
OMS-28-GW12-32	5/19/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW13-12	5/9/17	NA	< 1	1.5	NA	Not considered within the core/center of the plume
OMS-28-GW13-18	5/9/17	NA	< 1	37.2	NA	Not considered within the core/center of the plume
OMS-28-GW13-32	5/9/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW14-11	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW14-20	5/13/17	NA	< 1	3.6	NA	Not considered within the core/center of the plume
OMS-28-GW14-30	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume

**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel <sup>(1)</sup>**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel F (Continued)</b>						
OMS-28-GW15-12	5/5/17	NA	< 1	2.77	NA	Not considered within the core/center of the plume
OMS-28-GW15-19	5/5/17	NA	< 1	7.11	NA	Not considered within the core/center of the plume
OMS-28-GW15-30	5/5/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW16-12	5/4/17	NA	< 1	0.52	NA	Not considered within the core/center of the plume
OMS-28-GW16-19	5/4/17	NA	< 1	5.95	NA	Not considered within the core/center of the plume
OMS-28-GW16-30	5/4/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW17-12	5/4/17	NA	< 1	1.59	NA	Not considered within the core/center of the plume
OMS-28-GW17-19	5/4/17	NA	< 1	6.7	NA	Not considered within the core/center of the plume
OMS-28-GW17-28	5/4/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW18-18	5/5/17	2.44	< 0.5	4.42	0.18	Highest VC and 3rd highest cis-1,2-DCE conc.
OMS-28-GW18-12	5/5/17	NA	< 1	1.55	NA	This deeper depth included
OMS-28-GW18-30	5/5/17	NA	< 1	< 1	NA	This deeper depth included
OMS-28-GW20-12	5/5/17	0.927	< 25.7	32.5	0.024	2nd highest VC conc.
OMS-28-GW20-19	5/4/17	NA	< 1	< 1	NA	This deeper depth included
OMS-28-GW20-28	5/4/17	NA	< 1	< 1	NA	This deeper depth included
OMS-28-GW21-12	5/5/17	NA	460	510	NA	Highest PCE and TCE conc.
OMS-28-GW21-18	5/5/17	NA	11.85	230	NA	This deeper depth included
OMS-28-GW21-30	5/5/17	NA	< 1	< 1	NA	This deeper depth included
OMS-28-GW26-31	5/9/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW34-19	5/17/17	NA	< 1	2.56	NA	Not considered within the core/center of the plume
OMS-28-GW34-31	5/17/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW36-12	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW36-18	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW36-29	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW37-12	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW37-19	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW37-28	5/11/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW38-12	5/11/17	NA	59.7	11.8	NA	Not considered within the core/center of the plume
OMS-28-GW38-18	5/11/17	NA	14.2	1.5	NA	Not considered within the core/center of the plume
OMS-28-GW38-30	5/11/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW47-19	5/17/17	NA	< 1	3.32	NA	Not considered within the core/center of the plume
OMS-28-GW47-32	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW49-12	5/15/17	< 0.5	< 0.5	< 0.5	< 0.015	Not considered within the core/center of the plume
OMS-28-GW49-18	5/15/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW49-30	5/15/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW50-13	5/15/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW50-18	5/15/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW50-30	5/15/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW51-30	5/13/17	NA	< 1	< 1	NA	GW51 is within identified plume
OMS-28-GW54-12	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW54-19	5/13/17	NA	< 1	7.5	NA	Not considered within the core/center of the plume
OMS-28-GW54-32	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume



**Table 1b**  
**Groundwater COPCs and Rationale for Including Samples in the Core of the VOC Plume for Each Parcel** <sup>(1)</sup>  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Sample ID <sup>(2)</sup>	Date Collected	cis-1,2-Dichloroethene	Tetrachloroethene	Trichloroethene	Vinyl Chloride	Reason for Inclusion in Plume
<b>Parcel F (Continued)</b>						
OMS-28-GW55-12	5/13/17	NA	< 1	0.65	NA	Not considered within the core/center of the plume
OMS-28-GW55-19	5/13/17	NA	< 1	2.9	NA	Not considered within the core/center of the plume
OMS-28-GW55-32	5/13/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW59-10	5/16/17	NA	1.86	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW59-18	5/16/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW59-30	5/16/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW61-12	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW61-19	5/17/17	NA	< 1	2.01	NA	Not considered within the core/center of the plume
OMS-28-GW61-31	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW63-12	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW63-19	5/17/17	NA	< 1	2.41	NA	Not considered within the core/center of the plume
OMS-28-GW63-30	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW65-12	5/17/17	NA	37.71	5.49	NA	Not considered within the core/center of the plume
OMS-28-GW65-19	5/17/17	NA	30.75	2.02	NA	Not considered within the core/center of the plume
OMS-28-GW65-29	5/17/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume
OMS-28-GW71-19	5/19/17	NA	< 1	4.7	NA	Not considered within the core/center of the plume
OMS-28-GW71-30	5/19/17	NA	< 1	< 1	NA	Not considered within the core/center of the plume

**Notes:**

(1) USEPA "...generally recommends that monitoring wells within the core/center of the plume be used to calculate the GW EPC for each contaminant." (OSWER Directive 9283.1-42, February 2014)

(2) Groundwater locations identified as having elevated concentrations within the core/center of the parcel-specific VOC plumes are shown on Figure 5 and are discussed in Section 3.3 of the text.

All concentrations are in units of ug/L.

COPC - Chemical of potential concern

NA - Not analyzed

— - Chemical is not a COPC, so results are not shown

**Table 2**  
**Identification of COPCs in Surface Soil**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical <sup>(1)</sup>	Minimum Concentration <sup>(2)</sup>	Maximum Concentration <sup>(2)</sup>	Units	Sample Designation of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening <sup>(3)</sup>	Screening Value <sup>(4)</sup>	Background Value <sup>(5)</sup>	COPC?	Rationale Code <sup>(6)</sup>
<b>Parcel A</b>											
<b>Tetrachloroethene</b>	<b>0.0012 J/J</b>	<b>329</b>	<b>mg/kg</b>	<b>OMS-28-SB24-1</b>	<b>7 / 8</b>	<b>0.0006 - 3.07</b>	<b>329</b>	<b>8.1</b>	<b>NSV</b>	<b>Yes</b>	<b>ASL</b>
Trichloroethene	0.0034 /J	0.014 /J	mg/kg	OMS-28-SB29-1	3 / 8	0.0006 - 1.54	0.014	0.41	NSV	No	BSL
<b>Parcel E</b>											
Acetone	0.0044 J/J	0.0044 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000395	0.0044	6100	NSV	No	BSL
Benzene	0.00050 J/J	0.00050 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000197	0.00050	1.2	NSV	No	BSL
Cyclohexane	0.00070 J/J	0.00070 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000197	0.00070	650	NSV	No	BSL
Methylcyclohexane	0.0014 J/J	0.0014 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000197	0.0014	650	NSV	No	BSL
Methylene chloride	0.0031 J/J	0.0031 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.00079	0.0031	35	NSV	No	BSL
Toluene	0.0014 J/J	0.0014 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000197	0.0014	490	NSV	No	BSL
Xylenes (total)	0.00086 J/J	0.00086 J/J	mg/kg	OMS-28-SB04-1	1 / 1	0.000395	0.00086	58	NSV	No	BSL
<b>Parcel F</b>											
2-Butanone	0.0040 J/J	0.0040 J/J	mg/kg	OMS-28-SB14-1	1 / 1	0.000443	0.0040	2700	NSV	No	BSL
4-Methyl-2-pentanone	0.0014 J/J	0.0014 J/J	mg/kg	OMS-28-SB14-1	1 / 1	0.000221	0.0014	3300	NSV	No	BSL
Acetone	0.083	0.083	mg/kg	OMS-28-SB14-1	1 / 1	0.000443	0.083	6100	NSV	No	BSL
Methylene chloride	0.0019 J/J	0.0019 J/J	mg/kg	OMS-28-SB14-1	1 / 1	0.000886	0.0019	35	NSV	No	BSL
Tetrachloroethene	0.033	0.057 /J	mg/kg	OMS-28-SB19-1	2 / 14	0.000443 - 0.0006	0.057	8.1	NSV	No	BSL

**Notes:**

- (1) Surface soil was collected from 0.5 to 1 foot. Only detected chemicals are shown.  
Surface soil samples were not collected from Parcels B, C, D, and G.
- (2) Minimum/maximum detected concentration and associated qualifiers.
- (3) Maximum concentration is used for screening.
- (4) The screening value is the residential soil value from the Regional Screening Level (RSL) Table based on risk of 1E-06 for carcinogens and HQ of 0.1 for noncarcinogens (USEPA, November 2018).  
The value for cyclohexane was used for methylcyclohexane.
- (5) Background values are not available.
- (6) Rationale Codes:  
Selection Reason: ASL - Above Screening Level  
Deletion Reason: BSL - Below Screening Level  
**Bold font** indicates selection as a COPC.

**Data Qualifiers:**

- The "/" separates the laboratory added data qualifiers from the validation data qualifiers.  
 J - Estimated result less than the Reporting Detection Limit (RDL) and greater than or equal to the Method Detection Limit (MDL).  
 /J - The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

**Definitions:**

- mg/kg - Milligrams per Kilogram  
 COPC - Chemical of Potential Concern  
 NSV - No Screening Value  
 USEPA - United States Environmental Protection Agency

**Table 3**  
**Identification of COPCs in Subsurface Soil**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical <sup>(1)</sup>	Minimum Concentration <sup>(2)</sup>	Maximum Concentration <sup>(2)</sup>	Units	Sample Designation of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening <sup>(3)</sup>	Screening Value <sup>(4)</sup>	Background Value <sup>(5)</sup>	COPC?	Rationale Code <sup>(6)</sup>
<b>Parcel A</b>											
Tetrachloroethene	0.002439024	53.7	mg/kg	OMS-28-SB24-3	12 / 16	0.0006 - 0.464	53.7	8.1	NSV	Yes	ASL
Trichloroethene	0.001658768	0.00863747	mg/kg	OMS-28-SB29-3	5 / 16	0.0006 - 0.232	0.00863747	0.41	NSV	No	BSL
<b>Parcel E</b>											
Methylene chloride	0.00909 J/J	0.00909 J/J	mg/kg	OMS-28-SB11-6	1 / 1	0.001	0.00909	35	NSV	No	BSL
<b>Parcel F</b>											
Acetone	0.00616 J/J	0.0098 J/J	mg/kg	OMS-28-SB01-2	2 / 3	0.000358 - 0.000468	0.0098	6100	NSV	No	BSL
Methylene chloride	0.00273 J/J	0.0113	mg/kg	OMS-28-SB01-2	3 / 3	0.000715 - 0.000936	0.0113	35	NSV	No	BSL
Tetrachloroethene	0.001233046 J/J	0.02638191	mg/kg	OMS-28-SB19-5	4 / 28	0.000358 - 0.0006	0.02638191	8.1	NSV	No	BSL
Trichloroethene	0.002512563	0.002512563	mg/kg	OMS-28-SB19-5	1 / 28	0.000179 - 0.0006	0.002512563	0.41	NSV	No	BSL

**Notes:**

- (1) Subsurface soil was collected from 1 to 6 feet. Only detected chemicals are shown.  
Subsurface soil samples were not collected from Parcels B, C, D, and G.
  - (2) Minimum/maximum detected concentration and associated qualifiers.
  - (3) Maximum concentration is used for screening.
  - (4) The screening value is the residential soil value from the Regional Screening Level (RSL) Table based on risk of 1E-06 for carcinogens and HQ of 0.1 for noncarcinogens (USEPA, November 2018).
  - (5) Background values are not available.
  - (6) Rationale Codes:  
Selection Reason: ASL - Above Screening Level  
Deletion Reason: BSL - Below Screening Level
- Bold font** indicates selection as a COPC.

**Data Qualifiers:**

- The "/" separates the laboratory added data qualifiers from the validation data qualifiers.
- J/ - Estimated result less than the Reporting Detection Limit (RDL) and greater than or equal to the Method Detection Limit (MDL).
- /J - The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

**Definitions:**

- mg/kg - Milligrams per Kilogram  
COPC - Chemical of Potential Concern  
NSV - No Screening Value  
USEPA - United States Environmental Protection Agency

**Table 4**  
**Identification of COPCs in Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical <sup>(1)</sup>	Minimum Concentration <sup>(2)</sup>	Maximum Concentration <sup>(2)</sup>	Units	Sample Designation of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening <sup>(3)</sup>	Screening Value <sup>(4)</sup>	Background Value <sup>(5)</sup>	COPC?	Rationale Code <sup>(6)</sup>
<i>Parcel A</i>											
Tetrachloroethene	0.863 J/J	40000	ug/L	OMS-28-GW22-11	15 / 24	0.2 - 0.51	40000	4.1	NSV	Yes	ASL
Trichloroethene	0.751 J/J	46	ug/L	OMS-28-GW40-20	14 / 24	0.2 - 0.51	46	0.28	NSV	Yes	ASL
Vinyl Chloride	0.0063 J/J	0.0063 J/J	ug/L	OMS-28-GW41-20	1 / 2	0.0046	0.0063	0.019	NSV	No	BSL
<i>Parcel B</i>											
Tetrachloroethene	0.56 J/J	3.6	ug/L	OMS-28-GW42-12	4 / 11	0.2 - 0.51	3.6	4.1	NSV	No	BSL
Trichloroethene	0.62 J/J	10	ug/L	OMS-28-GW43-28	5 / 11	0.2 - 0.51	10	0.28	NSV	Yes	ASL
<i>Parcel C</i>											
Methylene chloride	0.709 J/J	0.709 J/J	ug/L	OMS-28-2-011916	1 / 2	0.2	0.709	11	NSV	No	BSL
Trichloroethene	4.43	4.43	ug/L	OMS-28-GW44-28	1 / 5	0.2 - 0.51	4.43	0.28	NSV	Yes	ASL
<i>Parcel D</i>											
Trichloroethene	0.584 J/J	27.1	ug/L	OMS-28-GW64-33	6 / 18	0.2 - 0.51	27.1	0.28	NSV	Yes	ASL
<i>Parcel E</i>											
Acetone	5.05 Q/J	5.05 Q/J	ug/L	OMS-28-GW62-19	1 / 11	0.5 - 1	5.05	1400	NSV	No	BSL
cis-1,2-Dichloroethene	0.521 J/J	7.56	ug/L	OMS-28-GW85-19	9 / 32	0.2 - 0.4	7.56	3.6	NSV	Yes	ASL
Methylene chloride	0.771 J/J	0.771 J/J	ug/L	OMS-28-7-012016	1 / 11	0.2 - 0.4	0.771	11	NSV	No	BSL
Trichloroethene	0.373 J/J	291	ug/L	OMS-28-GW85-19	28 / 68	0.2 - 0.51	291	0.28	NSV	Yes	ASL
Vinyl Chloride	0.008 J/J	0.034 J/J	ug/L	OMS-28-GW86-16	4 / 32	0.0046 - 0.2	0.034	0.019	NSV	Yes	ASL
<i>Parcel F</i>											
1,1-Dichloroethene	1.29 J/J	1.29 J/J	ug/L	OMS-28-5_050517	1 / 19	0.2 - 1	1.29	28	NSV	No	BSL
2-Butanone	3.87 J/J	3.87 J/J	ug/L	OMS-28-GW02-19	1 / 19	0.2 - 1	3.87	560	NSV	No	BSL
Acetone	12.2	12.2	ug/L	OMS-28-GW02-19	1 / 19	0.5 - 2.5	12.2	1400	NSV	No	BSL
Carbon disulfide	0.666 J/J	0.666 J/J	ug/L	OMS-28-GW11-11	1 / 19	0.2 - 1	0.666	81	NSV	No	BSL
cis-1,2-Dichloroethene	0.927 J/J	103	ug/L	OMS-28-5_050517	6 / 19	0.2 - 1	103	3.6	NSV	Yes	ASL
Isopropylbenzene	0.374 J/J	0.374 J/J	ug/L	OMS-28-GW11-11	1 / 19	0.2 - 1	0.374	45	NSV	No	BSL
Methylene chloride	0.527 J/J	0.527 J/J	ug/L	OMS-28-3-012116	1 / 19	0.2 - 1	0.527	11	NSV	No	BSL
Tetrachloroethene	0.88 J/J	460	ug/L	OMS-28-GW21-12	11 / 103	0.2 - 1	460	4.1	NSV	Yes	ASL
trans-1,2-Dichloroethene	10.3	31.6	ug/L	OMS-28-5_050517	2 / 19	0.2 - 1	31.6	36	NSV	No	BSL
Trichloroethene	0.52 J/J	510	ug/L	OMS-28-GW21-12	39 / 103	0.2 - 1	510	0.28	NSV	Yes	ASL
Vinyl chloride	0.011 J/J	0.18	ug/L	OMS-28-GW18-18	3 / 18	0.0046 - 1	0.18	0.019	NSV	Yes	ASL
<i>Parcel G</i>											
Methylene chloride	0.504 J/J	0.504 J/J	ug/L	OMS-28-1-012116	1 / 4	0.2	0.504	11	NSV	No	BSL

Notes are shown on the following page.

**Table 4**  
**Identification of COPCs in Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Notes:**

- (1) Only detected chemicals in each groundwater parcel are shown.
- (2) Minimum/maximum detected concentration and associated qualifiers.
- (3) Maximum concentration is used for screening.
- (4) The screening value is the tapwater value from the Regional Screening Level (RSL) Table based on risk of 1E-06 for carcinogens and HQ of 0.1 for noncarcinogens (USEPA, November 2018).  
If the maximum detected concentration exceeds the USEPA Maximum Contaminant Level (MCL; March 2018), the chemical is also retained as a COPC.
- (5) Background values are not available.
- (6) Rationale Codes:  
    Selection Reason: ASL - Above Screening Level  
    Deletion Reason: BSL - Below Screening Level

**Bold font** indicates selection as a COPC.

**Data Qualifiers:**

The "/" separates the laboratory added data qualifiers from the validation data qualifiers.

J/ - Estimated result less than the Reporting Detection Limit (RDL) and greater than or equal to the Method Detection Limit (MDL).

Q/ - Indicates a non-compliant QC result.

/J - The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

**Definitions:**

ug/L - Micrograms per Liter

COPC - Chemical of Potential Concern

NSV - No Screening Value

USEPA - United States Environmental Protection Agency

**Table 5**  
**Identification of Vapor Intrusion COPCs in Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical <sup>(1)</sup>	Minimum Concentration <sup>(2)</sup>	Maximum Concentration <sup>(2)</sup>	Units	Sample Designation of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening <sup>(3)</sup>	Screening Value <sup>(4)</sup>	Background Value <sup>(5)</sup>	COPC?	Rationale Code <sup>(6)</sup>
<b>Commercial/Industrial Scenario</b>											
<i>Parcel A</i>											
Tetrachloroethene	0.863 J/J	40,000	ug/L	OMS-28-GW22-11	14 / 22	0.2 - 0.51	40,000	29.7	NSV	Yes	ASL
Trichloroethene	0.751 J/J	46	ug/L	OMS-28-GW40-20	14 / 22	0.2 - 0.51	46	2.59	NSV	Yes	ASL
Vinyl Chloride	0.0063 J/J	0.0063 J/J	ug/L	OMS-28-GW41-20	1 / 2	0.0046	0.0063	2.69	NSV	No	BSL
<i>Parcel B</i>											
Tetrachloroethene	0.56 J/J	3.6	ug/L	OMS-28-GW42-12	4 / 9	0.2 - 0.51	3.6	29.7	NSV	No	BSL
Trichloroethene	1	10	ug/L	OMS-28-GW43-28	4 / 9	0.2 - 0.51	10	2.59	NSV	Yes	ASL
<i>Parcel C</i>											
Methylene chloride	0.709 J/J	0.709 J/J	ug/L	OMS-28-2-011916	1 / 2	0.2	0.709	2290	NSV	No	BSL
Trichloroethene	4.43	4.43	ug/L	OMS-28-GW44-28	1 / 4	0.2 - 0.51	4.43	2.59	NSV	Yes	ASL
<i>Parcel D</i>											
Trichloroethene	8.1	9.02	ug/L	OMS-28-GW75-29	2 / 9	0.2 - 0.51	9.02	8.86	NSV	Yes	ASL
<i>Parcel E</i>											
Acetone	5.05 Q/J	5.05 Q/J	ug/L	OMS-28-GW62-19	1 / 10	0.5 - 1	5.05	11,100,000	NSV	No	BSL
cis-1,2-Dichloroethene	0.521 J/J	7.56	ug/L	OMS-28-GW85-19	8 / 23	0.2 - 0.4	7.56	—	NSV	No	NSL
Methylene chloride	0.771 J/J	0.771 J/J	ug/L	OMS-28-7-012016	1 / 10	0.2 - 0.4	0.771	2290	NSV	No	BSL
Trichloroethene	0.373 J/J	291	ug/L	OMS-28-GW85-19	23 / 45	0.2 - 0.51	291	2.59	NSV	Yes	ASL
Vinyl Chloride	0.008 J/J	0.034 J/J	ug/L	OMS-28-GW86-16	4 / 23	0.0046 - 0.2	0.034	2.69	NSV	No	BSL
<i>Parcel F</i>											
1,1-Dichloroethene	1.29 J/J	1.29 J/J	ug/L	OMS-28-5_050517	1 / 13	0.2 - 1	1.29	93.8	NSV	No	BSL
2-Butanone	3.87 J/J	3.87 J/J	ug/L	OMS-28-GW02-19	1 / 13	0.2 - 1	3.87	1,120,000	NSV	No	BSL
Acetone	12.2	12.2	ug/L	OMS-28-GW02-19	1 / 13	0.5 - 2.5	12.2	11,100,000	NSV	No	BSL
Carbon disulfide	0.666 J/J	0.666 J/J	ug/L	OMS-28-GW11-11	1 / 13	0.2 - 1	0.666	598	NSV	No	BSL
cis-1,2-Dichloroethene	0.927 J/J	103	ug/L	OMS-28-5_050517	6 / 13	0.2 - 1	103	—	NSV	No	NSL
Isopropylbenzene	0.374 J/J	0.374 J/J	ug/L	OMS-28-GW11-11	1 / 13	0.2 - 1	0.374	490	NSV	No	BSL
Methylene chloride	0.527 J/J	0.527 J/J	ug/L	OMS-28-3-012116	1 / 13	0.2 - 1	0.527	2290	NSV	No	BSL
Tetrachloroethene	1.86	460	ug/L	OMS-28-GW21-12	10 / 72	0.2 - 1	460	29.7	NSV	Yes	ASL
trans-1,2-Dichloroethene	10.3	31.6	ug/L	OMS-28-5_050517	2 / 13	0.2 - 1	31.6	—	NSV	No	NSL
Trichloroethene	0.52 J/J	510	ug/L	OMS-28-GW21-12	38 / 72	0.2 - 1	510	2.59	NSV	Yes	ASL
Vinyl chloride	0.011 J/J	0.18	ug/L	OMS-28-GW18-18	3 / 12	0.0046 - 1	0.18	2.69	NSV	No	BSL

**Table 5**  
**Identification of Vapor Intrusion COPCs in Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical <sup>(1)</sup>	Minimum Concentration <sup>(2)</sup>	Maximum Concentration <sup>(2)</sup>	Units	Sample Designation of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening <sup>(3)</sup>	Screening Value <sup>(4)</sup>	Background Value <sup>(5)</sup>	COPC?	Rationale Code <sup>(6)</sup>
<b>Residential Scenario</b>											
<i>Parcel A</i>											
Tetrachloroethene	0.863 J/J	40,000	ug/L	OMS-28-GW22-11	14 / 22	0.2 - 0.51	40,000	7.06	NSV	Yes	ASL
Trichloroethene	0.751 J/J	46	ug/L	OMS-28-GW40-20	14 / 22	0.2 - 0.51	46	0.618	NSV	Yes	ASL
Vinyl Chloride	0.0063 J/J	0.0063 J/J	ug/L	OMS-28-GW41-20	1 / 2	0.0046	0.0063	0.162	NSV	No	BSL
<i>Parcel B</i>											
Tetrachloroethene	0.56 J/J	3.6	ug/L	OMS-28-GW42-12	4 / 9	0.2 - 0.51	3.6	7.06	NSV	No	BSL
Trichloroethene	1	10	ug/L	OMS-28-GW43-28	4 / 9	0.2 - 0.51	10	0.618	NSV	Yes	ASL
<i>Parcel C</i>											
Methylene chloride	0.709 J/J	0.709 J/J	ug/L	OMS-28-2-011916	1 / 2	0.2	0.709	545	NSV	No	BSL
Trichloroethene	4.43	4.43	ug/L	OMS-28-GW44-28	1 / 4	0.2 - 0.51	4.43	0.618	NSV	Yes	ASL
<i>Parcel D <sup>(7)</sup></i>											
Trichloroethene	8.1	9.02	ug/L	OMS-28-GW75-29	2 / 9	0.2 - 0.51	9.02	1.42	NSV	Yes	ASL
<i>Parcel E</i>											
Acetone	5.05 Q/J	5.05 Q/J	ug/L	OMS-28-GW62-19	1 / 10	0.5 - 1	5.05	2,630,000	NSV	No	BSL
cis-1,2-Dichloroethene	0.521 J/J	7.56	ug/L	OMS-28-GW85-19	8 / 23	0.2 - 0.4	7.56	—	NSV	No	NSL
Methylene chloride	0.771 J/J	0.771 J/J	ug/L	OMS-28-7-012016	1 / 10	0.2 - 0.4	0.771	545	NSV	No	BSL
Trichloroethene	0.373 J/J	291	ug/L	OMS-28-GW85-19	23 / 45	0.2 - 0.51	291	0.618	NSV	Yes	ASL
Vinyl Chloride	0.008 J/J	0.034 J/J	ug/L	OMS-28-GW86-16	4 / 23	0.0046 - 0.2	0.034	0.162	NSV	No	BSL
<i>Parcel F</i>											
1,1-Dichloroethene	1.29 J/J	1.29 J/J	ug/L	OMS-28-5_050517	1 / 13	0.2 - 1	1.29	22.3	NSV	No	BSL
2-Butanone	3.87 J/J	3.87 J/J	ug/L	OMS-28-GW02-19	1 / 13	0.2 - 1	3.87	267,000	NSV	No	BSL
Acetone	12.2	12.2	ug/L	OMS-28-GW02-19	1 / 13	0.5 - 2.5	12.2	2,630,000	NSV	No	BSL
Carbon disulfide	0.666 J/J	0.666 J/J	ug/L	OMS-28-GW11-11	1 / 13	0.2 - 1	0.666	142	NSV	No	BSL
cis-1,2-Dichloroethene	0.927 J/J	103	ug/L	OMS-28-5_050517	6 / 13	0.2 - 1	103	—	NSV	No	NSL
Isopropylbenzene	0.374 J/J	0.374 J/J	ug/L	OMS-28-GW11-11	1 / 13	0.2 - 1	0.374	117	NSV	No	BSL
Methylene chloride	0.527 J/J	0.527 J/J	ug/L	OMS-28-3-012116	1 / 13	0.2 - 1	0.527	545	NSV	No	BSL
Tetrachloroethene	1.86	460	ug/L	OMS-28-GW21-12	10 / 72	0.2 - 1	460	7.06	NSV	Yes	ASL
trans-1,2-Dichloroethene	10.3	31.6	ug/L	OMS-28-5_050517	2 / 13	0.2 - 1	31.6	—	NSV	No	NSL
Trichloroethene	0.52 J/J	510	ug/L	OMS-28-GW21-12	38 / 72	0.2 - 1	510	0.618	NSV	Yes	ASL
Vinyl chloride	0.011 J/J	0.18	ug/L	OMS-28-GW18-18	3 / 12	0.0046 - 1	0.18	0.162	NSV	Yes	ASL

Notes are shown on the following page.

**Table 5**  
**Identification of Vapor Intrusion COPCs in Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Notes:**

— - No Inhalation Toxicity Information

(1) Only detected chemicals in each groundwater parcel are shown.

Parcel G had no detections in shallow groundwater that could migrate into indoor air.

(2) Minimum/maximum detected concentration and associated qualifiers.

(3) Maximum concentration is used for screening.

(4) Screening value is the Vapor Intrusion Screening Level (VISL) target groundwater concentration from USEPA's VISL Calculator accessed online at [https://epa-visl.ornl.gov/cgi-bin/visl\\_search](https://epa-visl.ornl.gov/cgi-bin/visl_search) (Output is included in Appendix A).

A temperature of 21 degrees Celsius, a target risk of 1E-6, and an HQ of 0.1 were used in the VISL Calculator, with the following exception: An HQ of 1, instead of 0.1, was used for trichloroethene at Parcel D, since it was the only detected chemical.

(5) Background values are not available.

(6) Rationale Codes:

Selection Reason: ASL - Above Screening Level

Deletion Reason: BSL - Below Screening Level; NSL - No Screening Level

(7) There is no current resident at Parcel D to be evaluated for vapor intrusion from groundwater. A resident does exist, however, at Parcel H, which is immediately east of Parcel D. This resident lives within 100 feet of the VOC plume beneath Parcel D and will be evaluated for vapor intrusion using the groundwater data collected at and the COPC identified at Parcel D.

**Bold font** indicates selection as a COPC.

**Data Qualifiers:**

The "/" separates the laboratory added data qualifiers from the validation data qualifiers.

J/ - Estimated result less than the Reporting Detection Limit (RDL) and greater than or equal to the Method Detection Limit (MDL).

Q/ - Indicates a non-compliant QC result.

/I - The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

**Definitions:**

ug/L - Micrograms per Liter

COPC - Chemical of Potential Concern

NSV - No Screening Value

USEPA - United States Environmental Protection Agency



**Table 6**  
**Exposure Point Concentration Summary — Surface Soil**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Current/Future
Medium: Surface Soil
Exposure Medium: Surface Soil

Exposure Point	Chemical of Potential Concern	Units	Arithmetic Mean <sup>(1)</sup>	95% UCL <sup>(1)</sup> (Distribution)	Maximum Concentration (Qualifier)	Exposure Point Concentration			
						Value	Units	Statistic <sup>(2)</sup>	Rationale
Surface Soil	<i>Parcel A</i> Tetrachloroethene	mg/kg	54.28	572    Gamma Adjusted KM-UCL	329	329	mg/kg	Max	Footnote (4)

**Notes:**

(1) Arithmetic mean and 95% Upper Confidence Limit (UCL) were calculated using USEPA's ProUCL Version 5.1.002 statistical software package. Method used to compute selected UCL is shown.

    KM - Kaplan-Meier

(2) Statistic: Maximum Detected Value (Max); 95% UCL (95% UCL).

(3) The 95% UCL is lower than the maximum concentration and is selected as the exposure point concentration.

(4) The 95% UCL either could not be calculated or exceeded the maximum concentration; the maximum value was selected as the exposure point concentration.

mg/kg - milligrams per kilogram

**Table 7**  
**Exposure Point Concentration Summary — Subsurface Soil**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Current/Future
Medium: Subsurface Soil
Exposure Medium: Subsurface Soil

Exposure Point	Chemical of Potential Concern	Units	Arithmetic Mean <sup>(1)</sup>	95% UCL <sup>(1)</sup> (Distribution)	Maximum Concentration (Qualifier)	Exposure Point Concentration			
						Value	Units	Statistic <sup>(2)</sup>	Rationale
Subsurface Soil	<i>Parcel A</i> Tetrachloroethene	mg/kg	6.578	20.75 95% KM Chebyshev UCL	53.7	20.75	mg/kg	95% UCL	Footnote (3)

**Notes:**

(1) Arithmetic mean and 95% Upper Confidence Limit (UCL) were calculated using USEPA's ProUCL Version 5.1.002 statistical software package. Method used to compute selected UCL is shown.

KM - Kaplan-Meier

(2) Statistic: Maximum Detected Value (Max); 95% UCL (95% UCL).

(3) The 95% UCL is lower than the maximum concentration and is selected as the exposure point concentration.

(4) The 95% UCL either could not be calculated or exceeded the maximum concentration; the maximum value was selected as the exposure point concentration.

mg/kg - milligrams per kilogram

**Table 8**  
**Exposure Point Concentration Summary — Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Groundwater

Exposure Point	Chemical of Potential Concern	Units	Arithmetic Mean <sup>(1)</sup>	95% UCL <sup>(1)</sup> (Distribution)		Maximum Concentration (Qualifier)	Exposure Point Concentration			
							Value	Units	Statistic <sup>(2)</sup>	Rationale
Groundwater	<b>Parcel A</b>									
	Tetrachloroethene	ug/L	3447	12235	95% KM Chebyshev UCL	40000	12235	ug/L	95% UCL	Footnote (3)
	Trichloroethene	ug/L	17.8	17.87	95% KM (t) UCL	46	17.87	ug/L	95% UCL	Footnote (3)
	<b>Parcel B</b>									
	Trichloroethene	ug/L	NC		NC	10	10	ug/L	Max	Footnote (4)
	<b>Parcel C</b>									
	Trichloroethene	ug/L	NC		NC	4.43	4.43	ug/L	Max	Footnote (4)
	<b>Parcel D</b>									
	Trichloroethene	ug/L	11.38	19.76	95% KM (t) UCL	27.1	19.76	ug/L	95% UCL	Footnote (3)
	<b>Parcel E</b>									
	cis-1,2-Dichloroethene	ug/L	3.806	4.372	95% KM (t) UCL	7.56	4.372	ug/L	95% UCL	Footnote (3)
	Trichloroethene	ug/L	110.2	144.8	95% KM (t) UCL	291	144.8	ug/L	95% UCL	Footnote (3)
	Vinyl Chloride	ug/L	0.028	0.0346	95% KM (t) UCL	0.034 J/J	0.034	ug/L	Max	Footnote (4)
	<b>Parcel F</b>									
	cis-1,2-Dichloroethene	ug/L	33.54	89.93	95% Student's-t UCL	103	89.93	ug/L	95% UCL	Footnote (3)
Tetrachloroethene	ug/L	221.3	190.1	95% KM (t) UCL	460	190.1	ug/L	95% UCL	Footnote (3)	
Trichloroethene	ug/L	174.9	189.3	95% KM (t) UCL	510	189.3	ug/L	95% UCL	Footnote (3)	
Vinyl chloride	ug/L	0.102	0.442	95% KM (Chebyshev) UCL	0.18	0.18	ug/L	Max	Footnote (4)	

**Notes:**

(1) Arithmetic mean and 95% Upper Confidence Limit (UCL) were calculated using USEPA's ProUCL Version 5.1.002 statistical software package. Method used to compute selected UCL is shown.

In evaluating groundwater from Shallow/Intermediate wells, the following locations were identified as the core of the plume for each parcel for calculating the 95% UCL:

Parcel A OMS-28-GW19-12, -GW19-19, -GW19-30, -GW22-11, -GW22-20, -GW22-28, -GW23-12, -GW23-20, -GW23-28, -GW24-12, -GW24-19, -GW24-30, -GW39-13, -GW39-20, -GW39-28, -GW40-13, -GW40-20, and -GW40-28.

Parcel B OMS-28-GW43-12, -GW43-20, and -GW43-28

Parcel C OMS-28-GW44-28

Parcel D OMS-28-GW46-16, -GW46-33, -GW64-16, -GW64-33, and -GW75-29.

Parcel E OMS-28-GW32-12, -GW32-19, -GW32-31, -GW85-13, -GW85-19, -GW85-31, -GW86-12, -GW86-16, -GW86-31, and -GW87-31.

Parcel F OMS-28-5\_050517, -5-012016, -GW18-12, -GW18-18, -GW18-30, -GW20-12, -GW20-19, -GW20-28, -GW21-12, -GW21-18, -GW21-30, and -GW51-30.

(2) Statistic: Maximum Detected Value (Max); 95% UCL (95% UCL).

(3) The 95% UCL is lower than the maximum concentration and is selected as the exposure point concentration.

(4) The 95% UCL either could not be calculated or exceeded the maximum concentration; the maximum value was selected as the exposure point concentration.

KM - Kaplan-Meier

NC - not calculated

ug/L - micrograms per liter

**Table 9**  
**Exposure Point Concentration Summary — Groundwater Vapors Migrating into Indoor Air**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Air

Exposure Point	Chemical of Potential Concern	Units	Arithmetic Mean <sup>(1)</sup>	95% UCL <sup>(1)</sup> (Distribution)	Maximum Concentration (Qualifier)	Exposure Point Concentration			
						Value	Units	Statistic <sup>(3)</sup>	Rationale
Groundwater	<b>Parcel A</b>								
	Tetrachloroethene	ug/L	3734	13751 95% KM Chebyshev UCL	40000	13751	ug/L	95% UCL	Footnote (4)
	Trichloroethene	ug/L	17.8	19.84 95% KM (t) UCL	46	19.84	ug/L	95% UCL	Footnote (4)
	<b>Parcel B</b>								
	Trichloroethene	ug/L	NC	NC	10	10	ug/L	Max	Footnote (5)
	<b>Parcel C</b>								
	Trichloroethene	ug/L	NC	NC	4.43	4.43	ug/L	Max	Footnote (5)
	<b>Parcel D <sup>(6)</sup></b>								
	Trichloroethene	ug/L	8.56	14.58 95% KM (t) UCL	9.02	9.02	ug/L	Max	Footnote (5)
	<b>Parcel E</b>								
	Trichloroethene	ug/L	126	230.4 95% Student's-t UCL	291	230.4	ug/L	95% UCL	Footnote (4)
	<b>Parcel F</b>								
Tetrachloroethene	ug/L	221.3	251.1 95% KM (t) UCL	460	251.1	ug/L	95% UCL	Footnote (4)	
Trichloroethene	ug/L	174.9	247.3 95% KM (t) UCL	510	247.3	ug/L	95% UCL	Footnote (4)	
Vinyl chloride	ug/L	0.102	0.442 95% KM (Chebyshev) UCL	0.18	0.18	ug/L	Max	Footnote (5)	

**Notes:**

(1) Arithmetic mean and 95% Upper Confidence Limit (UCL) were calculated using USEPA's ProUCL Version 5.1.002 statistical software package. Method used to compute selected UCL is shown.

In evaluating groundwater from Shallow/Intermediate wells, the following locations were identified as the core of the plume for each parcel for calculating the 95% UCL:

Parcel A OMS-28-GW19-12, -GW19-19, -GW22-11, -GW22-20, -GW22-28, -GW23-12, -GW23-20, -GW23-28, -GW24-12, -GW24-19, -GW39-13, -GW39-20, -GW39-28, -GW40-13, -GW40-20, and -GW40-28.

Parcel B OMS-28-GW43-12, -GW43-20, and -GW43-28

Parcel C OMS-28-GW44-28

Parcel D OMS-28-GW46-16, -GW64-16, and -GW75-29.

Parcel E OMS-28-GW32-12, -GW32-19, -GW85-13, -GW85-19, -GW86-12, and -GW86-16.

Parcel F OMS-28-5\_050517, -5-012016, -GW18-12, -GW18-18, -GW20-12, -GW20-19, -GW20-28, -GW21-12, and -GW21-18.

(2) Exposure point concentrations (EPCs) will be considered "site concentrations" for comparison to site-specific screening levels (SSSLs) on Table 18 for the vapor intrusion from groundwater pathway.

(3) Statistic: Maximum Detected Value (Max); 95% UCL (95% UCL).

(4) The 95% UCL is lower than the maximum concentration and is selected as the exposure point concentration.

(5) The 95% UCL either could not be calculated or exceeded the maximum concentration; the maximum value was selected as the exposure point concentration.

(6) There is no current resident at Parcel D to be evaluated for vapor intrusion from groundwater. A resident does exist, however, at Parcel H, which is immediately east of Parcel D. This resident lives within 100 feet of the VOC plume beneath Parcel D and will be evaluated for vapor intrusion using the trichloroethene groundwater exposure point concentration determined at Parcel D.

KM - Kaplan-Meier

NC - not calculated

ug/L - micrograms per liter

**Table 10**  
**Exposure Factors - Soil (Current/Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Current/Future
Medium:	Soil
Exposure Medium:	Soil

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Oral	Trespasser	Adolescent (7-16)	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				IR-S	Ingestion Rate of Soil	100	mg/day	USEPA, March 1991; USEPA, November 2018
				FI	Fraction Ingested from Site	1	--	USEPA, March 2018
				EF	Exposure Frequency	100	day/yr	(1)
				ED	Exposure Duration	10	years	USEPA, March 2018
				BW	Body Weight	45	kg	USEPA, March 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989
				AT-N	Averaging Time (Non-Cancer)	3650	days	USEPA, December 1989
	Industrial Worker	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				IR-S	Ingestion Rate of Soil	50	mg/day	USEPA, March 1991; USEPA November 2018
				FI	Fraction Ingested from Site	1	--	USEPA, March 2018
				EF	Exposure Frequency	250	day/yr	USEPA, March 1991; USEPA, November 2018
				ED	Exposure Duration	25	years	USEPA, March 1991; USEPA, November 2018
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)				
AT-N	Averaging Time (Non-Cancer)	9125	days	USEPA, December 1989 (ED x 365 d/y)				

**Table 10**  
**Exposure Factors - Soil (Current/Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Current/Future
Medium:	Soil
Exposure Medium:	Soil

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Trespasser	Adolescent (7-16)	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				AF	Adherence Factor	0.2	mg/cm <sup>2</sup> -day	USEPA, July 2004
				ABS	Absorption Fraction	Contaminant-specific	--	USEPA, July 2004
				SA	Skin Surface Area Available	3280	cm <sup>2</sup>	USEPA, September 2011 (2)
				EF	Exposure Frequency	100	day/yr	(1)
				ED	Exposure Duration	10	years	USEPA, March 2018
				BW	Body Weight	45	kg	USEPA, March 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989
	AT-N	Averaging Time (Non-Cancer)	3650	days	USEPA, December 1989			
	Industrial Worker	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				AF	Adherence Factor	0.12	mg/cm <sup>2</sup> -day	USEPA, September 2011; USEPA, November 2018
				ABS	Absorption Fraction	chemical-specific	--	USEPA, July 2004
				SA	Skin Surface Area Available	3527	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (3)
				EF	Exposure Frequency	250	day/yr	USEPA, March 1991; USEPA, November 2018
ED				Exposure Duration	25	years	USEPA, March 1991; USEPA, November 2018	
BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018				
AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)				
AT-N	Averaging Time (Non-Cancer)	9125	days	USEPA, December 1989 (ED x 365 d/y)				

**Notes:**

(1) Based on 2 days per week for 12 months of the year.

(2) Represents face, hands, forearms and lower legs.

(3) Represents head, hands, and forearms.

USEPA, December 1989. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part A), Office of Emergency and Remedial Response. EPA/540/1-89/002.

USEPA, March 1991. Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors. Office of Solid Waste and Emergency Response. OSWER Directive 9285.6-03.

USEPA, July 2004. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part E), Office of Emergency and Remedial Response. EPA/540/R99/005.

USEPA, September 2011. Exposure Factors Handbook: 2011 Edition. EPA/600/R-09/052F.

USEPA, March 2018. Region 4 Human Health Risk Assessment Supplemental Guidance.

USEPA, November 2018. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

**Table 11**  
**Exposure Factors - Soil <sup>(1)</sup> (Current/Future - Inhalation)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Current/Future
Medium:	Soil
Exposure Medium:	Air

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Inhalation	Trespasser	Adolescent (7-16)	Inhalation of Volatiles	CF	Conversion Factor	1000	ug/mg	--
				VF	Volatilization Factor	2.79E+03	m <sup>3</sup> /kg	USEPA, November 2018a (2)
				ET	Exposure Time	2	hr/day	USEPA, January 2009
				EF	Exposure Frequency	100	day/yr	(3)
				ED	Exposure Duration	10	years	USEPA, March 2018
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
	AT-N	Averaging Time (Non-Cancer)	87,600	hours	ED x 365 d/yr x 24 hrs/day			
	Industrial Worker	Adult	Inhalation of Volatiles	CF	Conversion Factor	1000	ug/mg	--
				VF	Volatilization Factor	2.79E+03	m <sup>3</sup> /kg	USEPA, November 2018a (2)
				ET	Exposure Time	8	hr/day	USEPA, November 2018b
				EF	Exposure Frequency	250	day/yr	USEPA, March 1991; USEPA, November 2018b
				ED	Exposure Duration	25	years	USEPA, March 1991; USEPA, November 2018b
AT-C				Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day	
AT-N	Averaging Time (Non-Cancer)	219,000	hours	ED x 365 d/yr x 24 hrs/day				

**Notes:**

(1) Inhalation of volatiles will only be evaluated for surface soil.

(2) VF shown is for tetrachloroethene, the only chemical of potential concern evaluated in soil.

(3) Based on 2 days per week for 12 months of the year.

USEPA, March 1991. Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors. Office of Solid Waste and Emergency Response. OSWER Directive 9285.6-03.

USEPA, January 2009 Risk Assessment Guidance for Superfund - Volume I: Human Health Evaluation Manual (Part F, Supplemental Guidance for Inhalation Risk Assessment), Final. EPA-540-R-070-002.

USEPA, March 2018. Region 4 Human Health Risk Assessment Supplemental Guidance.

USEPA, November 2018a. Regional Screening Level Calculator accessed at [https://epa-prgs.orl.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.orl.gov/cgi-bin/chemicals/csl_search).

USEPA, November 2018b. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

**Table 12**  
**Exposure Factors - Soil (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Medium:	Soil
Exposure Medium:	Soil

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Oral	Construction Worker	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				IR-S	Ingestion Rate of Soil	330	mg/day	USEPA, December 2002; USEPA, November 2018
				FI	Fraction Ingested from Site	1	--	USEPA, March 2018
				EF	Exposure Frequency	250	day/yr	USEPA, December 2002; USEPA, November 2018
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time (Non-Cancer)	365	days	USEPA, December 1989 (ED x 365 d/y)
	Resident	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				IR-Sa	Ingestion Rate of Soil - adult	100	mg/day	USEPA, March 1991; USEPA, November 2018
				IR-Sc	Ingestion Rate of Soil - child	200	mg/day	USEPA, March 1991; USEPA, November 2018
				FI	Fraction Ingested from Site	1	--	USEPA, March 2018
				EFa	Exposure Frequency - adult	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EFc	Exposure Frequency - child	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EDa	Exposure Duration - adult	20	years	USEPA, November 2018
				EDc	Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018
				EDres	Exposure Duration - resident	26	years	USEPA, September 2011; USEPA, November 2018
				BWa	Body Weight - adult	80	kg	USEPA, September 2011; USEPA, November 2018
				BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)
		AT-N	Averaging Time (Non-Cancer)	9490	days	USEPA, December 1989 (ED x 365 d/y)		
		Child (0-6)	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				IR-Sc	Ingestion Rate of Soil - child	200	mg/day	USEPA, March 1991; USEPA, November 2018
				FI	Fraction Ingested from Site	1	--	USEPA, March 2018
				EFc	Exposure Frequency - child	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EDc	Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018
				BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018
AT-N	Averaging Time (Non-Cancer)			2190	days	USEPA, December 1989 (ED x 365 d/y)		



**Table 12**  
**Exposure Factors - Soil (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Medium:	Soil
Exposure Medium:	Soil

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Construction Worker	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				AF	Adherence Factor	0.3	mg/cm <sup>2</sup> -day	USEPA, December 2002; USEPA, November 2018
				ABS	Absorption Fraction	chemical-specific	--	USEPA, July 2004
				SA	Skin Surface Area Available	3527	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (1)
				EF	Exposure Frequency	250	day/yr	USEPA, December 2002; USEPA, November 2018
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time (Non-Cancer)	365	days	USEPA, December 1989 (ED x 365 d/y)
	Resident	Adult	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				AFa	Adherence Factor - adult	0.07	mg/cm <sup>2</sup> -day	USEPA, December 2002; USEPA, November 2018
				AFc	Adherence Factor - child	0.2	mg/cm <sup>2</sup> -day	USEPA, December 2002; USEPA, November 2018
				ABS	Absorption Fraction	chemical-specific	--	USEPA, July 2004
				SAA	Skin Surface Area Available - adult	6032	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (2)
				SAC	Skin Surface Area Available - child	2373	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (2)
				EFa	Exposure Frequency - adult	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EFc	Exposure Frequency - child	350	day/yr	USEPA, March 1991; USEPA, November 2018
EDa				Exposure Duration - adult	20	years	USEPA, November 2018	
EDc				Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018	
EDres	Exposure Duration - resident	26	years	USEPA, September 2011; USEPA, November 2018				
BWa	Body Weight - adult	80	kg	USEPA, September 2011; USEPA, November 2018				
BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018				
AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)				
AT-N	Averaging Time (Non-Cancer)	9490	days	USEPA, December 1989 (ED x 365 d/y)				

**Table 12**  
**Exposure Factors - Soil (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Medium:	Soil
Exposure Medium:	Soil

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Resident	Child (0-6)	Soil	CF	Conversion Factor	1.00E-06	kg/mg	--
				AFc	Adherence Factor	0.2	mg/cm <sup>2</sup> -day	USEPA, December 2002; USEPA, November 2018
				ABS	Absorption Fraction	chemical-specific	--	USEPA, July 2004
				SAc	Skin Surface Area Available	2373	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (2)
				EFc	Exposure Frequency	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EDc	Exposure Duration	6	years	USEPA, March 1991; USEPA, November 2018
				BWc	Body Weight	15	kg	USEPA, March 1991; USEPA, November 2018
				AT-N	Averaging Time (Non-Cancer)	2190	days	USEPA, December 1989 (ED x 365 d/y)

**Notes:**

- (1) Represents head, hands, and forearms.
- (2) Represents head, hands, forearms, lower legs, and feet.

USEPA, December 1989. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part A), Office of Emergency and Remedial Response. EPA/540/1-89/002.

USEPA, March 1991. Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors. Office of Solid Waste and Emergency Response. OSWER Directive 9285.6-03.

USEPA, December 2002. Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites. OSWER 9355.4-24.

USEPA, July 2004. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part E), Office of Emergency and Remedial Response. EPA/540/R99/005.

USEPA, September 2011. Exposure Factors Handbook: 2011 Edition. EPA/600/R-09/052F.

USEPA, March 2018. Region 4 Human Health Risk Assessment Supplemental Guidance.

USEPA, November 2018. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

**Table 13**  
**Exposure Factors - Soil<sup>(1)</sup> (Future - Inhalation)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Medium:	Soil
Exposure Medium:	Air

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Inhalation	Construction Worker	Adult	Inhalation of Volatiles	CF	Conversion Factor	1000	ug/mg	--
				VF	Volatilization Factor	2.79E+03	m <sup>3</sup> /kg	USEPA, November 2018a (2)
				ET	Exposure Time	8	hr/day	USEPA, November 2018b
				EF	Exposure Frequency	250	day/yr	USEPA, December 2002; USEPA, November 2018b
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018b
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
	AT-N	Averaging Time (Non-Cancer)	8,760	hours	ED x 365 d/yr x 24 hrs/day			
	Resident	Adult	Inhalation of Volatiles	CF	Conversion Factor	1000	ug/mg	--
				VF	Volatilization Factor	2.79E+03	m <sup>3</sup> /kg	USEPA, November 2018a (2)
				ET	Exposure Time	24	hr/day	USEPA, November 2018b
				EF	Exposure Frequency	350	day/yr	USEPA, March 1991; USEPA, November 2018b
				ED	Exposure Duration	26	years	USEPA, September 2011; USEPA, November 2018b
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
	AT-N	Averaging Time (Non-Cancer)	227,760	hours	ED x 365 d/yr x 24 hrs/day			
		Child (0-6)	Inhalation of Volatiles	CF	Conversion Factor	1000	ug/mg	--
				VF	Volatilization Factor	2.79E+03	m <sup>3</sup> /kg	USEPA, November 2018a (2)
				ET	Exposure Time	24	hr/day	USEPA, November 2018b
				EF	Exposure Frequency	350	day/yr	USEPA, March 1991; USEPA, November 2018b
ED				Exposure Duration	6	years	USEPA, March 1991; USEPA, November 2018b	
AT-N				Averaging Time (Non-Cancer)	52,560	hours	ED x 365 d/yr x 24 hrs/day	

**Notes:**

(1) For the adult and child resident, inhalation of volatiles will only be evaluated for surface soil.

(2) VF shown is for tetrachloroethene, the only chemical of potential concern evaluated in soil.

USEPA, March 1991. Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors. Office of Solid Waste and Emergency Response. OSWER Directive 9285.6-03.

USEPA, December 2002. Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites. OSWER 9355.4-24.

USEPA, September 2011. Exposure Factors Handbook: 2011 Edition. EPA/600/R-09/052F.

USEPA, November 2018a. Regional Screening Level Calculator accessed at [https://epa-prgs.oml.gov/cgi-bin/chemicals/csl\\_search](https://epa-prgs.oml.gov/cgi-bin/chemicals/csl_search).

USEPA, November 2018b. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

**Table 14**  
**Exposure Factors - Groundwater (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Groundwater

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Oral	Construction Worker	Adult	Groundwater	IR-W	Ingestion Rate of Groundwater	0.02	l/day	VDEQ, 2015
				EF	Exposure Frequency	250	day/yr	USEPA, December 2002; USEPA, November 2018
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time (Non-Cancer)	365	days	USEPA, December 1989 (ED x 365 d/y)
	Industrial Worker	Adult	Tap Water	IR-W	Ingestion Rate of Groundwater	1	l/day	USEPA, January 2014
				EF	Exposure Frequency	250	day/yr	USEPA, March 1991; USEPA, November 2018
				ED	Exposure Duration	25	years	USEPA, March 1991; USEPA, November 2018
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time (Non-Cancer)	9125	days	USEPA, December 1989 (ED x 365 d/y)
	Resident	Adult	Tap Water	IR-Wa	Ingestion Rate of Groundwater - adult	2.5	L/day	USEPA, September 2011; USEPA, November 2018
				IR-Wc	Ingestion Rate of Groundwater - child	0.78	L/day	USEPA, September 2011; USEPA, November 2018
				EFa	Exposure Frequency - adult	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EFc	Exposure Frequency - child	350	day/yr	USEPA, March 1991; USEPA, November 2018
				EDa	Exposure Duration - adult	20	years	USEPA, November 2018
				EDc	Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018
				EDres	Exposure Duration - resident	26	years	USEPA, September 2011; USEPA, November 2018
				BWa	Body Weight - adult	80	kg	USEPA, September 2011; USEPA, November 2018
				BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018
AT-C				Averaging Time (Cancer)	25550	days	USEPA, December 1989 (70 y x 365 d/y)	
AT-N				Averaging Time (Non-Cancer)	9490	days	USEPA, December 1989 (ED x 365 d/y)	
Child				Tap Water	IR-Wc	Ingestion Rate of Groundwater - child	0.78	L/day
		EFc	Exposure Frequency - child		350	day/yr	USEPA, March 1991; USEPA, November 2018	
	EDc	Exposure Duration - child	6		years	USEPA, March 1991; USEPA, November 2018		
	BWc	Body Weight - child	15		kg	USEPA, March 1991; USEPA, November 2018		
	AT-N	Averaging Time (Non-Cancer)	2190		days	USEPA, December 1989 (ED x 365 d/y)		

**Table 14**  
**Exposure Factors - Groundwater (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Groundwater

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Construction Worker	Adult	Groundwater	FA	Fraction Absorbed Water	Chemical-specific	unitless	USEPA, July 2004
				Kp	Dermal Permeability Coefficient	Chemical-specific	cm/hr	USEPA, July 2004
				SA	Body Area Available for Contact	3527	cm <sup>2</sup>	USEPA, September 2011; USEPA, November 2018 (1)
				tau-event	Lag Time per Event	Chemical-specific	hours/event	USEPA, July 2004
				t-event	Event Duration	4	hours/event	VDEQ, 2015
				B	Ratio of Kp of a Compound through the Stratum Corneum Relative to Its Kp across the Viable Epidermis	Chemical-specific	unitless	USEPA, July 2004
				EV	Event Frequency	1	event/day	USEPA, July 2004
				EF	Exposure Frequency	250	day/yr	USEPA, December 2002; USEPA, November 2018
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018
				CF	Conversion Factor	1000	cm <sup>3</sup> /L	--
				BW	Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018
				AT-C	Averaging Time, carcinogens	25,550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time, noncarcinogens	365	days	USEPA, December 1989 (ED x 365 d/y)
	Industrial Worker	Adult	Tap Water	FA	Fraction Absorbed Water	Chemical-specific	unitless	USEPA, July 2004
				Kp	Dermal Permeability Coefficient	Chemical-specific	cm/hr	USEPA, July 2004
				SA	Body Area Available for Contact	950	cm <sup>2</sup>	USEPA, September 2011; (2)
				tau-event	Lag Time per Event	Chemical-specific	hours/event	USEPA, July 2004
				t-event	Event Duration	0.71	hours/event	USEPA, September 2011; USEPA, November 2018 (3)
				B	Ratio of Kp of a Compound through the Stratum Corneum Relative to Its Kp across the Viable Epidermis	Chemical-specific	unitless	USEPA, July 2004
EV				Event Frequency	1	event/day	USEPA, July 2004	
EF				Exposure Frequency	250	day/yr	USEPA, March 1991; USEPA, November 2018	
ED				Exposure Duration	25	years	USEPA, March 1991; USEPA, November 2018	
CF				Conversion Factor	1000	cm <sup>3</sup> /L	--	
BW				Body Weight	80	kg	USEPA, September 2011; USEPA, November 2018	
AT-C				Averaging Time, carcinogens	25,550	days	USEPA, December 1989 (70 y x 365 d/y)	
AT-N				Averaging Time, noncarcinogens	9125	days	USEPA, December 1989 (ED x 365 d/y)	

**Table 14**  
**Exposure Factors - Groundwater (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Groundwater

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Resident	Adult	Tap Water	FA	Fraction Absorbed Water	chemical-specific	unitless	USEPA, July 2004
				Kp	Dermal Permeability Coefficient	chemical-specific	cm/hr	USEPA, July 2004
				SAA	Body Area Available for Contact - adult	20900	cm <sup>2</sup>	USEPA, September 2011; USEPA, April 2014 (4)
				SAC	Body Area Available for Contact - child	6378	cm <sup>2</sup>	USEPA, September 2011; USEPA, April 2014 (4)
				tau-event	Lag Time per Event	chemical-specific	hours/event	USEPA, July 2004
				t-eventa	Event Duration - adult	0.71	hours/event	USEPA, September 2011; USEPA, November 2018
				t-eventc	Event Duration - child	0.54	hours/event	USEPA, September 2011; USEPA, November 2018
				B	Ratio of Kp of a Compound through the Stratum Corneum Relative to Its Kp across the Viable Epidermis	chemical-specific	unitless	USEPA, July 2004
				EVa	Event Frequency - adult	1	event/day	USEPA, July 2004
				EVc	Event Frequency - child	1	event/day	USEPA, July 2004
				EFa	Exposure Frequency - adult	350	days/year	USEPA, March 1991; USEPA, November 2018
				EFc	Exposure Frequency - child	350	days/year	USEPA, March 1991; USEPA, November 2018
				EDa	Exposure Duration - adult	20	years	USEPA, November 2018
				EDc	Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018
				EDres	Exposure Duration - resident	26	years	USEPA, September 2011; USEPA, November 2018
				CF	Conversion Factor	1000	cm <sup>3</sup> /L	--
				BWa	Body Weight - adult	80	kg	USEPA, September 2011; USEPA, November 2018
				BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018
				AT-C	Averaging Time, carcinogens	25,550	days	USEPA, December 1989 (70 y x 365 d/y)
				AT-N	Averaging Time, noncarcinogens	9490	days	USEPA, December 1989 (ED x 365 d/y)

**Table 14**  
**Exposure Factors - Groundwater (Future - Oral and Dermal)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future
Medium: Groundwater
Exposure Medium: Groundwater

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Dermal	Resident	Child	Tap Water	FA	Fraction Absorbed Water	chemical-specific	unitless	USEPA, July 2004
				Kp	Dermal Permeability Coefficient	chemical-specific	cm/hr	USEPA, July 2004
				SAC	Body Area Available for Contact - child	6378	cm <sup>2</sup>	USEPA, September 2011; USEPA, April 2014 (4)
				tau-event	Lag Time per Event	chemical-specific	hours/event	USEPA, July 2004
				t-eventc	Event Duration - child	0.54	hours/event	USEPA, September 2011; USEPA, November 2018
				B	Ratio of Kp of a Compound through the Stratum Corneum Relative to Its Kp across the Viable Epidermis	chemical-specific	unitless	USEPA, July 2004
				EVc	Event Frequency - child	1	event/day	USEPA, July 2004
				EFc	Exposure Frequency - child	350	days/year	USEPA, March 1991; USEPA, November 2018
				EDc	Exposure Duration - child	6	years	USEPA, March 1991; USEPA, November 2018
				CF	Conversion Factor	1000	cm <sup>3</sup> /L	--
				BWc	Body Weight - child	15	kg	USEPA, March 1991; USEPA, November 2018
				AT-N	Averaging Time, noncarcinogens	2190	days	USEPA, December 1989 (ED x 365 d/y)

**Notes:**

- (1) Represents head, hands, and forearms.
- (2) Represents area of hands.
- (3) Adult resident t-event value was conservatively used for Industrial Worker.
- (4) Represents whole body.

USEPA, December 1989. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part A), Office of Emergency and Remedial Response. EPA/540/1-89/002.

USEPA, March 1991. Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors. Office of Solid Waste and Emergency Response. OSWER Directive 9285.6-03.

USEPA, December 2002. Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites. OSWER 9355.4-24.

USEPA, July 2004. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part E), Office of Emergency and Remedial Response. EPA/540/R99/005.

USEPA, September 2011. Exposure Factors Handbook: 2011 Edition. EPA/600/R-09/052F.

USEPA January 2014. Region 4 Human Health Risk Assessment Supplemental Guidance. Draft Final.

USEPA, April 2014. Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors. OSWER Directive 9200.1-120.

USEPA, November 2018. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

VDEQ, 2015. Virginia Department of Environmental Quality Voluntary Remediation Program, Risk Assessment Guidance, Section 3.3.2 Exposure Factors.

**Table 15**  
**Exposure Factors - Groundwater (Current/Future - Inhalation from Vapor Intrusion)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Current/Future
Medium:	Groundwater
Exposure Medium:	Air

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Inhalation	Resident <sup>(1)</sup>	Adult and Child	Indoor Air via Vapor Intrusion	ET	Exposure Time (Indoor Air)	24	hr/day	USEPA, April 2014
				EF	Exposure Frequency	350	day/yr	USEPA, December 1991; USEPA, April 2014
				ED	Exposure Duration	26	years	USEPA, September 2011; USEPA, April 2014
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
				AT-N	Averaging Time (Non-Cancer)	227,760	hours	ED x 365 d/yr x 24 hrs/day

**Notes:**

(1) Under current conditions, a resident exists only at Parcel H, which is immediately east of Parcel D. This resident lives within 100 feet of the VOC plume beneath Parcel D and will be evaluated for vapor intrusion using groundwater data collected at Parcel D.

USEPA, December 1991. Risk Assessment Guidance for Superfund, Volume I: Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals). EPA/540/R-92/003.

USEPA, September 2011. Exposure Factors Handbook: 2011 Edition. EPA/600/R-09/052F.

USEPA, April 2014. Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors. OSWER Directive 9200.1-120.



**Table 16**  
**Exposure Factors - Groundwater (Future - Inhalation from a Trench, Showering, and Vapor Intrusion)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Medium:	Groundwater
Exposure Medium:	Air

Exposure Route	Receptor Population	Receptor Age	Exposure Point	Parameter Code	Parameter Definition	Value	Units	Rationale/Reference
Inhalation	Construction Worker	Adult	Vapors from Volatilization (Trench)	ET	Exposure Time	4	hours/day	VDEQ, 2015
				EF	Exposure Frequency	250	day/yr	USEPA, December, 1991; USEPA, April 2014
				ED	Exposure Duration	1	years	USEPA, December 2002; USEPA, November 2018
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
				AT-N	Averaging Time (Non-Cancer)	8,760	hours	ED x 365 d/yr x 24 hrs/day
	Resident	Adult	Vapors from Volatilization (Showering)	K	Andelman Volatilization Factor	0.5	L/m3	USEPA, December, 1991
				ET	Exposure Time (Indoor Air)	0.71	hr/day	USEPA, April 2014
				EF	Exposure Frequency	350	day/yr	USEPA, July 2004
				ED	Exposure Duration	26	years	USEPA, April 2014
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
				AT-N	Averaging Time (Non-Cancer)	227,760	hours	ED x 365 d/yr x 24 hrs/day
	Industrial Worker	Adult	Indoor Air via Vapor Intrusion	ET	Exposure Time (Indoor Air)	8	hr/day	USEPA, April 2014
				EF	Exposure Frequency	250	day/yr	USEPA, December, 1991; USEPA, April 2014
				ED	Exposure Duration	25	years	USEPA, December, 1991; USEPA, April 2014
				AT-C	Averaging Time (Cancer)	613,200	hours	70 yr [lifetime]x 365 d/yr x 24 hrs/day
AT-N				Averaging Time (Non-Cancer)	219,000	hours	ED x 365 d/yr x 24 hrs/day	

**Notes:**

USEPA, December 1991. Risk Assessment Guidance for Superfund, Volume I: Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals). EPA/540/R-92/003.

USEPA, December 2002. Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites. OSWER 9355.4-24.

USEPA, July 2004. Risk Assessment Guidance for Superfund - Volume I - Human Health Evaluation Manual (Part E), Office of Emergency and Remedial Response. EPA/540/R99/005.

USEPA, April 2014. Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors. OSWER Directive 9200.1-120.

USEPA, November 2018. Regional Screening Table User's Guide. Table 1. Standard Default Factors.

VDEQ 2015. Virginia Department of Environmental Quality Voluntary Remediation Program, Risk Assessment Guidance, Section 3.3.2 Exposure Factors.

**Table 17**  
**Toxicity Factors**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Analyte	SFo (mg/kg-day) <sup>-1</sup>	Source <sup>(1)</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	Source <sup>(1)</sup>	Chronic				Subchronic				GIABS <sup>(2)</sup>
					RfDo mg/kg-day	Source <sup>(1)</sup>	RfCi ug/m <sup>3</sup>	Source <sup>(1)</sup>	RfDo mg/kg-day	Source <sup>(1)</sup>	RfCi ug/m <sup>3</sup>	Source <sup>(1)</sup>	
cis-1,2-Dichloroethene	ND	I	ND	I	2.00E-03	I	ND	I	2.00E-02	E	ND	E	1
Tetrachloroethene	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E+01	I	1.00E-01	E	4.00E+01	E	1
Trichloroethylene	4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E+00	I	5.00E-04	E	2.00E+00	E	1
Vinyl chloride	7.20E-01	I	4.40E-06	I	3.00E-03	I	1.00E+02	I	3.00E-03	E	7.67E+01	E	1

**Notes:**

(1) Sources for toxicity factors is as follows:

I - USEPA Integrated Risk Information System (IRIS)

E - USEPA's RSL Calculator

(2) Source of GIABS values is USEPA's Risk Assessment Guidance for Superfund Volume I: Human Health Evaluation Manual

(Part E, Supplemental Guidance for Dermal Risk Assessment), Final (July 2004).

GIABS - Gastrointestinal Absorption Factor

IUR - Inhalation Unit Rate

ND - No Data

RfCi - Reference Concentration (Inhalation)

RfDo - Reference Dose (Oral)

SFo - Slope Factor (Oral)

**Table 18**  
**Summary of Risks and Hazards**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Chemical	Cancer Risk	Noncancer Hazard
<b>PARCEL A</b>		
<b>Current and Future Trespasser</b>		
Surface Soil	2.E-07	0.1
Total	2.E-07	0.1
<b>Future Construction Worker</b>		
Surface Soil	6.E-07	4
Subsurface Soil	4.E-08	0.2
Groundwater	4.E-05	263
Total	4.E-05	267
<b>Future Industrial Worker</b>		
Surface Soil	3.E-06	0.7
Subsurface Soil	7.E-09	0.001
Groundwater	9.E-05	21
Total	1.E-04	21
<b>Future Resident Adult</b>		
Surface Soil	1.E-05	3
Subsurface Soil	6.E-08	0.004
Groundwater	7.E-04	133
Total	7.E-04	136
<b>Future Resident Child</b>		
Surface Soil	NA	4
Subsurface Soil	NA	0.04
Groundwater	NA	196
Total	NA	200
<b>PARCEL B</b>		
<b>Current and Future Trespasser</b>		
Surface Soil (Not located in soil source area)	—	—
<b>Future Construction Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	5.E-07	4
Total	5.E-07	4
<b>Future Industrial Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	1.E-06	0.2
Total	1.E-06	0.2
<b>Future Resident Adult</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	2.E-05	1
Total	2.E-05	1
<b>Future Resident Child</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	NA	1
Total	NA	1

**Table 18**  
**Summary of Risks and Hazards**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Chemical	Cancer Risk	Noncancer Hazard
<b>PARCEL C</b>		
<b>Current and Future Trespasser</b>		
Surface Soil (Not located in soil source area)	—	—
<b>Future Construction Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	2.E-07	2
Total	2.E-07	2
<b>Future Industrial Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	7.E-07	0.09
Total	7.E-07	0.09
<b>Future Resident Adult</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	1.E-05	0.5
Total	1.E-05	0.5
<b>Future Resident Child</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	NA	0.6
Total	NA	0.6
<b>PARCEL D</b>		
<b>Current and Future Trespasser</b>		
Surface Soil (Not located in soil source area)	—	—
<b>Future Construction Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	1.E-06	8
Total	1.E-06	8
<b>Future Industrial Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	3.E-06	0.4
Total	3.E-06	0.4
<b>Future Resident Adult</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	4.E-05	2
Total	4.E-05	2
<b>Future Resident Child</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater	NA	3
Total	NA	3

**Table 18**  
**Summary of Risks and Hazards**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Chemical	Cancer Risk	Noncancer Hazard
<b>PARCEL E</b>		
<b>Current Industrial Worker</b>		
Surface Soil (No COCs Identified) <sup>(2)</sup>	—	—
Groundwater (No COCs Identified) <sup>(2)</sup>	—	—
<b>Current and Future Trespasser</b>		
Surface Soil (No COPCs identified)	—	—
<b>Future Construction Worker</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	7.E-06	60
Total	7.E-06	60
<b>Future Industrial Worker</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	2.E-05	3
Total	2.E-05	3
<b>Future Resident Adult</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	2.E-04	19
Total	2.E-04	19
<b>Future Resident Child</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	NA	24
Total	NA	24
<b>PARCEL F</b>		
<b>Current and Future Trespasser</b>		
Surface Soil (No COPCs identified)	—	—
<b>Future Construction Worker</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	1.E-05	83
Total	1.E-05	83
<b>Future Industrial Worker</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	3.E-05	5
Total	3.E-05	5
<b>Future Resident Adult</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	4.E-04	27
Total	4.E-04	27
<b>Future Resident Child</b>		
Surface Soil (No COPCs identified)	—	—
Subsurface Soil (No COPCs identified)	—	—
Groundwater	NA	36
Total	NA	36

**Table 18**  
**Summary of Risks and Hazards**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Chemical	Cancer Risk	Noncancer Hazard
<b>PARCEL G</b>		
<b>Current and Future Trespasser</b>		
Surface Soil (Not located in soil source area)	—	—
<b>Future Construction Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater (No COPCs identified)	—	—
<b>Future Industrial Worker</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater (No COPCs identified)	—	—
<b>Future Resident Adult</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater (No COPCs identified)	—	—
<b>Future Resident Child</b>		
Surface Soil (Not located in soil source area)	—	—
Subsurface Soil (Not located in soil source area)	—	—
Groundwater (No COPCs identified)	—	—
<b>PARCEL H <sup>(1)</sup></b>		
<b>Current and Future Resident Adult</b>		
Groundwater	1.E-06	0.3
Total	1.E-06	0.3
<b>Current and Future Resident Child</b>		
Groundwater	NA	0.3
Total	NA	0.3

**Notes:**

- (1) A residence currently exists on Parcel H, immediately east of Parcel D. The residence on Parcel H is within 100 feet of the VOC plume beneath Parcel D; therefore, it was evaluated for vapor intrusion using groundwater data identified in the core of the plume at Parcel D (Locations OMS-28-GW46-16, -GW64-16, and -GW75-29). Exposure and risk for a future resident on Parcel H were assumed to be the same as under current conditions. There is no current resident on Parcel D.
- (2) The current industrial worker was not quantitatively evaluated at Parcel E; no chemicals of potential concern were identified in surface soil and no groundwater plume is within 100 feet of the building currently used by industrial workers.

A current construction worker is not evaluated for any parcel.

NA - Not Applicable

**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL A</b>									
<b>Current and Future Trespasser</b>									
No COCs Identified									
<b>Future Construction Worker</b>									
Surface Soil (Ingestion, Inhalation)									
<b>Tetrachloroethene</b>	329	mg/kg	571	5710	57100	8.5	85.3	255.9	NA
Groundwater (Ingestion, Dermal, Inhalation)									
<b>Tetrachloroethene</b>	12235	ug/L	172	1720	17200	2.7	27	81	5
<b>Trichloroethene</b>	18	ug/L	10.1	101	1010	0.12	1.2	3.6	5
<b>Future Industrial Worker</b>									
Surface Soil (Ingestion, Inhalation)									
<b>Tetrachloroethene</b>	329	mg/kg	126	1260	12600	47.3	473	1419	NA
Groundwater (Ingestion, Dermal, Inhalation)									
<b>Tetrachloroethene</b>	12235	ug/L	73	730	7300	33	327	981	5
<b>Trichloroethene</b>	18	ug/L	3.5	35	350	2.86	28.6	86.0	5
Groundwater (Vapor Intrusion)									
<b>Tetrachloroethene</b>	13,751	ug/L	2127	21270	212700	789.8	7898	23694	NA
<b>Future Resident Adult <sup>(9)</sup></b>									
Surface Soil (Ingestion, Inhalation)									
<b>Tetrachloroethene</b>	329	mg/kg	27.6	276	2760	11.4	114	342	NA
Groundwater (Ingestion, Dermal, Inhalation)									
<b>Tetrachloroethene</b>	12235	ug/L	5.7	57	570	2.5	25.15	75.5	5
<b>Trichloroethene</b>	18	ug/L	0.25	2.5	25	0.16	1.6	4.8	5
Groundwater (Vapor Intrusion)									
<b>Tetrachloroethene</b>	13,751	ug/L	61.5	615	6150	23.7	237	711	NA
<b>Trichloroethene <sup>(5)</sup></b>	19.84	ug/L	3.6	35.5	355	NC	NC	NC	NA
<b>Future Resident Child</b>									
Surface Soil (Ingestion, Inhalation)									
<b>Tetrachloroethene</b>	329	mg/kg	—	—	—	9.3	93	279	NA
Groundwater (Ingestion, Dermal)									
<b>Tetrachloroethene</b>	12235	ug/L	—	—	—	3.9	39	117	5
<b>Trichloroethene</b>	18	ug/L	—	—	—	0.44	4.4	13.2	5
Groundwater (Vapor Intrusion)									
<b>Tetrachloroethene <sup>(6)</sup></b>	13,751	ug/L	62	615	6150	24	237	711	NA
<b>Trichloroethene <sup>(5,6)</sup></b>	19.84	ug/L	3.6	35.5	355	NC	NC	NC	NA

**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL B</b>									
<b>Current and Future Trespasser</b> No COCs Identified									
<b>Future Construction Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	10	ug/L	20.1	201	2010	<b>0.24</b>	<b>2.4</b>	<b>7.2</b>	<b>5</b>
<b>Future Industrial Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	10	ug/L	<b>7</b>	70	700	<b>5.7</b>	57	171	<b>5</b>
<b>Future Resident Adult <sup>(9)</sup></b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	10	ug/L	<b>0.5</b>	<b>5</b>	50	<b>0.32</b>	<b>3.2</b>	<b>9.7</b>	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Trichloroethene <sup>(5)</sup></b>	10	ug/L	<b>7.1</b>	71	710	NC	NC	NC	NA
<b>Future Resident Child</b> Groundwater (Ingestion, Dermal)									
<b>Trichloroethene</b>	10	ug/L	—	—	—	<b>0.87</b>	<b>8.7</b>	26.1	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Trichloroethene <sup>(5, 6)</sup></b>	10	ug/L	<b>7.1</b>	71	710	NC	NC	NC	NA



**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL C</b>									
Current and Future Trespasser No COCs Identified									
Future Construction Worker Groundwater (Ingestion, Dermal, Inhalation) Trichloroethene	4	ug/L	20.1	201	2010	0.24	2.4	7.2	5
Future Industrial Worker No COCs Identified									
Future Resident Adult <sup>(9)</sup> Groundwater (Ingestion, Dermal, Inhalation) Trichloroethene	4	ug/L	0.5	5	50	0.32	3.2	9.7	5
Future Resident Child No COCs Identified									
<b>PARCEL D</b>									
Current and Future Trespasser No COCs Identified									
Future Construction Worker Groundwater (Ingestion, Dermal, Inhalation) Trichloroethene	20	ug/L	20.1	201	2010	0.24	2.4	7.2	5
Future Industrial Worker Groundwater (Ingestion, Dermal, Inhalation) Trichloroethene	20	ug/L	7	70	700	5.7	57	171	5
Future Resident Adult <sup>(9)</sup> Groundwater (Ingestion, Dermal, Inhalation) Trichloroethene	20	ug/L	0.5	5	50	0.32	3.2	9.7	5
Groundwater (Vapor Intrusion) Trichloroethene <sup>(5)</sup>	9.02	ug/L	7.1	71	710	NC	NC	NC	NA
Future Resident Child Groundwater (Ingestion, Dermal) Trichloroethene	20	ug/L	—	—	—	0.87	8.7	26.1	5
Groundwater (Vapor Intrusion) Trichloroethene <sup>(5, 6)</sup>	9.02	ug/L	7.1	71	710	NC	NC	NC	NA

**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL E</b>									
<b>Current Industrial Worker</b> No COCs Identified <sup>(7)</sup>									
<b>Current and Future Trespasser</b> No COCs Identified									
<b>Future Construction Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	145	ug/L	<b>20.1</b>	201	2010	<b>0.24</b>	<b>2.4</b>	<b>7.2</b>	<b>5</b>
<b>Future Industrial Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	145	ug/L	<b>7</b>	<b>70</b>	700	<b>5.7</b>	<b>57</b>	171	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Trichloroethene</b> <sup>(5)</sup>	230.4	ug/L	<b>220</b>	2204	22044	NC	NC	NC	NA
<b>Future Resident Adult</b> <sup>(9)</sup> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Trichloroethene</b>	145	ug/L	<b>0.25</b>	<b>2.5</b>	<b>25</b>	<b>0.16</b>	<b>1.6</b>	<b>4.8</b>	<b>5</b>
<b>Vinyl Chloride</b>	0.03	ug/L	<b>0.0094</b>	0.094	0.94	3.2	32.2	96.5	2
Groundwater (Vapor Intrusion)									
<b>Trichloroethene</b> <sup>(5)</sup>	230.4	ug/L	<b>6.83</b>	<b>68.32</b>	683.19	NC	NC	NC	NA
<b>Future Resident Child</b> Groundwater (Ingestion, Dermal)									
<b>Trichloroethene</b>	145	ug/L	—	—	—	<b>0.87</b>	<b>8.7</b>	<b>26.1</b>	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Trichloroethene</b> <sup>(5, 6)</sup>	230.4	ug/L	<b>6.83</b>	<b>68.32</b>	683.19	NC	NC	NC	NA

**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL F</b>									
<b>Current and Future Trespasser</b> No COCs Identified									
<b>Future Construction Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Tetrachloroethene</b>	190	ug/L	<b>172</b>	1720	17200	<b>2.7</b>	<b>27</b>	<b>81</b>	<b>5</b>
<b>Trichloroethene</b>	189	ug/L	<b>10.1</b>	<b>101</b>	1010	<b>0.12</b>	<b>1.2</b>	<b>3.6</b>	<b>5</b>
<b>Future Industrial Worker</b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>Tetrachloroethene</b>	190	ug/L	<b>73</b>	730	7300	<b>32.7</b>	327	981	<b>5</b>
<b>Trichloroethene</b>	189	ug/L	<b>3.5</b>	<b>35</b>	350	<b>2.86</b>	<b>28.6</b>	<b>85.8</b>	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Trichloroethene <sup>(5)</sup></b>	247.3	ug/L	<b>216</b>	2160	21600	NC	NC	NC	NA
<b>Future Resident Adult <sup>(9)</sup></b> Groundwater (Ingestion, Dermal, Inhalation)									
<b>cis-1,2-Dichloroethene</b>	89.93	ug/L	—	—	—	<b>1.49</b>	<b>14.9</b>	<b>44.6</b>	<b>70</b>
<b>Tetrachloroethene</b>	190.1	ug/L	<b>3</b>	<b>28.3</b>	283	<b>1.26</b>	<b>12.6</b>	<b>37.7</b>	<b>5</b>
<b>Trichloroethene</b>	189.3	ug/L	<b>0.12</b>	<b>1.2</b>	<b>12</b>	<b>0.081</b>	<b>0.81</b>	<b>2.42</b>	<b>5</b>
<b>Vinyl chloride</b>	0.2	ug/L	<b>0.0047</b>	<b>0.047</b>	0.47	1.6	16.1	48.2	2
Groundwater (Vapor Intrusion)									
<b>Tetrachloroethene</b>	251.1	ug/L	<b>58</b>	580	5800	<b>22.3</b>	<b>223</b>	669	NA
<b>Trichloroethene <sup>(5)</sup></b>	247.3	ug/L	<b>3.35</b>	<b>33.5</b>	335	NC	NC	NC	NA
<b>Future Resident Child</b> Groundwater (Ingestion, Dermal)									
<b>cis-1,2-Dichloroethene</b>	89.93	ug/L	—	—	—	<b>1.2</b>	<b>12</b>	<b>36</b>	<b>70</b>
<b>Tetrachloroethene</b>	190.1	ug/L	—	—	—	<b>2.6</b>	<b>26</b>	<b>78</b>	<b>5</b>
<b>Trichloroethene</b>	189.3	ug/L	—	—	—	<b>0.29</b>	<b>2.9</b>	<b>8.7</b>	<b>5</b>
Groundwater (Vapor Intrusion)									
<b>Tetrachloroethene <sup>(6)</sup></b>	251.1	ug/L	<b>58</b>	580	5800	<b>22.3</b>	<b>223</b>	669	NA
<b>Trichloroethene <sup>(5,6)</sup></b>	247.3	ug/L	<b>3.35</b>	<b>33.5</b>	335	NC	NC	NC	NA

**Table 19**  
**Site Concentrations and Site-Specific Screening Levels for COCs**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parcel/Receptor/Pathway/COC <sup>(1)</sup>	Site Concentration <sup>(2)</sup>	Units	Carcinogenic SSSLs Based on the Following Risk Levels <sup>(3)</sup>			Noncarcinogenic SSSLs Based on the Following Hazard Quotients <sup>(3)</sup>			MCL <sup>(4)</sup>
			10 <sup>-6</sup>	10 <sup>-5</sup>	10 <sup>-4</sup>	0.1	1	3	
<b>PARCEL G</b>									
<b>Current and Future Trespasser</b> No COCs Identified									
<b>Future Construction Worker</b> No COCs Identified									
<b>Future Industrial Worker</b> No COCs Identified									
<b>Future Resident Adult</b> <sup>(9)</sup> No COCs Identified									
<b>Future Resident Child</b> No COCs Identified									
<b>PARCEL H</b>									
<b>Current and Future Resident Adult</b> <sup>(8,9)</sup> Groundwater (Vapor Intrusion)									
<b>Trichloroethene</b> <sup>(5)</sup>	9.02	ug/L	<b>7.1</b>	71	710	NC	NC	NC	NA
<b>Current and Future Resident Child</b> <sup>(8)</sup> Groundwater (Vapor Intrusion)									
<b>Trichloroethene</b> <sup>(5,6)</sup>	9.02	ug/L	<b>7.1</b>	71	710	NC	NC	NC	NA

**Notes:**

- (1) COCs were identified as those chemicals with a significant contribution to a pathway in a use scenario for a receptor that either (a) exceeds a  $1 \times 10^{-4}$  cumulative site cancer risk or (b) exceeds a non-carcinogenic HI of 1. No Subsurface Soil COCs were identified. See Risk and Hazard tables in Appendix E.
- (2) Site concentration is the exposure point concentration shown in Tables 6 through 9.
- (3) SSSLs were derived as follows:  
 For exposure to soil for the Construction Worker and Industrial Worker, and for exposure to soil and groundwater for the Resident Adult, SSSLs were calculated using USEPA's RSL Calculator (output included in Appendix G).  
 For exposure to soil for the Trespasser and Resident Child, and for exposure to groundwater for the Construction Worker, Industrial Worker, and Resident Child, SSSLs were calculated using standard risk equations (shown in Appendix G).  
 For exposure to groundwater via vapor intrusion for the Industrial Worker, Resident Adult, and Resident Child — SSSLs were identified as the "target groundwater concentration" calculated by the Johnson and Ettinger Model (output included in Appendix F.2).
- (4) MCL is from the Drinking Water Standards and Health Advisories Tables (USEPA, November 2018).  
 NA indicates an MCL is not applicable for this medium.
- (5) The Johnson and Ettinger Model does not display noncarcinogenic SSSLs for this COC.
- (6) While the Johnson and Ettinger Model calculated carcinogenic SSSLs for this COC, risk is not identified for a child receptor in risk evaluations.
- (7) The current industrial worker was not quantitatively evaluated at Parcel E; no chemicals of potential concern were identified in surface soil and no groundwater plume is within 100 feet of the building currently used by industrial workers.
- (8) A residence currently exists on Parcel H, immediately east of Parcel D. The residence on Parcel H is within 100 feet of the VOC plume beneath Parcel D; therefore, it was evaluated for vapor intrusion using groundwater data identified in the core of the plume at Parcel D (Locations OMS-28-GW46-16, -GW64-16, and -GW75-29). Exposure and risk for a future resident on Parcel H were assumed to be the same as under current conditions. There is no current resident on Parcel D.
- (9) RSL Calculator output for the Resident Adult consists of only the adult values; it does not include the child values.  
 When more than one COC was identified for a given receptor's pathway, the SSSL for each COC was divided by the number of COCs for that receptor's pathway (Section 6.7.2 of ADEM, February 2017).  
 COCs in bold indicate the site concentration exceeds one or more SSSLs or the MCL. The SSSLs and MCL exceeded are also bolded.  
 A current construction worker is not evaluated for any parcel.

COC - chemical of concern  
 MCL - maximum contaminant level  
 mg/kg - milligrams per kilogram (parts per million)  
 NC - not calculated  
 SSSL - site-specific screening level  
 ug/L - micrograms per liter (parts per billion)

**Sources:**

ADEM, February 2017. Alabama Risk-Based Corrective Action Guidance Manual, Revision 3.0.  
 USEPA, November 2018. Regional Screening Levels (RSLs) Summary Table

**Table 20**  
**Identification of Preliminary COPECs in Surface Soil**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Chemical	Frequency of Detection	Units	Minimum Detection Limit	Maximum Detection Limit	Minimum Concentration (Qualifier)	Maximum Concentration (Qualifier)	Maximum Concentration Sample Designation	EPA Region 4 Ecological Screening Value <sup>(1)</sup>	Maximum Hazard Quotient (HQ) <sup>(2)</sup>	Preliminary COPEC (Yes/No) / Basis <sup>(3)</sup>
2-Butanone	1 / 3	mg/kg	0.000395	3.07	0.0043 <i>JJ</i>	0.0043 <i>JJ</i>	OMS-28-SB14-1	1	0.004	No C
4-Methyl-2-pentanone	1 / 3	mg/kg	0.000197	1.54	0.00139 <i>JJ</i>	0.00139 <i>JJ</i>	OMS-28-SB14-1	0.36	0.004	No C
Acetone	2 / 3	mg/kg	0.000395	3.07	0.00437 <i>JJ</i>	0.083	OMS-28-SB14-1	1.2	0.07	No C
Benzene	1 / 3	mg/kg	0.000197	1.54	0.000499 <i>JJ</i>	0.000499 <i>JJ</i>	OMS-28-SB04-1	0.12	0.004	No C
Cyclohexane	1 / 3	mg/kg	0.000197	1.54	0.000698 <i>JJ</i>	0.000698 <i>JJ</i>	OMS-28-SB04-1	0.007	0.1	No C
Methylcyclohexane	1 / 3	mg/kg	0.000197	1.54	0.00143 <i>JJ</i>	0.00143 <i>JJ</i>	OMS-28-SB04-1	0.007	0.2	No C
Methylene chloride	2 / 3	mg/kg	0.00079	6.14	0.00192 <i>JJ</i>	0.00314 <i>JJ</i>	OMS-28-SB04-1	0.21	0.01	No C
<b>Tetrachloroethene</b>	<b>9 / 31</b>	<b>mg/kg</b>	<b>0.000395</b>	<b>3.07</b>	<b>0.0011587 <i>JJ</i></b>	<b>329</b>	<b>OMS-28-SB24-1</b>	<b>0.06</b>	<b>5483</b>	<b>Yes F</b>
Toluene	1 / 3	mg/kg	0.000197	1.54	0.00137 <i>JJ</i>	0.00137 <i>JJ</i>	OMS-28-SB04-1	0.15	0.009	No C
Trichloroethene	3 / 31	mg/kg	0.0006	1.54	0.0034442 <i>JJ</i>	0.0137143 <i>JJ</i>	OMS-28-SB29-1	0.06	0.2	No C
Xylenes (total)	1 / 3	mg/kg	0.000395	3.07	0.000862 <i>JJ</i>	0.000862 <i>JJ</i>	OMS-28-SB04-1	0.1	0.009	No C

**Notes:**

(1) Screening value is the Soil Ecological Screening Value (ESV) from Region 4 Ecological Risk Assessment Supplemental Guidance (USEPA, March 2018).

Note: The ESV for 2-hexanone was used as a surrogate for 4-methyl-2-pentanone.

The ESV for hexane was used as a surrogate for cyclohexane and methylcyclohexane.

(2) Maximum HQ = maximum concentration/ESV. For non-detects, one-half the maximum detection limit is used for the concentration.

(3) Basis for Identification as a Preliminary COPEC:

Not Identified as a Preliminary COPEC

A - One-half the maximum detection limit is less than ESV for a chemical not detected in any sample.

B - Chemical lacks an ESV and was not detected in any sample.

C - Maximum detected concentration is less than ESV.

D - Chemical is a member of a class of compounds and the total concentration is screened against an ESV for the total compounds in that class.

Identified as a Preliminary COPEC

E - One-half the maximum detection limit equals or exceeds the ESV for a chemical not detected in any sample.

F - Maximum detected concentration equals or exceeds the ESV.

G - Chemical was detected and no ESV was available.

**Bold font** indicates selection as a Preliminary COPEC.

**Definitions:**

ESV - Ecological Screening Value

NC - Not calculated

NSV - No screening value is available

**Table 21**  
**Refinement Screening for Birds and Mammals (Surface Soil)**  
**Ecological Risk Assessment**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Detected Preliminary COPEC <sup>(1)</sup>	Maximum Concentration	95% UCL Concentration <sup>(2)</sup>	Units	Frequency of Detection	Background Screening Value (BSV) <sup>(3)</sup>	Frequency Exceeding BSV	Refinement Screening Value (RSV) <sup>(4)</sup>	RSV (Source) <sup>(4)</sup>	Hazard Quotients (HQs) <sup>(5)</sup>				Retained as a Refined COPEC?	Reason for COPEC Selection or Deletion <sup>(6)</sup>
									Max HQ	Max HQ > 1?	95% UCL HQ	95% UCL HQ > 1		
<u>SVOCs</u>														
<b>Tetrachloroethene</b>	329	--	mg/kg	9 / 31	--	--	0.18	(a)	1,828	Yes	--	--	Yes	ARSV <sup>(7)</sup>

**Notes:**

- (1) Detected preliminary COPECs identified on Table 20. Chemicals in **bold** initially identified as refined COPECs.
- (2) The 95% UCL concentration (572 mg/kg) and its distribution are shown in HHRA Table 6. Because the 95% UCL is higher than the maximum detected concentration, the maximum was used as the exposure point concentration. (The arithmetic mean concentration of PCE in Parcel A surface soil is 54 mg/kg.)
- (3) Background value is not available.
- (4) RSV is the lower of the Avian and Mammalian values from Table 3 in USEPA 2018 (Region 4 Ecological Risk Assessment Supplemental Guidance, March 2018 Update). There is no avian RSV for PCE; the mammalian RSV is from the following original source:
  - (a) Los Alamos National Laboratory (LANL) 2017. ECORISK Database Release 4.1. September. <http://www.lanl.gov/environment/protection/eco-risk-assessment.php>
- (5) Max HQ or 95% UCL HQ = Maximum or 95% UCL concentration / RSV.
- (6) Reasons for COPEC Selection or Deletion:
  - ARSV = Above refinement screening value: 95% UCL HQ ≥ 1 and maximum concentration > the background value (if available).
  - BRSV = Below refinement screening value: 95% UCL HQ (or if not available, Max HQ) < 1.
  - EN = Essential nutrient: naturally occurring element very low in toxicity, and concentrations not highly elevated.
  - IFD = Infrequently detected: frequency of detection <5%, not detected in other media or at high concentrations, and not expected to occur.
- (7) All five samples with exceedances of the RSV were located in Parcel A.

-- = Not available or not applicable

95% UCL = 95 percent upper confidence limit on the mean


COPEC = chemical of potential ecological concern

**FIGURES**





**Legend**  
 [Outline] County  
 [Blue Area] Waterbodies




**AECOM**  
 10 Patewood Drive, Building 6, Suite 500  
 Greenville, SC 29615  
 T: (864) 234-3000 F: (864) 234-3069

**Facility Location Map**  
 Army National Guard OMS #28  
 Mobile, Alabama


PROJECT NO. 60439687	DRAWN BY: TEG	DATE: 8/27/2018	<b>Figure 1</b>
-------------------------	------------------	--------------------	-----------------



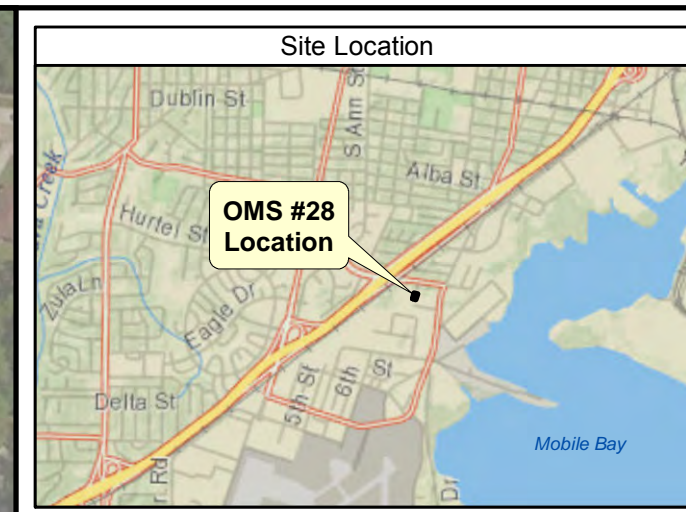

- Legend**
- +— Railroad
  - - - - - Approximate Ditch Orientation
  - Approximate Ditch Orientation Flow Direction
  - × - - - - Fenceline
  - Parcel Boundary

Note:  
Wells MW-10 and MW-11 were abandoned in 2008 at the property owner's request and have not been replaced.




**AECOM**  
10 Patewood Drive, Building 6, Suite 500  
Greenville, SC 29615  
T: (864) 234-3000 F: (864) 234-3069

**Facility Site Location Map**  
Army National Guard OMS #28  
Mobile, Alabama


PROJECT NO. 60439687	DRAWN BY: TEG	DATE: 8/27/2018	<b>Figure 2</b>
-------------------------	------------------	--------------------	-----------------



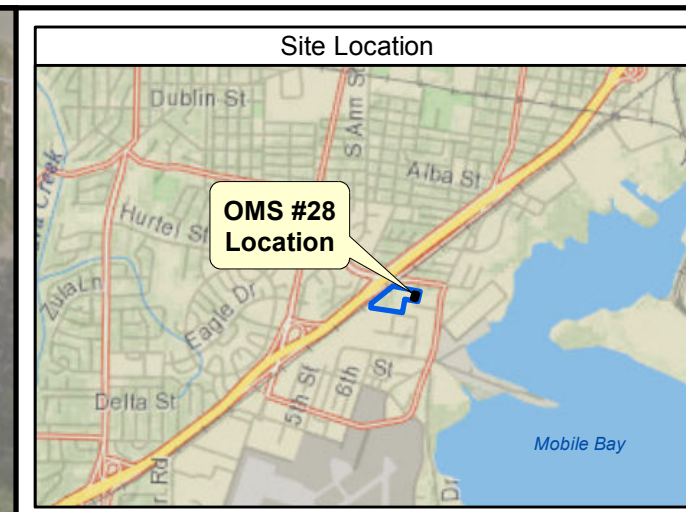

- Legend**
- ◆ Shallow Monitoring Well Location
  - ◆ Deep Monitoring Well Location
  - Groundwater Sample Location
  - Soil Boring Location
  - × — Fenceline
  - Railroad
  - ▭ Parcel Boundary
  - ▭ Parcel Designation (A - H)

**Note:**  
 - Some locations were sampled on multiple dates and at multiple depths.  
 - Table 1 contains a list of locations, depths, and dates sampled.




<b>AECOM</b>	10 Patewood Drive, Building 6, Suite 500 Greenville, SC 29615 T: (864) 234-3000 F: (864) 234-3069
--------------	---

**Sample Locations**

Army National Guard OMS #28  
Mobile, Alabama

PROJECT NO. 60439687	DRAWN BY: TEG	DATE: 12/12/2018	<b>Figure 3</b>
-------------------------	------------------	---------------------	-----------------



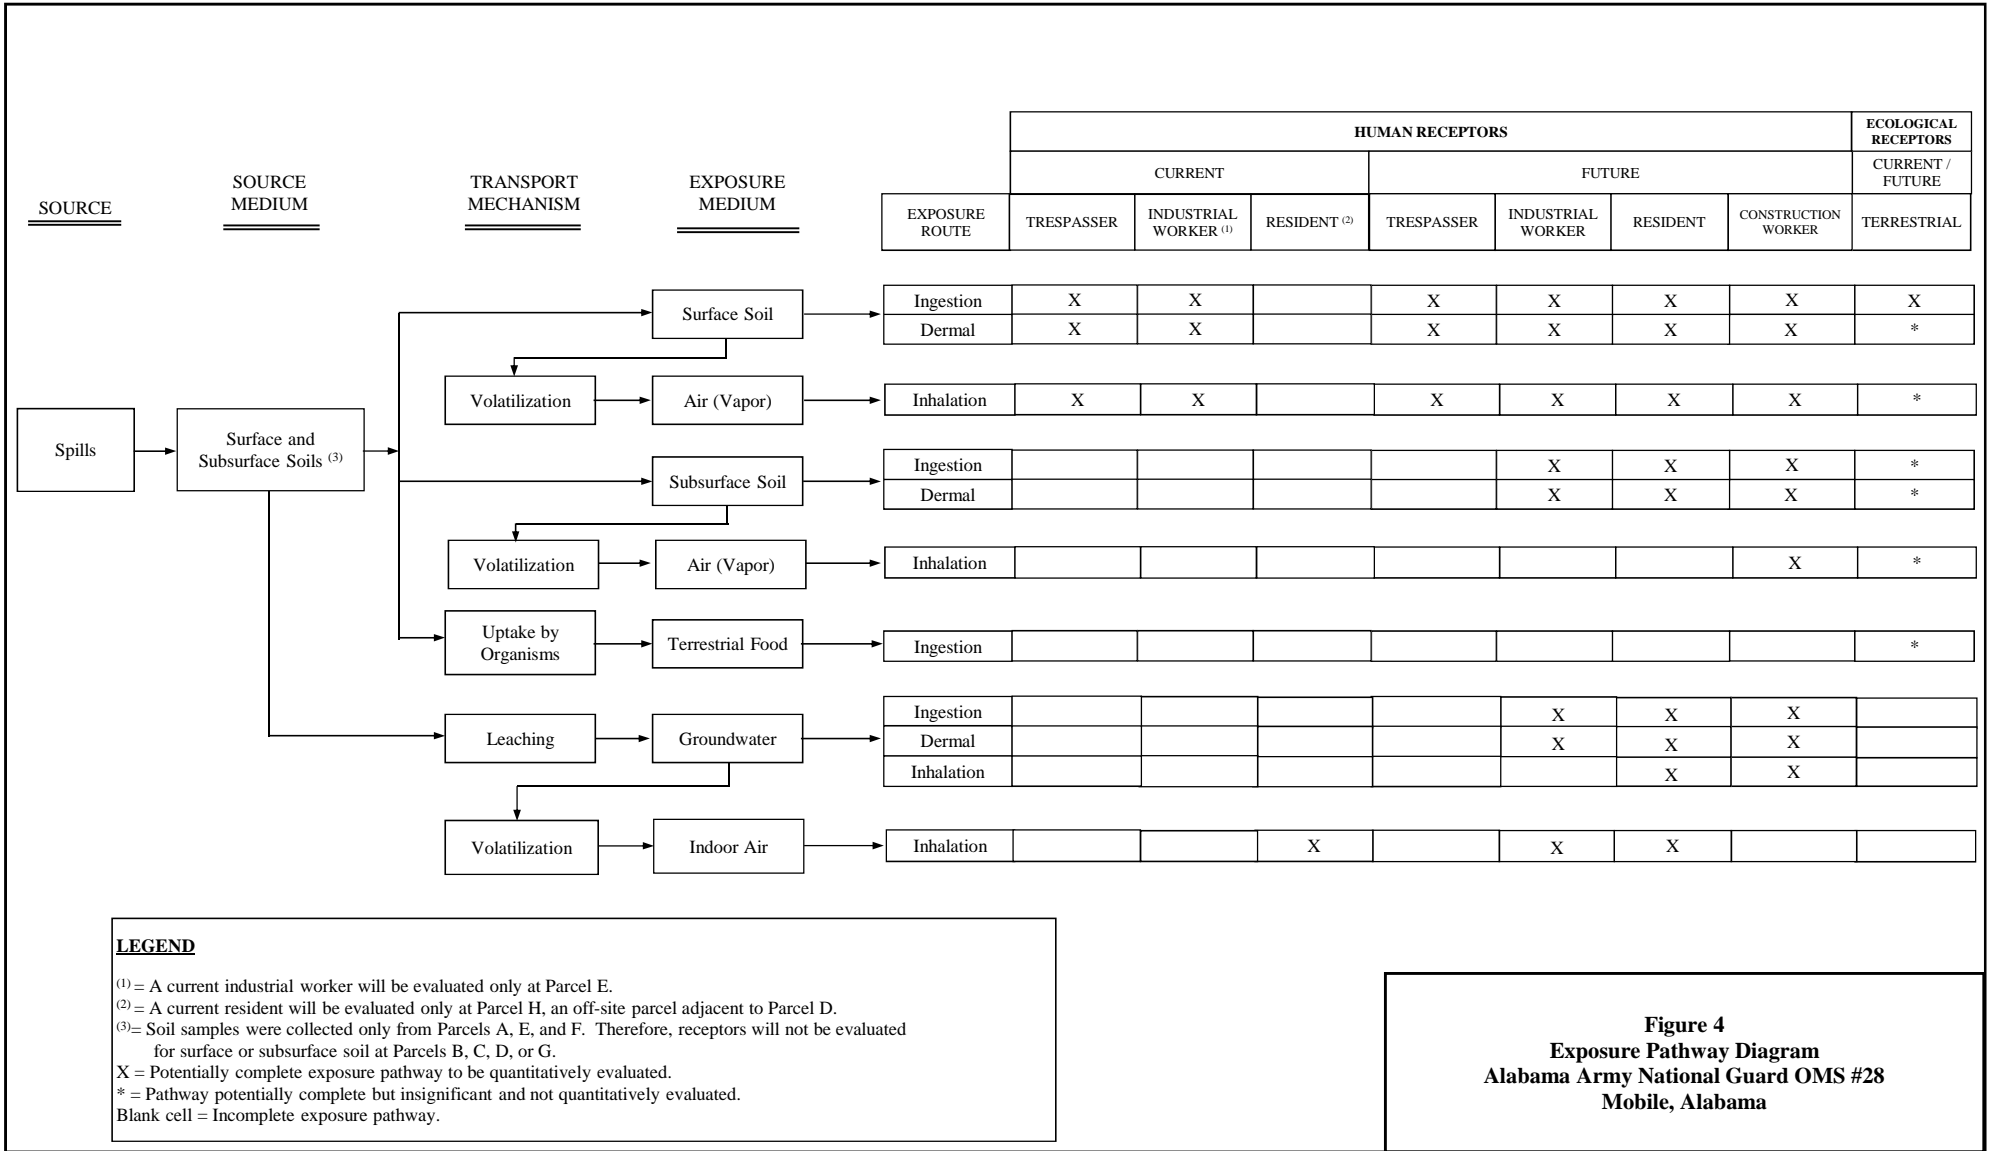


**LEGEND**

<sup>(1)</sup> = A current industrial worker will be evaluated only at Parcel E.  
<sup>(2)</sup> = A current resident will be evaluated only at Parcel H, an off-site parcel adjacent to Parcel D.  
<sup>(3)</sup> = Soil samples were collected only from Parcels A, E, and F. Therefore, receptors will not be evaluated for surface or subsurface soil at Parcels B, C, D, or G.  
X = Potentially complete exposure pathway to be quantitatively evaluated.  
\* = Pathway potentially complete but insignificant and not quantitatively evaluated.  
Blank cell = Incomplete exposure pathway.

**Figure 4**  
**Exposure Pathway Diagram**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**



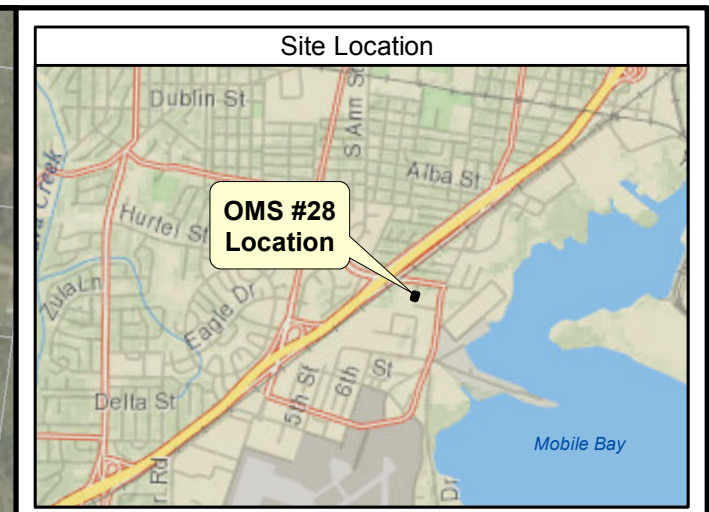


**Legend**

- ◆ Surficial Monitoring Well Locations
- Discrete Groundwater Sample Locations
- Approximate Extent of PCE and TCE Exceedance of the MCL (5 µg/L) in the Lower Surficial
- Approximate Extent of PCE and TCE Exceedance of the MCL (5 µg/L) in the Upper/Middle Surficial
- Apparent Groundwater Flow Direction - May 2017
- × - Fenceline
- Railroad
- Approximate Ditch Orientation
- Approximate Ditch Orientation Flow Direction
- Parcel Boundary
- Elevated groundwater concentration within the core of the parcel-specific plume

Locations include:

<u>Parcel A</u>	<u>Parcel E</u>
GW19	GW32
GW22	GW85
GW23	GW86
GW24	GW87
GW39	
GW40	<u>Parcel F</u>
	OMS-28-5
<u>Parcel B</u>	GW18
GW43	GW20
	GW21
<u>Parcel C</u>	GW51
GW44	
<u>Parcel D</u>	
GW46	
GW64	
GW75	



**AECOM**

10 Patewood Drive, Building 6, Suite 500  
 Greenville, SC 29615  
 T: (864) 234-3000 F: (864) 234-3069

**Groundwater Locations Identified Within the Core of the VOC Plume at Each Parcel**

Army National Guard OMS #28  
 Mobile, Alabama

PROJECT NO. 60439687	DRAWN BY: TEG	DATE: 3/5/2019	<b>Figure 5</b>
-------------------------	------------------	-------------------	-----------------



**APPENDICES**

**APPENDIX A  
VISL CALCULATOR OUTPUT**

**Table A-1**  
**VISL Calculator Commercial (HQ=0.1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Commercial Vapor Intrusion Screening Levels (VISL)**

Output generated 27JUN2018:14:45:42

Chemical	CAS Number	Does the chemical meet the definition for volatility? (HLC>1E-5 or VP>1)	Does the chemical have inhalation toxicity data? (IUR and/or RfC)	Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Soil Source? (C <sub>vp</sub> > C <sub>ia,Target</sub> ?)	Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Groundwater Source? (C <sub>hc</sub> > C <sub>ia,Target</sub> ?)	Target Indoor Air Concentration (TCR=1E-06 or THQ=0.1) (µg/m <sup>3</sup> )	Toxicity Basis	Target Sub-Slab and Near-source Soil Gas Concentration (TCR=1E-06 or THQ=0.1) C <sub>sg,Target</sub> (µg/m <sup>3</sup> )	Target Groundwater Concentration (TCR=1E-06 or THQ=0.1) C <sub>gw,Target</sub> (µg/L)	Is Target Groundwater Concentration < MCL? (C <sub>gw</sub> < MCL?)	Pure Phase Vapor Concentration C <sub>vp</sub> (21 ) (µg/m <sup>3</sup> )	Maximum Groundwater Vapor Concentration C <sub>hc</sub> (µg/m <sup>3</sup> )	Temperature for Maximum Groundwater Vapor Concentration ( )	Lower Explosive Limit LEL (% by volume)	LEL Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	Mutagenic Indicator	Carcinogenic VISL TCR=1E-06 C <sub>ia,c</sub> (µg/m <sup>3</sup> )	Noncarcinogenic VISL THQ=0.1 C <sub>ia,nc</sub> (µg/m <sup>3</sup> )
Acetone	67-64-1	Yes	Yes	Yes	Yes	13500	NC	451000	11100000	--	723000000	1220000000	21	2.5	CRC89	-		30.9	A	No	-	13500
Carbon Disulfide	75-15-0	Yes	Yes	Yes	Yes	307	NC	10200	598	--	1470000000	1110000000	21	1.3	CRC89	-		0.7	I	No	-	307
Cumene	98-82-8	Yes	Yes	Yes	Yes	175	NC	5840	490	--	291000000	219000000	21	0.9	CRC89	-		0.4	I	No	-	175
Dichloroethylene, 1,1-	75-35-4	Yes	Yes	Yes	Yes	87.6	NC	2920	93.8	No (7)	3130000000	2260000000	21	6.5	CRC89	-		0.2	I	No	-	87.6
Dichloroethylene, 1,2-cis-	156-59-2	Yes	No	No Inhal. Tox. Info	No Inhal. Tox. Info	-		-	-		1040000000	909000000	21	3	CRC89	-		-		No	-	-
Dichloroethylene, 1,2-trans-	156-60-5	Yes	No	No Inhal. Tox. Info	No Inhal. Tox. Info	-		-	-		1730000000	1490000000	21	6	CRC89	-		-		No	-	-
Methyl Ethyl Ketone (2-Butanone)	78-93-3	Yes	Yes	Yes	Yes	2190	NC	73000	1120000	--	351000000	435000000	21	1.4	CRC89	-		5	I	No	-	2190
Methylene Chloride	75-09-2	Yes	Yes	Yes	Yes	263	NC	8760	2290	No (5)	1990000000	1490000000	21	13	CRC89	0.00000001	I	0.6	I	Mut	1230	263
Tetrachloroethylene	127-18-4	Yes	Yes	Yes	Yes	17.5	NC	584	29.7	No (5)	165000000	122000000	21	-		0.00000026	I	0.04	I	No	47.2	17.5
Trichloroethylene	79-01-6	Yes	Yes	Yes	Yes	0.876	NC	29.2	2.59	Yes (5)	488000000	432000000	21	8	CRC89	0.0000041	I	0.002	I	Mut	2.99	0.876
Vinyl Chloride	75-01-4	Yes	Yes	Yes	Yes	2.79	CA	92.9	2.69	No (2)	10000000000	9120000000	21	3.6	CRC89	0.0000044	I	0.1	I	Mut	2.79	43.8

**Table A-2**  
**VISL Calculator Commercial (HQ=1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Commercial Vapor Intrusion Screening Levels (VISL)**

Output generated 27JUN2018:14:47:28

Chemical	CAS Number	Does the chemical meet the definition for volatility? (HLC>1E-5 or VP>1)	Does the chemical have inhalation toxicity data? (IUR and/or RfC)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Soil Source? (C <sub>vp</sub> > C <sub>ia,T</sub> Target?)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Groundwater Source? (C <sub>hc</sub> > C <sub>ia,T</sub> Target?)	Target Indoor Air Concentration (TCR=1E-06 or THQ=1) MIN(C <sub>ia,c</sub> , C <sub>ia,nc</sub> ) (µg/m <sup>3</sup> )	Toxicity Basis	Target Sub-Slab and Near-source Soil Gas Concentration (TCR=1E-06 or THQ=1) C <sub>sg,T</sub> Target (µg/m <sup>3</sup> )	Target Groundwater Concentration (TCR=1E-06 or THQ=1) C <sub>gw,T</sub> Target (µg/L)	Is Target Groundwater Concentration < MCL? (C <sub>gw</sub> < MCL?)	Pure Phase Vapor Concentration C <sub>vp</sub> (21 ) (µg/m <sup>3</sup> )	Maximum Groundwater Vapor Concentration C <sub>hc</sub> (µg/m <sup>3</sup> )	Temperature for Maximum Groundwater Vapor Concentration ( )	Lower Explosive Limit LEL (% by volume)	LEL Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	Mutagenic Indicator	Carcinogenic VISL TCR=1E-06 C <sub>ia,c</sub> (µg/m <sup>3</sup> )	Noncarcinogenic VISL THQ=1 C <sub>ia,nc</sub> (µg/m <sup>3</sup> )
Trichloroethylene	79-01-6	Yes	Yes	Yes	Yes	2.99	CA	99.7	8.86	No (5)	488000000	432000000	21	8	CRC89	0.0000041	I	0.002	I	Mut	2.99	8.76



**Table A-3**  
**VISL Calculator Resident (HQ=0.1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

## Resident Vapor Intrusion Screening Levels (VISL)

Output generated 27JUN2018:14:45:02

Chemical	CAS Number	Does the chemical meet the definition for volatility? (HLC>1E-5 or VP>1)	Does the chemical have inhalation toxicity data? (IUR and/or RfC)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Soil Source? (C <sub>vp</sub> > C <sub>ia,Target</sub> ?)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Groundwater Source? (C <sub>hc</sub> > C <sub>ia,Target</sub> ?)	Target Indoor Air Concentration (TCR=1E-06 or THQ=0.1) MIN(C <sub>ia,c</sub> , C <sub>ia,nc</sub> ) (µg/m <sup>3</sup> )	Toxicity Basis	Target Sub-Slab and Near-source Soil Gas Concentration (TCR=1E-06 or THQ=0.1) C <sub>sg,Target</sub> (µg/m <sup>3</sup> )	Target Groundwater Concentration (TCR=1E-06 or THQ=0.1) C <sub>gw,Target</sub> (µg/L)	Is Target Groundwater Concentration < MCL? (C <sub>gw</sub> < MCL?)	Pure Phase Vapor Concentration C <sub>vp</sub> (21 ) (µg/m <sup>3</sup> )	Maximum Groundwater Vapor Concentration C <sub>hc</sub> (µg/m <sup>3</sup> )	Temperature for Maximum Groundwater Vapor Concentration ( )	Lower Explosive Limit LEL (% by volume)	LEL Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	Mutagenic Indicator	Carcinogenic VISL TCR=1E-06 C <sub>ia,c</sub> (µg/m <sup>3</sup> )	Noncarcinogenic VISL THQ=0.1 C <sub>ia,nc</sub> (µg/m <sup>3</sup> )
Acetone	67-64-1	Yes	Yes	Yes	Yes	3220	NC	107000	2630000	--	723000000	1220000000	21	2.5	CRC89	-		30.9	A	No	-	3220
Carbon Disulfide	75-15-0	Yes	Yes	Yes	Yes	73	NC	2430	142	--	1470000000	1110000000	21	1.3	CRC89	-		0.7	I	No	-	73
Cumene	98-82-8	Yes	Yes	Yes	Yes	41.7	NC	1390	117	--	291000000	219000000	21	0.9	CRC89	-		0.4	I	No	-	41.7
Dichloroethylene, 1,1-	75-35-4	Yes	Yes	Yes	Yes	20.9	NC	695	22.3	No (7)	3130000000	2260000000	21	6.5	CRC89	-		0.2	I	No	-	20.9
Dichloroethylene, 1,2-cis-	156-59-2	Yes	No	No Inhal. Tox. Info	No Inhal. Tox. Info	-		-	-		1040000000	909000000	21	3	CRC89	-		-		No	-	-
Dichloroethylene, 1,2-trans-	156-60-5	Yes	No	No Inhal. Tox. Info	No Inhal. Tox. Info	-		-	-		1730000000	1490000000	21	6	CRC89	-		-		No	-	-
Methyl Ethyl Ketone (2-Butanone)	78-93-3	Yes	Yes	Yes	Yes	521	NC	17400	267000	--	351000000	435000000	21	1.4	CRC89	-		5	I	No	-	521
Methylene Chloride	75-09-2	Yes	Yes	Yes	Yes	62.6	NC	2090	545	No (5)	1990000000	1490000000	21	13	CRC89	1E-08	I	0.6	I	Mut	101	62.6
Tetrachloroethylene	127-18-4	Yes	Yes	Yes	Yes	4.17	NC	139	7.06	No (5)	165000000	122000000	21	-		2.6E-07	I	0.04	I	No	10.8	4.17
Trichloroethylene	79-01-6	Yes	Yes	Yes	Yes	0.209	NC	6.95	0.618	Yes (5)	488000000	432000000	21	8	CRC89	0.0000041	I	0.002	I	Mut	0.478	0.209
Vinyl Chloride	75-01-4	Yes	Yes	Yes	Yes	0.168	CA	5.59	0.162	Yes (2)	1000000000	912000000	21	3.6	CRC89	0.0000044	I	0.1	I	Mut	0.168	10.4

**Table A-4**  
**VISL Calculator Resident (HQ=1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

## Resident Vapor Intrusion Screening Levels (VISL)

Output generated 27JUN2018:14:46:52

Chemical	CAS Number	Does the chemical meet the definition for volatility? (HLC>1E-5 or VP>1)	Does the chemical have inhalation toxicity data? (IUR and/or RfC)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Soil Source? (C <sub>vp</sub> > C <sub>ia,Target</sub> ?)	Is Chemical Sufficiently Volatile and Toxic to Pose Inhalation Risk Via Vapor Intrusion from Groundwater Source? (C <sub>hc</sub> > C <sub>ia,Target</sub> ?)	Target Indoor Air Concentration (TCR=1E-06 or THQ=1) MIN(C <sub>ia,c</sub> , C <sub>ia,nc</sub> ) (µg/m <sup>3</sup> )	Toxicity Basis	Target Sub-Slab and Near-source Soil Gas Concentration (TCR=1E-06 or THQ=1) C <sub>sg,Target</sub> (µg/m <sup>3</sup> )	Target Groundwater Concentration (TCR=1E-06 or THQ=1) C <sub>gw,Target</sub> (µg/L)	Is Target Groundwater Concentration < MCL? (C <sub>gw</sub> < MCL?)	Pure Phase Vapor Concentration C <sub>vp</sub> (21 ) (µg/m <sup>3</sup> )	Maximum Groundwater Vapor Concentration C <sub>hc</sub> (µg/m <sup>3</sup> )	Temperature for Maximum Groundwater Vapor Concentration ( )	Lower Explosive Limit LEL (% by volume)	LEL Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	Mutagenic Indicator	Carcinogenic VISL TCR=1E-06 C <sub>ia,c</sub> (µg/m <sup>3</sup> )	Noncarcinogenic VISL THQ=1 C <sub>ia,nc</sub> (µg/m <sup>3</sup> )
Trichloroethylene	79-01-6	Yes	Yes	Yes	Yes	0.478	CA	15.9	1.42	Yes (5)	488000000	432000000	21	8	CRC89	0.0000041	I	0.002	I	Mut	0.478	2.09

**APPENDIX B**  
**PROUCL OUTPUT**

**Human Health ProUCL Output  
Surface Soil**

**UCL Statistics for Data Sets with Non-Detects**

User Selected Options

Date/Time of Computation ProUCL 5.16/19/2018 11:50:52 AM  
 From File Input SS.xls  
 Full Precision OFF  
 Confidence Coefficient 95%  
 Number of Bootstrap Operations 2000

**A-Tetrachloroethene**

**General Statistics**

Total Number of Observations	8	Number of Distinct Observations	8
Number of Detects	7	Number of Non-Detects	1
Number of Distinct Detects	7	Number of Distinct Non-Detects	1
Minimum Detect	0.00116	Minimum Non-Detect	0.002
Maximum Detect	329	Maximum Non-Detect	0.002
Variance Detects	14732	Percent Non-Detects	12.5%
Mean Detects	54.28	SD Detects	121.4
Median Detects	8.903	CV Detects	2.236
Skewness Detects	2.624	Kurtosis Detects	6.913
Mean of Logged Detects	0.701	SD of Logged Detects	4.385

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).**

**Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.511	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.469	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data Not Normal at 5% Significance Level

**Detected Data Not Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	47.49	KM Standard Error of Mean	40.72
KM SD	106.6	95% KM (BCA) UCL	127.9
95% KM (t) UCL	124.6	95% KM (Percentile Bootstrap) UCL	126.5
95% KM (z) UCL	114.5	95% KM Bootstrap t UCL	831.9
90% KM Chebyshev UCL	169.7	95% KM Chebyshev UCL	225
97.5% KM Chebyshev UCL	301.8	99% KM Chebyshev UCL	452.7

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.369	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.815	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.237	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.341	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.22	k star (bias corrected MLE)	0.221
Theta hat (MLE)	246.6	Theta star (bias corrected MLE)	245.6
nu hat (MLE)	3.082	nu star (bias corrected)	3.094
Mean (detects)	54.28		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

**Human Health ProUCL Output  
Surface Soil**

**A-Tetrachloroethene**

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.00116	Mean	47.5
Maximum	329	Median	7.373
SD	114	CV	2.4
k hat (MLE)	0.194	k star (bias corrected MLE)	0.204
Theta hat (MLE)	245.5	Theta star (bias corrected MLE)	232.5
nu hat (MLE)	3.096	nu star (bias corrected)	3.268
Adjusted Level of Significance ( $\beta$ )	0.0195		
Approximate Chi Square Value (3.27, $\alpha$ )	0.456	Adjusted Chi Square Value (3.27, $\beta$ )	0.265
95% Gamma Approximate UCL (use when $n \geq 50$ )	340.3	95% Gamma Adjusted UCL (use when $n < 50$ )	585.2

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	47.49	SD (KM)	106.6
Variance (KM)	11371	SE of Mean (KM)	40.72
k hat (KM)	0.198	k star (KM)	0.207
nu hat (KM)	3.174	nu star (KM)	3.317
theta hat (KM)	239.4	theta star (KM)	229.1
80% gamma percentile (KM)	63.74	90% gamma percentile (KM)	143.6
95% gamma percentile (KM)	242.4	99% gamma percentile (KM)	512.8

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (3.32, $\alpha$ )	0.472	Adjusted Chi Square Value (3.32, $\beta$ )	0.275
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	333.6	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	572

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.875	<b>Shapiro Wilk GOF Test</b>	
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Lognormal at 5% Significance Level	
Lilliefors Test Statistic	0.31	<b>Lilliefors GOF Test</b>	
5% Lilliefors Critical Value	0.304	Detected Data Not Lognormal at 5% Significance Level	

**Detected Data appear Approximate Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	47.49	Mean in Log Scale	-0.155
SD in Original Scale	114	SD in Log Scale	4.727
95% t UCL (assumes normality of ROS data)	123.9	95% Percentile Bootstrap UCL	126.9
95% BCA Bootstrap UCL	166.7	95% Bootstrap t UCL	854.5
95% H-UCL (Log ROS)	4.802E+15		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	-0.231	KM Geo Mean	0.793
KM SD (logged)	4.529	95% Critical H Value (KM-Log)	13.46
KM Standard Error of Mean (logged)	1.73	95% H-UCL (KM -Log)	2.313E+14
KM SD (logged)	4.529	95% Critical H Value (KM-Log)	13.46
KM Standard Error of Mean (logged)	1.73		

**DL/2 Statistics**

**DL/2 Normal**

Mean in Original Scale	47.49
SD in Original Scale	114
95% t UCL (Assumes normality)	123.9

**DL/2 Log-Transformed**

Mean in Log Scale	-0.25
SD in Log Scale	4.87
95% H-Stat UCL	4.016E+16

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Gamma Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM Bootstrap t UCL	831.9	Adjusted KM-UCL (use when $k \leq 1$ and $15 < n < 50$ but $k \leq 1$ )	572
------------------------	-------	---	-----

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Subsurface Soil**

**UCL Statistics for Data Sets with Non-Detects**

User Selected Options

Date/Time of Computation ProUCL 5.16/19/2018 11:53:53 AM  
 From File Input SSS.xls  
 Full Precision OFF  
 Confidence Coefficient 95%  
 Number of Bootstrap Operations 2000

**A-Tetrachloroethene**

**General Statistics**

Total Number of Observations	16	Number of Distinct Observations	13
Number of Detects	12	Number of Non-Detects	4
Number of Distinct Detects	12	Number of Distinct Non-Detects	1
Minimum Detect	0.00244	Minimum Non-Detect	0.002
Maximum Detect	53.7	Maximum Non-Detect	0.002
Variance Detects	269.1	Percent Non-Detects	25%
Mean Detects	6.578	SD Detects	16.4
Median Detects	0.0884	CV Detects	2.494
Skewness Detects	2.658	Kurtosis Detects	6.955
Mean of Logged Detects	-2.026	SD of Logged Detects	3.001

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.477	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.859	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.484	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.243	Detected Data Not Normal at 5% Significance Level

**Detected Data Not Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	4.934	KM Standard Error of Mean	3.629
KM SD	13.9	95% KM (BCA) UCL	11.33
95% KM (t) UCL	11.29	95% KM (Percentile Bootstrap) UCL	11.63
95% KM (z) UCL	10.9	95% KM Bootstrap t UCL	1061
90% KM Chebyshev UCL	15.82	95% KM Chebyshev UCL	20.75
97.5% KM Chebyshev UCL	27.59	99% KM Chebyshev UCL	41.04

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	1.824	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.881	Detected Data Not Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.412	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.273	Detected Data Not Gamma Distributed at 5% Significance Level

**Detected Data Not Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.19	k star (bias corrected MLE)	0.198
Theta hat (MLE)	34.66	Theta star (bias corrected MLE)	33.24
nu hat (MLE)	4.554	nu star (bias corrected)	4.749
Mean (detects)	6.578		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
 GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)  
 For such situations, GROS method may yield incorrect values of UCLs and BTVs  
 This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.00244	Mean	4.936
Maximum	53.7	Median	0.0496
SD	14.35	CV	2.908

**Human Health ProUCL Output  
Subsurface Soil**

**A-Tetrachloroethene**

k hat (MLE)	0.176	k star (bias corrected MLE)	0.185
Theta hat (MLE)	28.06	Theta star (bias corrected MLE)	26.74
nu hat (MLE)	5.629	nu star (bias corrected)	5.907
Adjusted Level of Significance ( $\beta$ )	0.0335		
Approximate Chi Square Value (5.91, $\alpha$ )	1.592	Adjusted Chi Square Value (5.91, $\beta$ )	1.352
95% Gamma Approximate UCL (use when $n \geq 50$ )	18.31	95% Gamma Adjusted UCL (use when $n < 50$ )	21.56

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	4.934	SD (KM)	13.9
Variance (KM)	193.1	SE of Mean (KM)	3.629
k hat (KM)	0.126	k star (KM)	0.144
nu hat (KM)	4.034	nu star (KM)	4.611
theta hat (KM)	39.14	theta star (KM)	34.24
80% gamma percentile (KM)	5.191	90% gamma percentile (KM)	14.54
95% gamma percentile (KM)	27.36	99% gamma percentile (KM)	64.88

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (4.61, $\alpha$ )	0.977	Adjusted Chi Square Value (4.61, $\beta$ )	0.804
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	23.29	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	28.29

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.855	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.859	Detected Data Not Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.255	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.243	Detected Data Not Lognormal at 5% Significance Level

**Detected Data Not Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	4.933	Mean in Log Scale	-3.765
SD in Original Scale	14.35	SD in Log Scale	4.091
95% t UCL (assumes normality of ROS data)	11.22	95% Percentile Bootstrap UCL	11.35
95% BCA Bootstrap UCL	14.99	95% Bootstrap t UCL	1055
95% H-UCL (Log ROS)	890970		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	-3.073	KM Geo Mean	0.0463
KM SD (logged)	3.079	95% Critical H Value (KM-Log)	6.579
KM Standard Error of Mean (logged)	0.804	95% H-UCL (KM -Log)	990.2
KM SD (logged)	3.079	95% Critical H Value (KM-Log)	6.579
KM Standard Error of Mean (logged)	0.804		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	4.934	Mean in Log Scale	-3.247
SD in Original Scale	14.35	SD in Log Scale	3.372
95% t UCL (Assumes normality)	11.22	95% H-Stat UCL	5864

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Data do not follow a Discernible Distribution at 5% Significance Level**

**Suggested UCL to Use**

99% KM (Chebyshev) UCL	41.04
------------------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**UCL Statistics for Data Sets with Non-Detects**

User Selected Options

Date/Time of Computation ProUCL 5.16/19/2018 1:32:37 PM  
 From File Input GW Plumes.xls  
 Full Precision OFF  
 Confidence Coefficient 95%  
 Number of Bootstrap Operations 2000

**Parcel A - Tetrachloroethene**

**General Statistics**

Total Number of Observations	18	Number of Distinct Observations	14
Number of Detects	13	Number of Non-Detects	5
Number of Distinct Detects	13	Number of Distinct Non-Detects	1
Minimum Detect	0.863	Minimum Non-Detect	1
Maximum Detect	40000	Maximum Non-Detect	1
Variance Detects	1.210E+8	Percent Non-Detects	27.78%
Mean Detects	3447	SD Detects	11000
Median Detects	95.7	CV Detects	3.191
Skewness Detects	3.586	Kurtosis Detects	12.89
Mean of Logged Detects	4.568	SD of Logged Detects	3.092

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.351	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.866	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.483	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.234	Detected Data Not Normal at 5% Significance Level

**Detected Data Not Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	2490	KM Standard Error of Mean	2236
KM SD	9113	95% KM (BCA) UCL	6905
95% KM (t) UCL	6379	95% KM (Percentile Bootstrap) UCL	6876
95% KM (z) UCL	6167	95% KM Bootstrap t UCL	60392
90% KM Chebyshev UCL	9197	95% KM Chebyshev UCL	12235
97.5% KM Chebyshev UCL	16452	99% KM Chebyshev UCL	24735

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	1.191	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.871	Detected Data Not Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.297	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.262	Detected Data Not Gamma Distributed at 5% Significance Level

**Detected Data Not Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.205	k star (bias corrected MLE)	0.209
Theta hat (MLE)	16819	Theta star (bias corrected MLE)	16498
nu hat (MLE)	5.328	nu star (bias corrected)	5.432
Mean (detects)	3447		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
 GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)  
 For such situations, GROS method may yield incorrect values of UCLs and BTVs  
 This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	2489
Maximum	40000	Median	56.2
SD	9378	CV	3.767



**Human Health ProUCL Output  
Groundwater**

**Parcel A - Tetrachloroethene**

k hat (MLE)	0.135	k star (bias corrected MLE)	0.149
Theta hat (MLE)	18497	Theta star (bias corrected MLE)	16686
nu hat (MLE)	4.845	nu star (bias corrected)	5.371
Adjusted Level of Significance ( $\beta$ )	0.0357		
Approximate Chi Square Value (5.37, $\alpha$ )	1.327	Adjusted Chi Square Value (5.37, $\beta$ )	1.146
95% Gamma Approximate UCL (use when $n \geq 50$ )	10073	95% Gamma Adjusted UCL (use when $n < 50$ )	11665

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	2490	SD (KM)	9113
Variance (KM)	83053675	SE of Mean (KM)	2236
k hat (KM)	0.0746	k star (KM)	0.0992
nu hat (KM)	2.687	nu star (KM)	3.572
theta hat (KM)	33360	theta star (KM)	25090
80% gamma percentile (KM)	1708	90% gamma percentile (KM)	6605
95% gamma percentile (KM)	14457	99% gamma percentile (KM)	39701

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (3.57, $\alpha$ )	0.56	Adjusted Chi Square Value (3.57, $\beta$ )	0.462
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	15870	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	19230
95% Gamma Adjusted KM-UCL (use when $k \leq 1$ and $15 < n < 50$ )			

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.941	<b>Shapiro Wilk GOF Test</b>	
5% Shapiro Wilk Critical Value	0.866	Detected Data appear Lognormal at 5% Significance Level	
Lilliefors Test Statistic	0.164	<b>Lilliefors GOF Test</b>	
5% Lilliefors Critical Value	0.234	Detected Data appear Lognormal at 5% Significance Level	

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	2490	Mean in Log Scale	2.9
SD in Original Scale	9378	SD in Log Scale	3.88
95% t UCL (assumes normality of ROS data)	6335	95% Percentile Bootstrap UCL	6891
95% BCA Bootstrap UCL	9281	95% Bootstrap t UCL	56655
95% H-UCL (Log ROS)	55476623		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	3.258	KM Geo Mean	26
KM SD (logged)	3.291	95% Critical H Value (KM-Log)	6.735
KM Standard Error of Mean (logged)	0.807	95% H-UCL (KM -Log)	1265468
KM SD (logged)	3.291	95% Critical H Value (KM-Log)	6.735
KM Standard Error of Mean (logged)	0.807		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	2490	Mean in Log Scale	3.106
SD in Original Scale	9378	SD in Log Scale	3.553
95% t UCL (Assumes normality)	6335	95% H-Stat UCL	6315484

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Lognormal Distributed at 5% Significance Level**

**Suggested UCL to Use**

99% KM (Chebyshev) UCL 24735

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel A - Trichloroethene**

**General Statistics**

Total Number of Observations	18	Number of Distinct Observations	12
Number of Detects	11	Number of Non-Detects	7
Number of Distinct Detects	11	Number of Distinct Non-Detects	1
Minimum Detect	0.751	Minimum Non-Detect	1
Maximum Detect	46	Maximum Non-Detect	1
Variance Detects	309.8	Percent Non-Detects	38.89%
Mean Detects	17.8	SD Detects	17.6
Median Detects	13.5	CV Detects	0.989
Skewness Detects	0.518	Kurtosis Detects	-1.622
Mean of Logged Detects	2.03	SD of Logged Detects	1.642

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.839	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.85	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.205	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.251	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Approximate Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	11.2	KM Standard Error of Mean	3.834
KM SD	15.51	95% KM (BCA) UCL	18.05
95% KM (t) UCL	17.87	95% KM (Percentile Bootstrap) UCL	17.75
95% KM (z) UCL	17.51	95% KM Bootstrap t UCL	19.8
90% KM Chebyshev UCL	22.7	95% KM Chebyshev UCL	27.91
97.5% KM Chebyshev UCL	35.14	99% KM Chebyshev UCL	49.35

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.552	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.765	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.21	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.266	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.71	k star (bias corrected MLE)	0.577
Theta hat (MLE)	25.06	Theta star (bias corrected MLE)	30.83
nu hat (MLE)	15.63	nu star (bias corrected)	12.7
Mean (detects)	17.8		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	11.37
Maximum	46	Median	3.081
SD	15.88	CV	1.396
k hat (MLE)	0.329	k star (bias corrected MLE)	0.311
Theta hat (MLE)	34.56	Theta star (bias corrected MLE)	36.54
nu hat (MLE)	11.85	nu star (bias corrected)	11.21
Adjusted Level of Significance ( $\beta$ )	0.0357		
Approximate Chi Square Value (11.21, $\alpha$ )	4.71	Adjusted Chi Square Value (11.21, $\beta$ )	4.311
95% Gamma Approximate UCL (use when $n \geq 50$ )	27.07	95% Gamma Adjusted UCL (use when $n < 50$ )	29.57

**Human Health ProUCL Output  
Groundwater**

**Parcel A - Trichloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	11.2	SD (KM)	15.51
Variance (KM)	240.5	SE of Mean (KM)	3.834
k hat (KM)	0.522	k star (KM)	0.472
nu hat (KM)	18.78	nu star (KM)	16.98
theta hat (KM)	21.47	theta star (KM)	23.75
80% gamma percentile (KM)	18.34	90% gamma percentile (KM)	30.67
95% gamma percentile (KM)	43.93	99% gamma percentile (KM)	76.72

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (16.98, $\alpha$ )	8.658	Adjusted Chi Square Value (16.98, $\beta$ )	8.091
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	21.97	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	23.5

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.859	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.85	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.187	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.251	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	11.39	Mean in Log Scale	1.213
SD in Original Scale	15.84	SD in Log Scale	1.741
95% t UCL (assumes normality of ROS data)	17.88	95% Percentile Bootstrap UCL	17.59
95% BCA Bootstrap UCL	18.26	95% Bootstrap t UCL	19.25
95% H-UCL (Log ROS)	77.8		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	1.167	KM Geo Mean	3.212
KM SD (logged)	1.634	95% Critical H Value (KM-Log)	3.664
KM Standard Error of Mean (logged)	0.405	95% H-UCL (KM -Log)	52.2
KM SD (logged)	1.634	95% Critical H Value (KM-Log)	3.664
KM Standard Error of Mean (logged)	0.405		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	11.07	Mean in Log Scale	0.971
SD in Original Scale	16.05	SD in Log Scale	1.858
95% t UCL (Assumes normality)	17.65	95% H-Stat UCL	92.39

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Approximate Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	17.87
----------------	-------

When a data set follows an approximate (e.g., normal) distribution passing one of the GOF test

When applicable, it is suggested to use a UCL based upon a distribution (e.g., gamma) passing both GOF tests in ProUCL

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

Human Health ProUCL Output  
Groundwater

Parcel B - Trichloroethene

General Statistics			
Total Number of Observations	3	Number of Distinct Observations	2
Number of Detects	1	Number of Non-Detects	2
Number of Distinct Detects	1	Number of Distinct Non-Detects	1

**Warning: Only one distinct data value was detected! ProUCL (or any other software) should not be used on such a data set!**  
It is suggested to use alternative site specific values determined by the Project Team to estimate environmental parameters (e.g., EPC, BTV).

The data set for variable Parcel B - Trichloroethene was not processed!

Human Health ProUCL Output  
Groundwater

Parcel C - Trichloroethene

General Statistics			
Total Number of Observations	1	Number of Distinct Observations	1
		Number of Missing Observations	0
Minimum	4.43	Mean	4.43
Maximum	4.43	Median	4.43

**Warning: This data set only has 1 observations!**

**Data set is too small to compute reliable and meaningful statistics and estimates!**

**The data set for variable Parcel C - Trichloroethene was not processed!**

**It is suggested to collect at least 8 to 10 observations before using these statistical methods!  
If possible, compute and collect Data Quality Objectives (DQO) based sample size and analytical results.**

**Human Health ProUCL Output  
Groundwater**

**Parcel D - Trichloroethene**

**General Statistics**

Total Number of Observations	5	Number of Distinct Observations	5
Number of Detects	4	Number of Non-Detects	1
Number of Distinct Detects	4	Number of Distinct Non-Detects	1
Minimum Detect	1.3	Minimum Non-Detect	1
Maximum Detect	27.1	Maximum Non-Detect	1
Variance Detects	121.7	Percent Non-Detects	20%
Mean Detects	11.38	SD Detects	11.03
Median Detects	8.56	CV Detects	0.969
Skewness Detects	1.397	Kurtosis Detects	2.605
Mean of Logged Detects	1.963	SD of Logged Detects	1.258

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.876	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.748	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.335	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.375	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	9.304	KM Standard Error of Mean	4.906
KM SD	9.5	95% KM (BCA) UCL	N/A
95% KM (t) UCL	19.76	95% KM (Percentile Bootstrap) UCL	N/A
95% KM (z) UCL	17.37	95% KM Bootstrap t UCL	N/A
90% KM Chebyshev UCL	24.02	95% KM Chebyshev UCL	30.69
97.5% KM Chebyshev UCL	39.94	99% KM Chebyshev UCL	58.12

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.292	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.665	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.234	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.401	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	1.207	k star (bias corrected MLE)	0.468
Theta hat (MLE)	9.432	Theta star (bias corrected MLE)	24.3
nu hat (MLE)	9.652	nu star (bias corrected)	3.746
Mean (detects)	11.38		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)  
For such situations, GROS method may yield incorrect values of UCLs and BTVs  
This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	9.106
Maximum	27.1	Median	8.1
SD	10.82	CV	1.188
k hat (MLE)	0.419	k star (bias corrected MLE)	0.301
Theta hat (MLE)	21.74	Theta star (bias corrected MLE)	30.26
nu hat (MLE)	4.189	nu star (bias corrected)	3.009
Adjusted Level of Significance ( $\beta$ )	0.0086		
Approximate Chi Square Value (3.01, $\alpha$ )	0.375	Adjusted Chi Square Value (3.01, $\beta$ )	0.14
95% Gamma Approximate UCL (use when $n \geq 50$ )	73.05	95% Gamma Adjusted UCL (use when $n < 50$ )	N/A

**Human Health ProUCL Output  
Groundwater**

**Parcel D - Trichloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	9.304	SD (KM)	9.5
Variance (KM)	90.25	SE of Mean (KM)	4.906
k hat (KM)	0.959	k star (KM)	0.517
nu hat (KM)	9.592	nu star (KM)	5.17
theta hat (KM)	9.7	theta star (KM)	18
80% gamma percentile (KM)	15.3	90% gamma percentile (KM)	25
95% gamma percentile (KM)	35.32	99% gamma percentile (KM)	60.62

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (5.17, $\alpha$ )	1.232	Adjusted Chi Square Value (5.17, $\beta$ )	0.582
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	39.06	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	82.68

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.933	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.748	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.291	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.375	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	9.162	Mean in Log Scale	1.322
SD in Original Scale	10.76	SD in Log Scale	1.802
95% t UCL (assumes normality of ROS data)	19.42	95% Percentile Bootstrap UCL	16.78
95% BCA Bootstrap UCL	18.32	95% Bootstrap t UCL	28.69
95% H-UCL (Log ROS)	39684		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	1.571	KM Geo Mean	4.81
KM SD (logged)	1.252	95% Critical H Value (KM-Log)	6.009
KM Standard Error of Mean (logged)	0.646	95% H-UCL (KM -Log)	452.6
KM SD (logged)	1.252	95% Critical H Value (KM-Log)	6.009
KM Standard Error of Mean (logged)	0.646		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	9.204	Mean in Log Scale	1.432
SD in Original Scale	10.72	SD in Log Scale	1.612
95% t UCL (Assumes normality)	19.43	95% H-Stat UCL	7176

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	19.76
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel E - cis-1,2-Dichloroethene**

**General Statistics**

Total Number of Observations	8	Number of Distinct Observations	6
Number of Detects	5	Number of Non-Detects	3
Number of Distinct Detects	5	Number of Distinct Non-Detects	1
Minimum Detect	0.521	Minimum Non-Detect	0.5
Maximum Detect	7.56	Maximum Non-Detect	0.5
Variance Detects	6.5	Percent Non-Detects	37.5%
Mean Detects	3.806	SD Detects	2.549
Median Detects	3.71	CV Detects	0.67
Skewness Detects	0.424	Kurtosis Detects	1.344
Mean of Logged Detects	1.043	SD of Logged Detects	1.011

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).**

**Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.971	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.217	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.343	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	2.566	KM Standard Error of Mean	0.953
KM SD	2.411	95% KM (BCA) UCL	4.005
95% KM (t) UCL	4.372	95% KM (Percentile Bootstrap) UCL	3.953
95% KM (z) UCL	4.134	95% KM Bootstrap t UCL	4.173
90% KM Chebyshev UCL	5.425	95% KM Chebyshev UCL	6.72
97.5% KM Chebyshev UCL	8.517	99% KM Chebyshev UCL	12.05

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.343	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.685	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.259	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.361	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	1.851	k star (bias corrected MLE)	0.874
Theta hat (MLE)	2.056	Theta star (bias corrected MLE)	4.355
nu hat (MLE)	18.51	nu star (bias corrected)	8.739
Mean (detects)	3.806		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	2.383
Maximum	7.56	Median	1.711
SD	2.752	CV	1.155
k hat (MLE)	0.347	k star (bias corrected MLE)	0.3
Theta hat (MLE)	6.875	Theta star (bias corrected MLE)	7.944
nu hat (MLE)	5.545	nu star (bias corrected)	4.799
Adjusted Level of Significance ( $\beta$ )	0.0195		
Approximate Chi Square Value (4.80, $\alpha$ )	1.061	Adjusted Chi Square Value (4.80, $\beta$ )	0.686
95% Gamma Approximate UCL (use when $n \geq 50$ )	10.78	95% Gamma Adjusted UCL (use when $n < 50$ )	16.66



**Human Health ProUCL Output  
Groundwater**

**Parcel E - cis-1,2-Dichloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	2.566	SD (KM)	2.411
Variance (KM)	5.812	SE of Mean (KM)	0.953
k hat (KM)	1.133	k star (KM)	0.792
nu hat (KM)	18.13	nu star (KM)	12.67
theta hat (KM)	2.265	theta star (KM)	3.242
80% gamma percentile (KM)	4.196	90% gamma percentile (KM)	6.256
95% gamma percentile (KM)	8.357	99% gamma percentile (KM)	13.32

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (12.67, $\alpha$ )	5.669	Adjusted Chi Square Value (12.67, $\beta$ )	4.541
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	5.734	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	7.158

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.86	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.309	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.343	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	2.476	Mean in Log Scale	0.0973
SD in Original Scale	2.663	SD in Log Scale	1.55
95% t UCL (assumes normality of ROS data)	4.26	95% Percentile Bootstrap UCL	4.002
95% BCA Bootstrap UCL	4.261	95% Bootstrap t UCL	4.84
95% H-UCL (Log ROS)	63.83		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	0.392	KM Geo Mean	1.48
KM SD (logged)	1.103	95% Critical H Value (KM-Log)	3.685
KM Standard Error of Mean (logged)	0.436	95% H-UCL (KM -Log)	12.64
KM SD (logged)	1.103	95% Critical H Value (KM-Log)	3.685
KM Standard Error of Mean (logged)	0.436		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	2.473	Mean in Log Scale	0.132
SD in Original Scale	2.665	SD in Log Scale	1.471
95% t UCL (Assumes normality)	4.258	95% H-Stat UCL	44.98

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	4.372
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL. Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006). However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel E - Trichloroethene**

**General Statistics**

Total Number of Observations	10	Number of Distinct Observations	8
Number of Detects	7	Number of Non-Detects	3
Number of Distinct Detects	7	Number of Distinct Non-Detects	1
Minimum Detect	6.26	Minimum Non-Detect	0.5
Maximum Detect	291	Maximum Non-Detect	0.5
Variance Detects	15173	Percent Non-Detects	30%
Mean Detects	110.2	SD Detects	123.2
Median Detects	42.4	CV Detects	1.118
Skewness Detects	0.844	Kurtosis Detects	-1.382
Mean of Logged Detects	3.901	SD of Logged Detects	1.511

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.8	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.28	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Approximate Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	77.29	KM Standard Error of Mean	36.84
KM SD	107.8	95% KM (BCA) UCL	136.7
95% KM (t) UCL	144.8	95% KM (Percentile Bootstrap) UCL	136
95% KM (z) UCL	137.9	95% KM Bootstrap t UCL	219.3
90% KM Chebyshev UCL	187.8	95% KM Chebyshev UCL	237.9
97.5% KM Chebyshev UCL	307.3	99% KM Chebyshev UCL	443.8

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.418	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.736	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.221	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.323	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.747	k star (bias corrected MLE)	0.522
Theta hat (MLE)	147.4	Theta star (bias corrected MLE)	210.9
nu hat (MLE)	10.46	nu star (bias corrected)	7.313
Mean (detects)	110.2		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	77.14
Maximum	291	Median	16.35
SD	113.8	CV	1.475
k hat (MLE)	0.239	k star (bias corrected MLE)	0.234
Theta hat (MLE)	323	Theta star (bias corrected MLE)	329.9
nu hat (MLE)	4.776	nu star (bias corrected)	4.677
Adjusted Level of Significance ( $\beta$ )	0.0267		
Approximate Chi Square Value (4.68, $\alpha$ )	1.006	Adjusted Chi Square Value (4.68, $\beta$ )	0.746
95% Gamma Approximate UCL (use when $n \geq 50$ )	358.7	95% Gamma Adjusted UCL (use when $n < 50$ )	483.3

**Human Health ProUCL Output  
Groundwater**

**Parcel E - Trichloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	77.29	SD (KM)	107.8
Variance (KM)	11631	SE of Mean (KM)	36.84
k hat (KM)	0.514	k star (KM)	0.426
nu hat (KM)	10.27	nu star (KM)	8.523
theta hat (KM)	150.5	theta star (KM)	181.4
80% gamma percentile (KM)	125.6	90% gamma percentile (KM)	215.8
95% gamma percentile (KM)	314.1	99% gamma percentile (KM)	559.8

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (8.52, $\alpha$ )	3.042	Adjusted Chi Square Value (8.52, $\beta$ )	2.501
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	216.6	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	263.4

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.915	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.187	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	77.53	Mean in Log Scale	2.741
SD in Original Scale	113.5	SD in Log Scale	2.276
95% t UCL (assumes normality of ROS data)	143.3	95% Percentile Bootstrap UCL	138.5
95% BCA Bootstrap UCL	150.4	95% Bootstrap t UCL	229.6
95% H-UCL (Log ROS)	20643		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	2.523	KM Geo Mean	12.46
KM SD (logged)	2.409	95% Critical H Value (KM-Log)	6.395
KM Standard Error of Mean (logged)	0.823	95% H-UCL (KM -Log)	38523
KM SD (logged)	2.409	95% Critical H Value (KM-Log)	6.395
KM Standard Error of Mean (logged)	0.823		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	77.21	Mean in Log Scale	2.315
SD in Original Scale	113.7	SD in Log Scale	2.836
95% t UCL (Assumes normality)	143.1	95% H-Stat UCL	651033

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Approximate Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	144.8
----------------	-------

When a data set follows an approximate (e.g., normal) distribution passing one of the GOF test

When applicable, it is suggested to use a UCL based upon a distribution (e.g., gamma) passing both GOF tests in ProUCL

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

Parcel E - Vinyl chloride

<b>General Statistics</b>			
Total Number of Observations	8	Number of Distinct Observations	4
Number of Detects	3	Number of Non-Detects	5
Number of Distinct Detects	3	Number of Distinct Non-Detects	1
Minimum Detect	0.022	Minimum Non-Detect	0.05
Maximum Detect	0.034	Maximum Non-Detect	0.05
Variance Detects	3.6000E-5	Percent Non-Detects	62.5%
Mean Detects	0.028	SD Detects	0.006
Median Detects	0.028	CV Detects	0.214
Skewness Detects	5.331E-15	Kurtosis Detects	N/A
Mean of Logged Detects	-3.591	SD of Logged Detects	0.218

**Warning: Data set has only 3 Detected Values.  
This is not enough to compute meaningful or reliable statistics and estimates.**

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	1	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.767	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.175	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.425	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	0.028	KM Standard Error of Mean	0.00346
KM SD	0.0049	95% KM (BCA) UCL	N/A
95% KM (t) UCL	0.0346	95% KM (Percentile Bootstrap) UCL	N/A
95% KM (z) UCL	0.0337	95% KM Bootstrap t UCL	N/A
90% KM Chebyshev UCL	0.0384	95% KM Chebyshev UCL	0.0431
97.5% KM Chebyshev UCL	0.0496	99% KM Chebyshev UCL	0.0625

**Gamma GOF Tests on Detected Observations Only**

**Not Enough Data to Perform GOF Test**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	32.08	k star (bias corrected MLE)	N/A
Theta hat (MLE)	8.7291E-4	Theta star (bias corrected MLE)	N/A
nu hat (MLE)	192.5	nu star (bias corrected)	N/A
Mean (detects)	0.028		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.0197	Mean	0.028
Maximum	0.0369	Median	0.0279
SD	0.00597	CV	0.213
k hat (MLE)	24.72	k star (bias corrected MLE)	15.53
Theta hat (MLE)	0.00113	Theta star (bias corrected MLE)	0.00181
nu hat (MLE)	395.6	nu star (bias corrected)	248.6
Adjusted Level of Significance ( $\beta$ )	0.0195		
Approximate Chi Square Value (248.55, $\alpha$ )	213.1	Adjusted Chi Square Value (248.55, $\beta$ )	204.7
95% Gamma Approximate UCL (use when $n \geq 50$ )	0.0327	95% Gamma Adjusted UCL (use when $n < 50$ )	N/A

**Human Health ProUCL Output  
Groundwater**

Parcel E - Vinyl chloride

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	0.028	SD (KM)	0.0049
Variance (KM)	2.4000E-5	SE of Mean (KM)	0.00346
k hat (KM)	32.67	k star (KM)	20.5
nu hat (KM)	522.7	nu star (KM)	328
theta hat (KM)	8.5714E-4	theta star (KM)	0.00137
80% gamma percentile (KM)	0.033	90% gamma percentile (KM)	0.0362
95% gamma percentile (KM)	0.0389	99% gamma percentile (KM)	0.0444

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (328.00, $\alpha$ )	287	Adjusted Chi Square Value (328.00, $\beta$ )	277.3
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	0.032	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	0.0331

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.996	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.767	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.195	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.425	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	0.0281	Mean in Log Scale	-3.591
SD in Original Scale	0.00605	SD in Log Scale	0.217
95% t UCL (assumes normality of ROS data)	0.0322	95% Percentile Bootstrap UCL	0.0314
95% BCA Bootstrap UCL	0.0314	95% Bootstrap t UCL	0.0327
95% H-UCL (Log ROS)	0.0331		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	-3.591	KM Geo Mean	0.0276
KM SD (logged)	0.178	95% Critical H Value (KM-Log)	1.921
KM Standard Error of Mean (logged)	0.126	95% H-UCL (KM -Log)	0.0319
KM SD (logged)	0.178	95% Critical H Value (KM-Log)	1.921
KM Standard Error of Mean (logged)	0.126		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	0.0261	Mean in Log Scale	-3.652
SD in Original Scale	0.00356	SD in Log Scale	0.127
95% t UCL (Assumes normality)	0.0285	95% H-Stat UCL	0.0286

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL    0.0346

**Warning: Recommended UCL exceeds the maximum observation**

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL. Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006). However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel F - cis-1,2-Dichloroethene**

**General Statistics**

Total Number of Observations	4	Number of Distinct Observations	4
		Number of Missing Observations	0
Minimum	0.927	Mean	33.54
Maximum	103	Median	15.12
SD	47.92	Std. Error of Mean	23.96
Coefficient of Variation	1.429	Skewness	1.637

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).**

**Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test**

Shapiro Wilk Test Statistic	0.804	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.748	Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.298	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.375	Data appear Normal at 5% Significance Level

**Data appear Normal at 5% Significance Level**

**Assuming Normal Distribution**

<b>95% Normal UCL</b>		<b>95% UCLs (Adjusted for Skewness)</b>	
95% Student's-t UCL	89.93	95% Adjusted-CLT UCL (Chen-1995)	93.9
		95% Modified-t UCL (Johnson-1978)	93.19

**Gamma GOF Test**

A-D Test Statistic	0.3	<b>Anderson-Darling Gamma GOF Test</b>
5% A-D Critical Value	0.683	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.279	<b>Kolmogorov-Smirnov Gamma GOF Test</b>
5% K-S Critical Value	0.411	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics**

k hat (MLE)	0.484	k star (bias corrected MLE)	0.288
Theta hat (MLE)	69.29	Theta star (bias corrected MLE)	116.6
nu hat (MLE)	3.873	nu star (bias corrected)	2.301
MLE Mean (bias corrected)	33.54	MLE Sd (bias corrected)	62.54
		Approximate Chi Square Value (0.05)	0.2
Adjusted Level of Significance	N/A	Adjusted Chi Square Value	N/A

**Assuming Gamma Distribution**

95% Approximate Gamma UCL (use when n>=50))	386.7	95% Adjusted Gamma UCL (use when n<50)	N/A
---	-------	--	-----

**Lognormal GOF Test**

Shapiro Wilk Test Statistic	0.943	<b>Shapiro Wilk Lognormal GOF Test</b>
5% Shapiro Wilk Critical Value	0.748	Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.226	<b>Lilliefors Lognormal GOF Test</b>
5% Lilliefors Critical Value	0.375	Data appear Lognormal at 5% Significance Level

**Data appear Lognormal at 5% Significance Level**

**Lognormal Statistics**

Minimum of Logged Data	-0.0758	Mean of logged Data	2.194
Maximum of Logged Data	4.635	SD of logged Data	2.167

**Assuming Lognormal Distribution**

95% H-UCL	4.802E+9	90% Chebyshev (MVUE) UCL	120.7
95% Chebyshev (MVUE) UCL	159.3	97.5% Chebyshev (MVUE) UCL	212.9
99% Chebyshev (MVUE) UCL	318.1		

Human Health ProUCL Output  
Groundwater

Parcel F - cis-1,2-Dichloroethene

Nonparametric Distribution Free UCL Statistics  
Data appear to follow a Discernible Distribution at 5% Significance Level

Nonparametric Distribution Free UCLs			
95% CLT UCL	72.95	95% Jackknife UCL	89.93
95% Standard Bootstrap UCL	N/A	95% Bootstrap-t UCL	N/A
95% Hall's Bootstrap UCL	N/A	95% Percentile Bootstrap UCL	N/A
95% BCA Bootstrap UCL	N/A		
90% Chebyshev(Mean, Sd) UCL	105.4	95% Chebyshev(Mean, Sd) UCL	138
97.5% Chebyshev(Mean, Sd) UCL	183.2	99% Chebyshev(Mean, Sd) UCL	271.9

Suggested UCL to Use

95% Student's-t UCL 89.93

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel F - Tetrachloroethene**

**General Statistics**

Total Number of Observations	12	Number of Distinct Observations	7
Number of Detects	5	Number of Non-Detects	7
Number of Distinct Detects	5	Number of Distinct Non-Detects	2
Minimum Detect	11.85	Minimum Non-Detect	0.5
Maximum Detect	460	Maximum Non-Detect	1
Variance Detects	49563	Percent Non-Detects	58.33%
Mean Detects	221.3	SD Detects	222.6
Median Detects	154	CV Detects	1.006
Skewness Detects	0.354	Kurtosis Detects	-3.096
Mean of Logged Detects	4.601	SD of Logged Detects	1.674

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.813	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.253	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.343	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	92.5	KM Standard Error of Mean	54.36
KM SD	168.4	95% KM (BCA) UCL	170.9
95% KM (t) UCL	190.1	95% KM (Percentile Bootstrap) UCL	172.3
95% KM (z) UCL	181.9	95% KM Bootstrap t UCL	275.3
90% KM Chebyshev UCL	255.6	95% KM Chebyshev UCL	329.5
97.5% KM Chebyshev UCL	432	99% KM Chebyshev UCL	633.4

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.423	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.698	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.259	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.367	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.75	k star (bias corrected MLE)	0.433
Theta hat (MLE)	295.1	Theta star (bias corrected MLE)	510.7
nu hat (MLE)	7.501	nu star (bias corrected)	4.334
Mean (detects)	221.3		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	92.22
Maximum	460	Median	0.01
SD	176.1	CV	1.91
k hat (MLE)	0.146	k star (bias corrected MLE)	0.165
Theta hat (MLE)	632.5	Theta star (bias corrected MLE)	559.2
nu hat (MLE)	3.499	nu star (bias corrected)	3.958
Adjusted Level of Significance ( $\beta$ )	0.029		
Approximate Chi Square Value (3.96, $\alpha$ )	0.705	Adjusted Chi Square Value (3.96, $\beta$ )	0.527
95% Gamma Approximate UCL (use when $n \geq 50$ )	517.7	95% Gamma Adjusted UCL (use when $n < 50$ )	692.4



**Human Health ProUCL Output  
Groundwater**

**Parcel F - Tetrachloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	92.5	SD (KM)	168.4
Variance (KM)	28372	SE of Mean (KM)	54.36
k hat (KM)	0.302	k star (KM)	0.282
nu hat (KM)	7.239	nu star (KM)	6.762
theta hat (KM)	306.7	theta star (KM)	328.3
80% gamma percentile (KM)	139.5	90% gamma percentile (KM)	274.8
95% gamma percentile (KM)	431.7	99% gamma percentile (KM)	842.7

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (6.76, $\alpha$ )	2.041	Adjusted Chi Square Value (6.76, $\beta$ )	1.67
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	306.5	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	374.7

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.872	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.218	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.343	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	92.9	Mean in Log Scale	1.494
SD in Original Scale	175.7	SD in Log Scale	3.175
95% t UCL (assumes normality of ROS data)	184	95% Percentile Bootstrap UCL	180.3
95% BCA Bootstrap UCL	206.5	95% Bootstrap t UCL	398
95% H-UCL (Log ROS)	982283		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	1.513	KM Geo Mean	4.54
KM SD (logged)	2.783	95% Critical H Value (KM-Log)	6.702
KM Standard Error of Mean (logged)	0.898	95% H-UCL (KM -Log)	60533
KM SD (logged)	2.783	95% Critical H Value (KM-Log)	6.702
KM Standard Error of Mean (logged)	0.898		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	92.48	Mean in Log Scale	1.455
SD in Original Scale	175.9	SD in Log Scale	2.961
95% t UCL (Assumes normality)	183.7	95% H-Stat UCL	195372

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	190.1
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

**Parcel F - Trichloroethene**

**General Statistics**

Total Number of Observations	12	Number of Distinct Observations	8
Number of Detects	7	Number of Non-Detects	5
Number of Distinct Detects	7	Number of Distinct Non-Detects	1
Minimum Detect	1.55	Minimum Non-Detect	1
Maximum Detect	510	Maximum Non-Detect	1
Variance Detects	33401	Percent Non-Detects	41.67%
Mean Detects	174.9	SD Detects	182.8
Median Detects	200	CV Detects	1.045
Skewness Detects	0.96	Kurtosis Detects	0.791
Mean of Logged Detects	3.983	SD of Logged Detects	2.247

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.871	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.211	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	102.5	KM Standard Error of Mean	48.36
KM SD	155.1	95% KM (BCA) UCL	181.7
95% KM (t) UCL	189.3	95% KM (Percentile Bootstrap) UCL	180.6
95% KM (z) UCL	182	95% KM Bootstrap t UCL	232.5
90% KM Chebyshev UCL	247.5	95% KM Chebyshev UCL	313.2
97.5% KM Chebyshev UCL	404.4	99% KM Chebyshev UCL	583.6

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.447	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.75	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.283	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.327	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.533	k star (bias corrected MLE)	0.4
Theta hat (MLE)	328.5	Theta star (bias corrected MLE)	437.8
nu hat (MLE)	7.455	nu star (bias corrected)	5.594
Mean (detects)	174.9		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	102
Maximum	510	Median	2.985
SD	162.3	CV	1.59
k hat (MLE)	0.178	k star (bias corrected MLE)	0.189
Theta hat (MLE)	574.6	Theta star (bias corrected MLE)	540.7
nu hat (MLE)	4.262	nu star (bias corrected)	4.53
Adjusted Level of Significance ( $\beta$ )	0.029		
Approximate Chi Square Value (4.53, $\alpha$ )	0.941	Adjusted Chi Square Value (4.53, $\beta$ )	0.721
95% Gamma Approximate UCL (use when $n \geq 50$ )	491	95% Gamma Adjusted UCL (use when $n < 50$ )	640.7

**Human Health ProUCL Output  
Groundwater**

Parcel F - Trichloroethene

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	102.5	SD (KM)	155.1
Variance (KM)	24053	SE of Mean (KM)	48.36
k hat (KM)	0.436	k star (KM)	0.383
nu hat (KM)	10.47	nu star (KM)	9.189
theta hat (KM)	234.8	theta star (KM)	267.6
80% gamma percentile (KM)	164.5	90% gamma percentile (KM)	291.6
95% gamma percentile (KM)	432.2	99% gamma percentile (KM)	787.3

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (9.19, $\alpha$ )	3.441	Adjusted Chi Square Value (9.19, $\beta$ )	2.926
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	273.6	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	321.8

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.861	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.292	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	102.2	Mean in Log Scale	1.59
SD in Original Scale	162.2	SD in Log Scale	3.533
95% t UCL (assumes normality of ROS data)	186.3	95% Percentile Bootstrap UCL	180.7
95% BCA Bootstrap UCL	202.1	95% Bootstrap t UCL	243.7
95% H-UCL (Log ROS)	19438461		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	2.323	KM Geo Mean	10.21
KM SD (logged)	2.526	95% Critical H Value (KM-Log)	6.125
KM Standard Error of Mean (logged)	0.788	95% H-UCL (KM -Log)	26311
KM SD (logged)	2.526	95% Critical H Value (KM-Log)	6.125
KM Standard Error of Mean (logged)	0.788		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	102.2	Mean in Log Scale	2.035
SD in Original Scale	162.1	SD in Log Scale	2.924
95% t UCL (Assumes normality)	186.3	95% H-Stat UCL	268195

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	189.3
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Groundwater**

Parcel F - Vinyl chloride

**General Statistics**

Total Number of Observations	4	Number of Distinct Observations	4
Number of Detects	2	Number of Non-Detects	2
Number of Distinct Detects	2	Number of Distinct Non-Detects	2
Minimum Detect	0.024	Minimum Non-Detect	1
Maximum Detect	0.18	Maximum Non-Detect	2.5
Variance Detects	0.0122	Percent Non-Detects	50%
Mean Detects	0.102	SD Detects	0.11
Median Detects	0.102	CV Detects	1.081
Skewness Detects	N/A	Kurtosis Detects	N/A
Mean of Logged Detects	-2.722	SD of Logged Detects	1.425

**Warning: Data set has only 2 Detected Values.  
This is not enough to compute meaningful or reliable statistics and estimates.**

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only  
Not Enough Data to Perform GOF Test**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	0.102	KM Standard Error of Mean	0.078
KM SD	0.078	95% KM (BCA) UCL	N/A
95% KM (t) UCL	0.286	95% KM (Percentile Bootstrap) UCL	N/A
95% KM (z) UCL	0.23	95% KM Bootstrap t UCL	N/A
90% KM Chebyshev UCL	0.336	95% KM Chebyshev UCL	0.442
97.5% KM Chebyshev UCL	0.589	99% KM Chebyshev UCL	0.878

**Gamma GOF Tests on Detected Observations Only  
Not Enough Data to Perform GOF Test**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	1.279	k star (bias corrected MLE)	N/A
Theta hat (MLE)	0.0798	Theta star (bias corrected MLE)	N/A
nu hat (MLE)	5.115	nu star (bias corrected)	N/A
Mean (detects)	0.102		

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	0.102	SD (KM)	0.078
Variance (KM)	0.00608	SE of Mean (KM)	0.078
k hat (KM)	1.71	k star (KM)	0.594
nu hat (KM)	13.68	nu star (KM)	4.753
theta hat (KM)	0.0596	theta star (KM)	0.172
80% gamma percentile (KM)	0.168	90% gamma percentile (KM)	0.266
95% gamma percentile (KM)	0.368	99% gamma percentile (KM)	0.616

**Gamma Kaplan-Meier (KM) Statistics**

		Adjusted Level of Significance ( $\beta$ )	0.00498
Approximate Chi Square Value (4.75, $\alpha$ )	1.04	Adjusted Chi Square Value (4.75, $\beta$ )	0.372
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	0.466	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	1.302

**Lognormal GOF Test on Detected Observations Only  
Not Enough Data to Perform GOF Test**

**Human Health ProUCL Output  
Groundwater**

**Parcel F - Vinyl chloride**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	0.0839	Mean in Log Scale	-2.722
SD in Original Scale	0.067	SD in Log Scale	0.823
95% t UCL (assumes normality of ROS data)	0.163	95% Percentile Bootstrap UCL	N/A
95% BCA Bootstrap UCL	N/A	95% Bootstrap t UCL	N/A
95% H-UCL (Log ROS)	1.289		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	-2.722	KM Geo Mean	0.0657
KM SD (logged)	1.007	95% Critical H Value (KM-Log)	6.716
KM Standard Error of Mean (logged)	1.007	95% H-UCL (KM -Log)	5.429
KM SD (logged)	1.007	95% Critical H Value (KM-Log)	6.716
KM Standard Error of Mean (logged)	1.007		

**DL/2 Statistics**

**DL/2 Normal**

Mean in Original Scale	0.489
SD in Original Scale	0.545
95% t UCL (Assumes normality)	1.13

**DL/2 Log-Transformed**

Mean in Log Scale	-1.479
SD in Log Scale	1.697
95% H-Stat UCL	52988

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Data do not follow a Discernible Distribution at 5% Significance Level**

**Suggested UCL to Use**

95% KM (Chebyshev) UCL	0.442
------------------------	-------

**Warning: Recommended UCL exceeds the maximum observation**

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**UCL Statistics for Data Sets with Non-Detects**

User Selected Options

Date/Time of Computation ProUCL 5.17/10/2018 2:35:41 PM  
 From File Input GW Plumes VI.xls  
 Full Precision OFF  
 Confidence Coefficient 95%  
 Number of Bootstrap Operations 2000

**Parcel A - Tetrachloroethene**

**General Statistics**

Total Number of Observations	16	Number of Distinct Observations	13
Number of Detects	12	Number of Non-Detects	4
Number of Distinct Detects	12	Number of Distinct Non-Detects	1
Minimum Detect	0.863	Minimum Non-Detect	1
Maximum Detect	40000	Maximum Non-Detect	1
Variance Detects	1.308E+8	Percent Non-Detects	25%
Mean Detects	3734	SD Detects	11438
Median Detects	97.85	CV Detects	3.063
Skewness Detects	3.445	Kurtosis Detects	11.9
Mean of Logged Detects	4.933	SD of Logged Detects	2.921

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.367	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.859	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.484	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.243	Detected Data Not Normal at 5% Significance Level

**Detected Data Not Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	2801	KM Standard Error of Mean	2512
KM SD	9621	95% KM (BCA) UCL	7836
95% KM (t) UCL	7205	95% KM (Percentile Bootstrap) UCL	7750
95% KM (z) UCL	6933	95% KM Bootstrap t UCL	64534
90% KM Chebyshev UCL	10337	95% KM Chebyshev UCL	13751
97.5% KM Chebyshev UCL	18489	99% KM Chebyshev UCL	27797

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	1.17	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.862	Detected Data Not Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.299	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.271	Detected Data Not Gamma Distributed at 5% Significance Level

**Detected Data Not Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.22	k star (bias corrected MLE)	0.221
Theta hat (MLE)	16958	Theta star (bias corrected MLE)	16919
nu hat (MLE)	5.285	nu star (bias corrected)	5.297
Mean (detects)	3734		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
 GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)  
 For such situations, GROS method may yield incorrect values of UCLs and BTVs  
 This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	2801
Maximum	40000	Median	75.65
SD	9937	CV	3.548

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel A - Tetrachloroethene**

k hat (MLE)	0.144	k star (bias corrected MLE)	0.158
Theta hat (MLE)	19511	Theta star (bias corrected MLE)	17692
nu hat (MLE)	4.593	nu star (bias corrected)	5.065
Adjusted Level of Significance ( $\beta$ )	0.0335		
Approximate Chi Square Value (5.07, $\alpha$ )	1.182	Adjusted Chi Square Value (5.07, $\beta$ )	0.986
95% Gamma Approximate UCL (use when $n \geq 50$ )	11997	95% Gamma Adjusted UCL (use when $n < 50$ )	14393

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	2801	SD (KM)	9621
Variance (KM)	92564463	SE of Mean (KM)	2512
k hat (KM)	0.0847	k star (KM)	0.111
nu hat (KM)	2.712	nu star (KM)	3.537
theta hat (KM)	33050	theta star (KM)	25342
80% gamma percentile (KM)	2226	90% gamma percentile (KM)	7739
95% gamma percentile (KM)	16130	99% gamma percentile (KM)	42295

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (3.54, $\alpha$ )	0.548	Adjusted Chi Square Value (3.54, $\beta$ )	0.435
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	18085	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	22757
95% Gamma Adjusted KM-UCL (use when $k \leq 1$ and $15 < n < 50$ )			

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.947	<b>Shapiro Wilk GOF Test</b>	
5% Shapiro Wilk Critical Value	0.859	Detected Data appear Lognormal at 5% Significance Level	
Lilliefors Test Statistic	0.187	<b>Lilliefors GOF Test</b>	
5% Lilliefors Critical Value	0.243	Detected Data appear Lognormal at 5% Significance Level	

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	2801	Mean in Log Scale	3.54
SD in Original Scale	9937	SD in Log Scale	3.591
95% t UCL (assumes normality of ROS data)	7156	95% Percentile Bootstrap UCL	7682
95% BCA Bootstrap UCL	10300	95% Bootstrap t UCL	63737
95% H-UCL (Log ROS)	25178456		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	3.663	KM Geo Mean	38.99
KM SD (logged)	3.272	95% Critical H Value (KM-Log)	6.965
KM Standard Error of Mean (logged)	0.854	95% H-UCL (KM -Log)	2960635
KM SD (logged)	3.272	95% Critical H Value (KM-Log)	6.965
KM Standard Error of Mean (logged)	0.854		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	2801	Mean in Log Scale	3.527
SD in Original Scale	9937	SD in Log Scale	3.548
95% t UCL (Assumes normality)	7155	95% H-Stat UCL	18069242

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Lognormal Distributed at 5% Significance Level**

**Suggested UCL to Use**

99% KM (Chebyshev) UCL 27797

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel A - Trichloroethene**

**General Statistics**

Total Number of Observations	16	Number of Distinct Observations	12
Number of Detects	11	Number of Non-Detects	5
Number of Distinct Detects	11	Number of Distinct Non-Detects	1
Minimum Detect	0.751	Minimum Non-Detect	1
Maximum Detect	46	Maximum Non-Detect	1
Variance Detects	309.8	Percent Non-Detects	31.25%
Mean Detects	17.8	SD Detects	17.6
Median Detects	13.5	CV Detects	0.989
Skewness Detects	0.518	Kurtosis Detects	-1.622
Mean of Logged Detects	2.03	SD of Logged Detects	1.642

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.839	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.85	Detected Data Not Normal at 5% Significance Level
Lilliefors Test Statistic	0.205	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.251	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Approximate Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	12.5	KM Standard Error of Mean	4.191
KM SD	15.98	95% KM (BCA) UCL	19.62
95% KM (t) UCL	19.84	95% KM (Percentile Bootstrap) UCL	19.24
95% KM (z) UCL	19.39	95% KM Bootstrap t UCL	22.23
90% KM Chebyshev UCL	25.07	95% KM Chebyshev UCL	30.76
97.5% KM Chebyshev UCL	38.67	99% KM Chebyshev UCL	54.2

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.552	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.765	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.21	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.266	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.71	k star (bias corrected MLE)	0.577
Theta hat (MLE)	25.06	Theta star (bias corrected MLE)	30.83
nu hat (MLE)	15.63	nu star (bias corrected)	12.7
Mean (detects)	17.8		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs

GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	12.63
Maximum	46	Median	3.739
SD	16.44	CV	1.302
k hat (MLE)	0.385	k star (bias corrected MLE)	0.355
Theta hat (MLE)	32.76	Theta star (bias corrected MLE)	35.59
nu hat (MLE)	12.34	nu star (bias corrected)	11.36
Adjusted Level of Significance ( $\beta$ )	0.0335		
Approximate Chi Square Value (11.36, $\alpha$ )	4.806	Adjusted Chi Square Value (11.36, $\beta$ )	4.33
95% Gamma Approximate UCL (use when $n \geq 50$ )	29.84	95% Gamma Adjusted UCL (use when $n < 50$ )	33.12



**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel A - Trichloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	12.5	SD (KM)	15.98
Variance (KM)	255.5	SE of Mean (KM)	4.191
k hat (KM)	0.611	k star (KM)	0.538
nu hat (KM)	19.56	nu star (KM)	17.23
theta hat (KM)	20.44	theta star (KM)	23.21
80% gamma percentile (KM)	20.57	90% gamma percentile (KM)	33.29
95% gamma percentile (KM)	46.75	99% gamma percentile (KM)	79.65

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (17.23, $\alpha$ )	8.834	Adjusted Chi Square Value (17.23, $\beta$ )	8.157
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	24.37	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	26.39

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.859	<b>Shapiro Wilk GOF Test</b>	
5% Shapiro Wilk Critical Value	0.85	Detected Data appear Lognormal at 5% Significance Level	
Lilliefors Test Statistic	0.187	<b>Lilliefors GOF Test</b>	
5% Lilliefors Critical Value	0.251	Detected Data appear Lognormal at 5% Significance Level	

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	12.63	Mean in Log Scale	1.385
SD in Original Scale	16.41	SD in Log Scale	1.726
95% t UCL (assumes normality of ROS data)	19.82	95% Percentile Bootstrap UCL	19.89
95% BCA Bootstrap UCL	20.41	95% Bootstrap t UCL	21.95
95% H-UCL (Log ROS)	103.3		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	1.337	KM Geo Mean	3.806
KM SD (logged)	1.657	95% Critical H Value (KM-Log)	3.828
KM Standard Error of Mean (logged)	0.435	95% H-UCL (KM -Log)	77.25
KM SD (logged)	1.657	95% Critical H Value (KM-Log)	3.828
KM Standard Error of Mean (logged)	0.435		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	12.39	Mean in Log Scale	1.179
SD in Original Scale	16.59	SD in Log Scale	1.87
95% t UCL (Assumes normality)	19.66	95% H-Stat UCL	143.6

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Approximate Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	19.84
----------------	-------

When a data set follows an approximate (e.g., normal) distribution passing one of the GOF test

When applicable, it is suggested to use a UCL based upon a distribution (e.g., gamma) passing both GOF tests in ProUCL

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

Human Health ProUCL Output  
Vapor Intrusion from Groundwater

Parcel B - Trichloroethene

General Statistics			
Total Number of Observations	3	Number of Distinct Observations	2
Number of Detects	1	Number of Non-Detects	2
Number of Distinct Detects	1	Number of Distinct Non-Detects	1

**Warning: Only one distinct data value was detected! ProUCL (or any other software) should not be used on such a data set!**  
It is suggested to use alternative site specific values determined by the Project Team to estimate environmental parameters (e.g., EPC, BTV).

The data set for variable Parcel B - Trichloroethene was not processed!

Human Health ProUCL Output  
Vapor Intrusion from Groundwater

Parcel C - Trichloroethene

General Statistics			
Total Number of Observations	1	Number of Distinct Observations	1
		Number of Missing Observations	0
Minimum	4.43	Mean	4.43
Maximum	4.43	Median	4.43

**Warning: This data set only has 1 observations!**

**Data set is too small to compute reliable and meaningful statistics and estimates!**

**The data set for variable Parcel C - Trichloroethene was not processed!**

**It is suggested to collect at least 8 to 10 observations before using these statistical methods!  
If possible, compute and collect Data Quality Objectives (DQO) based sample size and analytical results.**

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel D - Trichloroethene**

**General Statistics**

Total Number of Observations	3	Number of Distinct Observations	3
Number of Detects	2	Number of Non-Detects	1
Number of Distinct Detects	2	Number of Distinct Non-Detects	1
Minimum Detect	8.1	Minimum Non-Detect	1
Maximum Detect	9.02	Maximum Non-Detect	1
Variance Detects	0.423	Percent Non-Detects	33.33%
Mean Detects	8.56	SD Detects	0.651
Median Detects	8.56	CV Detects	0.076
Skewness Detects	N/A	Kurtosis Detects	N/A
Mean of Logged Detects	2.146	SD of Logged Detects	0.0761

**Warning: Data set has only 2 Detected Values.**

**This is not enough to compute meaningful or reliable statistics and estimates.**

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).**

**Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

**Not Enough Data to Perform GOF Test**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	6.04	KM Standard Error of Mean	2.926
KM SD	3.584	95% KM (BCA) UCL	N/A
95% KM (t) UCL	14.58	95% KM (Percentile Bootstrap) UCL	N/A
95% KM (z) UCL	10.85	95% KM Bootstrap t UCL	N/A
90% KM Chebyshev UCL	14.82	95% KM Chebyshev UCL	18.79
97.5% KM Chebyshev UCL	24.31	99% KM Chebyshev UCL	35.15

**Gamma GOF Tests on Detected Observations Only**

**Not Enough Data to Perform GOF Test**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	345.9	k star (bias corrected MLE)	N/A
Theta hat (MLE)	0.0247	Theta star (bias corrected MLE)	N/A
nu hat (MLE)	1384	nu star (bias corrected)	N/A
Mean (detects)	8.56		

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	6.04	SD (KM)	3.584
Variance (KM)	12.84	SE of Mean (KM)	2.926
k hat (KM)	2.841	k star (KM)	N/A
nu hat (KM)	17.04	nu star (KM)	N/A
theta hat (KM)	2.126	theta star (KM)	N/A
80% gamma percentile (KM)	N/A	90% gamma percentile (KM)	N/A
95% gamma percentile (KM)	N/A	99% gamma percentile (KM)	N/A

**Gamma Kaplan-Meier (KM) Statistics**

		Adjusted Level of Significance ( $\beta$ )	0.00136
Approximate Chi Square Value (N/A, $\alpha$ )	N/A	Adjusted Chi Square Value (N/A, $\beta$ )	N/A
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	N/A	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	N/A

**Lognormal GOF Test on Detected Observations Only**

**Not Enough Data to Perform GOF Test**

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel D - Trichloroethene**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	7.938	Mean in Log Scale	2.064
SD in Original Scale	1.171	SD in Log Scale	0.151
95% t UCL (assumes normality of ROS data)	9.913	95% Percentile Bootstrap UCL	N/A
95% BCA Bootstrap UCL	N/A	95% Bootstrap t UCL	N/A
95% H-UCL (Log ROS)	10.97		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	1.43	KM Geo Mean	4.181
KM SD (logged)	1.012	95% Critical H Value (KM-Log)	13.21
KM Standard Error of Mean (logged)	0.827	95% H-UCL (KM -Log)	89492
KM SD (logged)	1.012	95% Critical H Value (KM-Log)	13.21
KM Standard Error of Mean (logged)	0.827		

**DL/2 Statistics**

**DL/2 Normal**

Mean in Original Scale	5.873
SD in Original Scale	4.676
95% t UCL (Assumes normality)	13.76

**DL/2 Log-Transformed**

Mean in Log Scale	1.199
SD in Log Scale	1.64
95% H-Stat UCL	7.879E+11

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Data do not follow a Discernible Distribution at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	14.58	KM H-UCL	89492
95% KM (BCA) UCL	N/A		

**Warning: One or more Recommended UCL(s) not available!**

**Warning: Recommended UCL exceeds the maximum observation**

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel E - Trichloroethene**

**General Statistics**

Total Number of Observations	6	Number of Distinct Observations	6
		Number of Missing Observations	0
Minimum	6.26	Mean	126
Maximum	291	Median	86.7
SD	127	Std. Error of Mean	51.83
Coefficient of Variation	1.008	Skewness	0.553

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).**

**Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test**

Shapiro Wilk Test Statistic	0.847	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.788	Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.245	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.325	Data appear Normal at 5% Significance Level

**Data appear Normal at 5% Significance Level**

**Assuming Normal Distribution**

<b>95% Normal UCL</b>		<b>95% UCLs (Adjusted for Skewness)</b>	
95% Student's-t UCL	230.4	95% Adjusted-CLT UCL (Chen-1995)	223.7
		95% Modified-t UCL (Johnson-1978)	232.4

**Gamma GOF Test**

A-D Test Statistic	0.318	<b>Anderson-Darling Gamma GOF Test</b>
5% A-D Critical Value	0.72	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.203	<b>Kolmogorov-Smirnov Gamma GOF Test</b>
5% K-S Critical Value	0.343	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics**

k hat (MLE)	0.799	k star (bias corrected MLE)	0.511
Theta hat (MLE)	157.6	Theta star (bias corrected MLE)	246.6
nu hat (MLE)	9.591	nu star (bias corrected)	6.129
MLE Mean (bias corrected)	126	MLE Sd (bias corrected)	176.3
		Approximate Chi Square Value (0.05)	1.706
Adjusted Level of Significance	0.0122	Adjusted Chi Square Value	0.997

**Assuming Gamma Distribution**

95% Approximate Gamma UCL (use when n>=50))	452.5	95% Adjusted Gamma UCL (use when n<50)	774.5
---	-------	--	-------

**Lognormal GOF Test**

Shapiro Wilk Test Statistic	0.918	<b>Shapiro Wilk Lognormal GOF Test</b>
5% Shapiro Wilk Critical Value	0.788	Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.192	<b>Lilliefors Lognormal GOF Test</b>
5% Lilliefors Critical Value	0.325	Data appear Lognormal at 5% Significance Level

**Data appear Lognormal at 5% Significance Level**

**Lognormal Statistics**

Minimum of Logged Data	1.834	Mean of logged Data	4.093
Maximum of Logged Data	5.673	SD of logged Data	1.559

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel E - Trichloroethene**

**Assuming Lognormal Distribution**

95% H-UCL	14101	90% Chebyshev (MVUE) UCL	409.8
95% Chebyshev (MVUE) UCL	528.7	97.5% Chebyshev (MVUE) UCL	693.8
99% Chebyshev (MVUE) UCL	1018		

**Nonparametric Distribution Free UCL Statistics**

**Data appear to follow a Discernible Distribution at 5% Significance Level**

**Nonparametric Distribution Free UCLs**

95% CLT UCL	211.2	95% Jackknife UCL	230.4
95% Standard Bootstrap UCL	202.5	95% Bootstrap-t UCL	278.9
95% Hall's Bootstrap UCL	255.3	95% Percentile Bootstrap UCL	207.2
95% BCA Bootstrap UCL	211		
90% Chebyshev(Mean, Sd) UCL	281.5	95% Chebyshev(Mean, Sd) UCL	351.9
97.5% Chebyshev(Mean, Sd) UCL	449.7	99% Chebyshev(Mean, Sd) UCL	641.7

**Suggested UCL to Use**

95% Student's-t UCL	230.4
---------------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulation results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel F - Tetrachloroethene**

**General Statistics**

Total Number of Observations	9	Number of Distinct Observations	7
Number of Detects	5	Number of Non-Detects	4
Number of Distinct Detects	5	Number of Distinct Non-Detects	2
Minimum Detect	11.85	Minimum Non-Detect	0.5
Maximum Detect	460	Maximum Non-Detect	1
Variance Detects	49563	Percent Non-Detects	44.44%
Mean Detects	221.3	SD Detects	222.6
Median Detects	154	CV Detects	1.006
Skewness Detects	0.354	Kurtosis Detects	-3.096
Mean of Logged Detects	4.601	SD of Logged Detects	1.674

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.813	<b>Shapiro Wilk GOF Test</b>	
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Normal at 5% Significance Level	
Lilliefors Test Statistic	0.253	<b>Lilliefors GOF Test</b>	
5% Lilliefors Critical Value	0.343	Detected Data appear Normal at 5% Significance Level	

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	123.2	KM Standard Error of Mean	68.79
KM SD	184.6	95% KM (BCA) UCL	224.8
95% KM (t) UCL	251.1	95% KM (Percentile Bootstrap) UCL	224.2
95% KM (z) UCL	236.3	95% KM Bootstrap t UCL	372.8
90% KM Chebyshev UCL	329.5	95% KM Chebyshev UCL	423
97.5% KM Chebyshev UCL	552.7	99% KM Chebyshev UCL	807.6

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.423	<b>Anderson-Darling GOF Test</b>	
5% A-D Critical Value	0.698	Detected data appear Gamma Distributed at 5% Significance Level	
K-S Test Statistic	0.259	<b>Kolmogorov-Smirnov GOF</b>	
5% K-S Critical Value	0.367	Detected data appear Gamma Distributed at 5% Significance Level	

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.75	k star (bias corrected MLE)	0.433
Theta hat (MLE)	295.1	Theta star (bias corrected MLE)	510.7
nu hat (MLE)	7.501	nu star (bias corrected)	4.334
Mean (detects)	221.3		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	123
Maximum	460	Median	11.85
SD	195.9	CV	1.593
k hat (MLE)	0.175	k star (bias corrected MLE)	0.191
Theta hat (MLE)	704	Theta star (bias corrected MLE)	645.4
nu hat (MLE)	3.144	nu star (bias corrected)	3.429
Adjusted Level of Significance ( $\beta$ )	0.0231		
Approximate Chi Square Value (3.43, $\alpha$ )	0.51	Adjusted Chi Square Value (3.43, $\beta$ )	0.329
95% Gamma Approximate UCL (use when $n \geq 50$ )	826.5	95% Gamma Adjusted UCL (use when $n < 50$ )	1283



**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

**Parcel F - Tetrachloroethene**

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	123.2	SD (KM)	184.6
Variance (KM)	34067	SE of Mean (KM)	68.79
k hat (KM)	0.445	k star (KM)	0.371
nu hat (KM)	8.016	nu star (KM)	6.677
theta hat (KM)	276.6	theta star (KM)	332
80% gamma percentile (KM)	196.8	90% gamma percentile (KM)	352.4
95% gamma percentile (KM)	525.2	99% gamma percentile (KM)	963.2

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (6.68, $\alpha$ )	1.995	Adjusted Chi Square Value (6.68, $\beta$ )	1.502
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	412.2	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	547.6

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.872	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.762	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.218	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.343	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	123.6	Mean in Log Scale	2.539
SD in Original Scale	195.5	SD in Log Scale	2.791
95% t UCL (assumes normality of ROS data)	244.7	95% Percentile Bootstrap UCL	226
95% BCA Bootstrap UCL	243.3	95% Bootstrap t UCL	512.6
95% H-UCL (Log ROS)	1359324		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	2.248	KM Geo Mean	9.472
KM SD (logged)	2.858	95% Critical H Value (KM-Log)	7.97
KM Standard Error of Mean (logged)	1.065	95% H-UCL (KM -Log)	1766374
KM SD (logged)	2.858	95% Critical H Value (KM-Log)	7.97
KM Standard Error of Mean (logged)	1.065		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	123.1	Mean in Log Scale	2.171
SD in Original Scale	195.8	SD in Log Scale	3.123
95% t UCL (Assumes normality)	244.5	95% H-Stat UCL	16626006

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	251.1
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

Parcel F - Trichloroethene

**General Statistics**

Total Number of Observations	9	Number of Distinct Observations	8
Number of Detects	7	Number of Non-Detects	2
Number of Distinct Detects	7	Number of Distinct Non-Detects	1
Minimum Detect	1.55	Minimum Non-Detect	1
Maximum Detect	510	Maximum Non-Detect	1
Variance Detects	33401	Percent Non-Detects	22.22%
Mean Detects	174.9	SD Detects	182.8
Median Detects	200	CV Detects	1.045
Skewness Detects	0.96	Kurtosis Detects	0.791
Mean of Logged Detects	3.983	SD of Logged Detects	2.247

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only**

Shapiro Wilk Test Statistic	0.871	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Normal at 5% Significance Level
Lilliefors Test Statistic	0.211	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Normal at 5% Significance Level

**Detected Data appear Normal at 5% Significance Level**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	136.3	KM Standard Error of Mean	59.7
KM SD	165.8	95% KM (BCA) UCL	237.1
95% KM (t) UCL	247.3	95% KM (Percentile Bootstrap) UCL	234.2
95% KM (z) UCL	234.5	95% KM Bootstrap t UCL	282.7
90% KM Chebyshev UCL	315.4	95% KM Chebyshev UCL	396.5
97.5% KM Chebyshev UCL	509.1	99% KM Chebyshev UCL	730.3

**Gamma GOF Tests on Detected Observations Only**

A-D Test Statistic	0.447	<b>Anderson-Darling GOF Test</b>
5% A-D Critical Value	0.75	Detected data appear Gamma Distributed at 5% Significance Level
K-S Test Statistic	0.283	<b>Kolmogorov-Smirnov GOF</b>
5% K-S Critical Value	0.327	Detected data appear Gamma Distributed at 5% Significance Level

**Detected data appear Gamma Distributed at 5% Significance Level**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	0.533	k star (bias corrected MLE)	0.4
Theta hat (MLE)	328.5	Theta star (bias corrected MLE)	437.8
nu hat (MLE)	7.455	nu star (bias corrected)	5.594
Mean (detects)	174.9		

**Gamma ROS Statistics using Imputed Non-Detects**

GROS may not be used when data set has > 50% NDs with many tied observations at multiple DLs  
GROS may not be used when kstar of detects is small such as <1.0, especially when the sample size is small (e.g., <15-20)

For such situations, GROS method may yield incorrect values of UCLs and BTVs

This is especially true when the sample size is small.

For gamma distributed detected data, BTVs and UCLs may be computed using gamma distribution on KM estimates

Minimum	0.01	Mean	136.1
Maximum	510	Median	32.5
SD	176.1	CV	1.294
k hat (MLE)	0.25	k star (bias corrected MLE)	0.241
Theta hat (MLE)	543.8	Theta star (bias corrected MLE)	564.8
nu hat (MLE)	4.504	nu star (bias corrected)	4.336
Adjusted Level of Significance ( $\beta$ )	0.0231		
Approximate Chi Square Value (4.34, $\alpha$ )	0.859	Adjusted Chi Square Value (4.34, $\beta$ )	0.585
95% Gamma Approximate UCL (use when $n \geq 50$ )	687	95% Gamma Adjusted UCL (use when $n < 50$ )	1009

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

Parcel F - Trichloroethene

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	136.3	SD (KM)	165.8
Variance (KM)	27496	SE of Mean (KM)	59.7
k hat (KM)	0.675	k star (KM)	0.524
nu hat (KM)	12.16	nu star (KM)	9.438
theta hat (KM)	201.8	theta star (KM)	259.9
80% gamma percentile (KM)	224.2	90% gamma percentile (KM)	365
95% gamma percentile (KM)	514.7	99% gamma percentile (KM)	881.1

**Gamma Kaplan-Meier (KM) Statistics**

Approximate Chi Square Value (9.44, $\alpha$ )	3.594	Adjusted Chi Square Value (9.44, $\beta$ )	2.875
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	357.9	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	447.4

**Lognormal GOF Test on Detected Observations Only**

Shapiro Wilk Test Statistic	0.861	<b>Shapiro Wilk GOF Test</b>
5% Shapiro Wilk Critical Value	0.803	Detected Data appear Lognormal at 5% Significance Level
Lilliefors Test Statistic	0.292	<b>Lilliefors GOF Test</b>
5% Lilliefors Critical Value	0.304	Detected Data appear Lognormal at 5% Significance Level

**Detected Data appear Lognormal at 5% Significance Level**

**Lognormal ROS Statistics Using Imputed Non-Detects**

Mean in Original Scale	136.1	Mean in Log Scale	2.82
SD in Original Scale	176	SD in Log Scale	3.037
95% t UCL (assumes normality of ROS data)	245.2	95% Percentile Bootstrap UCL	225.2
95% BCA Bootstrap UCL	252.4	95% Bootstrap t UCL	290.3
95% H-UCL (Log ROS)	14688357		

**Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution**

KM Mean (logged)	3.098	KM Geo Mean	22.15
KM SD (logged)	2.471	95% Critical H Value (KM-Log)	6.945
KM Standard Error of Mean (logged)	0.89	95% H-UCL (KM -Log)	202690
KM SD (logged)	2.471	95% Critical H Value (KM-Log)	6.945
KM Standard Error of Mean (logged)	0.89		

**DL/2 Statistics**

<b>DL/2 Normal</b>		<b>DL/2 Log-Transformed</b>	
Mean in Original Scale	136.2	Mean in Log Scale	2.944
SD in Original Scale	176	SD in Log Scale	2.835
95% t UCL (Assumes normality)	245.2	95% H-Stat UCL	2931251

**DL/2 is not a recommended method, provided for comparisons and historical reasons**

**Nonparametric Distribution Free UCL Statistics**

**Detected Data appear Normal Distributed at 5% Significance Level**

**Suggested UCL to Use**

95% KM (t) UCL	247.3
----------------	-------

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**Human Health ProUCL Output  
Vapor Intrusion from Groundwater**

Parcel F - Vinyl chloride

General Statistics			
Total Number of Observations	4	Number of Distinct Observations	4
Number of Detects	2	Number of Non-Detects	2
Number of Distinct Detects	2	Number of Distinct Non-Detects	2
Minimum Detect	0.024	Minimum Non-Detect	1
Maximum Detect	0.18	Maximum Non-Detect	2.5
Variance Detects	0.0122	Percent Non-Detects	50%
Mean Detects	0.102	SD Detects	0.11
Median Detects	0.102	CV Detects	1.081
Skewness Detects	N/A	Kurtosis Detects	N/A
Mean of Logged Detects	-2.722	SD of Logged Detects	1.425

**Warning: Data set has only 2 Detected Values.  
This is not enough to compute meaningful or reliable statistics and estimates.**

**Note: Sample size is small (e.g., <10), if data are collected using ISM approach, you should use guidance provided in ITRC Tech Reg Guide on ISM (ITRC, 2012) to compute statistics of interest.**

**For example, you may want to use Chebyshev UCL to estimate EPC (ITRC, 2012).  
Chebyshev UCL can be computed using the Nonparametric and All UCL Options of ProUCL 5.1**

**Normal GOF Test on Detects Only  
Not Enough Data to Perform GOF Test**

**Kaplan-Meier (KM) Statistics using Normal Critical Values and other Nonparametric UCLs**

KM Mean	0.102	KM Standard Error of Mean	0.078
KM SD	0.078	95% KM (BCA) UCL	N/A
95% KM (t) UCL	0.286	95% KM (Percentile Bootstrap) UCL	N/A
95% KM (z) UCL	0.23	95% KM Bootstrap t UCL	N/A
90% KM Chebyshev UCL	0.336	95% KM Chebyshev UCL	0.442
97.5% KM Chebyshev UCL	0.589	99% KM Chebyshev UCL	0.878

**Gamma GOF Tests on Detected Observations Only  
Not Enough Data to Perform GOF Test**

**Gamma Statistics on Detected Data Only**

k hat (MLE)	1.279	k star (bias corrected MLE)	N/A
Theta hat (MLE)	0.0798	Theta star (bias corrected MLE)	N/A
nu hat (MLE)	5.115	nu star (bias corrected)	N/A
Mean (detects)	0.102		

**Estimates of Gamma Parameters using KM Estimates**

Mean (KM)	0.102	SD (KM)	0.078
Variance (KM)	0.00608	SE of Mean (KM)	0.078
k hat (KM)	1.71	k star (KM)	0.594
nu hat (KM)	13.68	nu star (KM)	4.753
theta hat (KM)	0.0596	theta star (KM)	0.172
80% gamma percentile (KM)	0.168	90% gamma percentile (KM)	0.266
95% gamma percentile (KM)	0.368	99% gamma percentile (KM)	0.616

**Gamma Kaplan-Meier (KM) Statistics**

		Adjusted Level of Significance ( $\beta$ )	0.00498
Approximate Chi Square Value (4.75, $\alpha$ )	1.04	Adjusted Chi Square Value (4.75, $\beta$ )	0.372
95% Gamma Approximate KM-UCL (use when $n \geq 50$ )	0.466	95% Gamma Adjusted KM-UCL (use when $n < 50$ )	1.302

Human Health ProUCL Output  
Vapor Intrusion from Groundwater

Parcel F - Vinyl chloride

Lognormal GOF Test on Detected Observations Only  
Not Enough Data to Perform GOF Test

Lognormal ROS Statistics Using Imputed Non-Detects

Mean in Original Scale	0.0839	Mean in Log Scale	-2.722
SD in Original Scale	0.067	SD in Log Scale	0.823
95% t UCL (assumes normality of ROS data)	0.163	95% Percentile Bootstrap UCL	N/A
95% BCA Bootstrap UCL	N/A	95% Bootstrap t UCL	N/A
95% H-UCL (Log ROS)	1.289		

Statistics using KM estimates on Logged Data and Assuming Lognormal Distribution

KM Mean (logged)	-2.722	KM Geo Mean	0.0657
KM SD (logged)	1.007	95% Critical H Value (KM-Log)	6.716
KM Standard Error of Mean (logged)	1.007	95% H-UCL (KM -Log)	5.429
KM SD (logged)	1.007	95% Critical H Value (KM-Log)	6.716
KM Standard Error of Mean (logged)	1.007		

DL/2 Statistics

DL/2 Normal

Mean in Original Scale	0.489
SD in Original Scale	0.545
95% t UCL (Assumes normality)	1.13

DL/2 Log-Transformed

Mean in Log Scale	-1.479
SD in Log Scale	1.697
95% H-Stat UCL	52988

DL/2 is not a recommended method, provided for comparisons and historical reasons

Nonparametric Distribution Free UCL Statistics

Data do not follow a Discernible Distribution at 5% Significance Level

Suggested UCL to Use

95% KM (Chebyshev) UCL	0.442
------------------------	-------

Warning: Recommended UCL exceeds the maximum observation

Note: Suggestions regarding the selection of a 95% UCL are provided to help the user to select the most appropriate 95% UCL.

Recommendations are based upon data size, data distribution, and skewness.

These recommendations are based upon the results of the simulation studies summarized in Singh, Maichle, and Lee (2006).

However, simulations results will not cover all Real World data sets; for additional insight the user may want to consult a statistician.

**APPENDIX C**  
**DEVELOPMENT OF DERMAL ABSORPTION EXPOSURE IN GROUNDWATER AND TRENCH**  
**MODEL**

**Table C-1**  
**DA<sub>event</sub> Equations for Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

*For organics,*

$$\text{If } t_{event} \leq t^*, \text{ then : } DA_{event} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{event} \times t_{event}}{\pi}}$$

$$\text{If } t_{event} > t^*, \text{ then : } DA_{event} = FA \times K_p \times C_w \left[ \frac{t_{event}}{1+B} + 2\tau_{event} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$$

Parameter	Definition (Units)	Value	Source
<b>Organics</b>			
DA <sub>event</sub>	Dose absorbed per event (mg/cm <sup>2</sup> -event)	Chemical-specific	Calculated using Equations 3.2 or 3.3 (USEPA, July 2004).
FA	Fraction absorbed water (dimensionless)	Chemical-specific	Obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).
K <sub>p</sub>	Dermal permeability coefficient (cm/hr)	Chemical-specific	Obtained from Appendix B, Exhibit B-2 (USEPA, July 2004).
C <sub>w</sub>	Chemical concentration in water (mg/cm <sup>3</sup> )	Chemical-specific	Refer to Tables 15 and 17 for groundwater and surface water concentration, respectively.
τ <sub>event</sub>	Lag time per event (hr/event)	Chemical-specific	Calculated using Equation A.4 (USEPA, July 2004).
t <sub>event</sub>	Event duration (hr/event)	GW - Resident Adult: 0.71	Obtained from USEPA, April 2014.
		GW - Resident Child: 0.54	Obtained from USEPA, April 2014.
		GW - Age-Adjusted Resident Adult: 0.67	Age Adjusted, based on tevent of 0.54 for child and 0.71 for adult from USEPA 2014: ( (0.54*6) + (0.71*20) ) / 26
t*	Time to reach steady-state (hr)	Chemical-specific	Calculated using Equations A.5 or A.6 (USEPA, July 2004).
B	Kp stratum corneum: Kp viable epidermis (dimensionless)	Chemical-specific	Calculated using Equation A.1 (USEPA, July 2004).

**Table C-2**  
**Estimation of DA<sub>event</sub> - Lag Time per Event (τ<sub>event</sub>) for Dermal Contact with Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

$$\tau_{event} = \frac{l_{sc}^2}{6 * D_{sc}} = 0.105 * 10^{(0.0056 * MW)}$$

Used in calculation for τ <sub>event</sub> (Equation A.4 in USEPA 2004)	Molecular Weight <sup>1</sup> (g/mole)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	Apparent thickness of stratum corneum (cm)	Effective Diffusion Coefficient through Stratum Corneum (cm <sup>2</sup> /hr)	Lag Time per Event (hr/event)
Chemical	MW	Log Dsc/lsc	Dsc / lsc	lsc	Dsc	τ <sub>event</sub>
<b>Groundwater</b>						
<b>Parcel A</b>						
Tetrachloroethene	1.66E+02	-3.74E+00	1.83E-04	1.00E-03	1.83E-07	9.09E-01
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
<b>Parcel B</b>						
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
<b>Parcel C</b>						
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
<b>Parcel D</b>						
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
<b>Parcel E</b>						
cis-1,2-Dichloroethene	9.69E+01	-3.35E+00	4.48E-04	1.00E-03	4.48E-07	3.72E-01
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
Vinyl Chloride	6.25E+01	-3.16E+00	6.99E-04	1.00E-03	6.99E-07	2.39E-01
<b>Parcel F</b>						
cis-1,2-Dichloroethene	9.69E+01	-3.35E+00	4.48E-04	1.00E-03	4.48E-07	3.72E-01
Tetrachloroethene	1.66E+02	-3.74E+00	1.83E-04	1.00E-03	1.83E-07	9.09E-01
Trichloroethylene	1.31E+02	-3.54E+00	2.87E-04	1.00E-03	2.87E-07	5.81E-01
Vinyl Chloride	6.25E+01	-3.16E+00	6.99E-04	1.00E-03	6.99E-07	2.39E-01

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).



**Table C-3**  
**Estimation of DA<sub>event</sub> - Time to Reach Steady State for Dermal Contact with Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

If  $B \leq 0.6$ , then  $t^* = 2.4 * \tau_{event}$

If  $B > 0.6$ , then  $t^* = 6 * \tau_{event} (b - \sqrt{b^2 - c^2})$

$$b = \frac{2 * (1 + B)^2 - c}{\pi} \quad c = \frac{1 + 3B + 3B^2}{3 * (1 + B)}$$

Used in calculation for t* (Equation A.5 or A.6 in USEPA 2004). Also uses Equations A.7 and A.8 for b and c in USEPA 2004.	Permeability Constant <sup>1</sup> (cm/hr)	Molecular Weight <sup>1</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis (unitless)	Lag Time per Event (hr/event)	Formula Used	Time to reach steady state (hr)	Correlation Coefficients (unitless)	Correlation Coefficients (unitless)
Chemical	Kp	MW	B	$\tau_{event}$	Formula	t*	b	c
<b>Groundwater</b>								
<b>Parcel A</b>								
Tetrachloroethene	3.34E-02	1.66E+02	1.66E-01	9.09E-01	Eq. A.5	2.18E+00	4.13E-01	4.52E-01
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
<b>Parcel B</b>								
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
<b>Parcel C</b>								
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
<b>Parcel D</b>								
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
<b>Parcel E</b>								
cis-1,2-Dichloroethene	1.10E-02	9.69E+01	4.17E-02	3.72E-01	Eq. A.5	8.94E-01	3.29E-01	3.62E-01
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
Vinyl Chloride	8.38E-03	6.25E+01	2.55E-02	2.39E-01	Eq. A.5	5.73E-01	3.19E-01	3.51E-01
<b>Parcel F</b>								
cis-1,2-Dichloroethene	1.10E-02	9.69E+01	4.17E-02	3.72E-01	Eq. A.5	8.94E-01	3.29E-01	3.62E-01
Tetrachloroethene	3.34E-02	1.66E+02	1.66E-01	9.09E-01	Eq. A.5	2.18E+00	4.13E-01	4.52E-01
Trichloroethylene	1.16E-02	1.31E+02	5.11E-02	5.81E-01	Eq. A.5	1.39E+00	3.35E-01	3.68E-01
Vinyl Chloride	8.38E-03	6.25E+01	2.55E-02	2.39E-01	Eq. A.5	5.73E-01	3.19E-01	3.51E-01

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**Table C-4**  
**Estimation of DA<sub>event</sub> for Dermal Contact with Organics in Groundwater (Resident Adult)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

For organics,  
 If  $t_{event} \leq t^*$ , then:  $DA_{event} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{event} \times t_{event}}{\pi}}$   
 If  $t_{event} > t^*$ , then:  $DA_{event} = FA \times K_p \times C_w \left[ \frac{t_{event}}{1+B} + 2\tau_{event} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Concentration in Water <sup>3</sup> (mg/L)	Concentration in Water (mg/cm <sup>3</sup> )	Lag Time per Event <sup>4</sup> (hr/event)	Time to reach steady state <sup>5</sup> (hr)	Event Duration <sup>6</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>7</sup> (unitless)	Formula Used <sup>8,9</sup>	Absorbed Dose per Event <sup>8</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>9</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>10</sup> (mg/cm <sup>3</sup> -event)
Chemical	FA	Kp	Cw (mg/L)	Cw (mg/cm <sup>3</sup> )	$\tau_{event}$	$t^*$	$t_{event}$	MW	B	Formula	DA <sub>event</sub> (Eq. 3.2)	DA <sub>event</sub> (Eq. 3.3)	Final DA <sub>event</sub> Adult
<b>Groundwater</b>													
<b>Parcel A</b>													
Tetrachloroethene	1.00E+00	3.34E-02	1.22E+01	1.22E-02	9.09E-01	2.18E+00	7.10E-01	1.66E+02	1.66E-01	Eq. 3.2	9.07E-04	-	9.07E-04
Trichloroethylene	1.00E+00	1.16E-02	1.79E-02	1.79E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	3.68E-07	-	3.68E-07
<b>Parcel B</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.00E-02	1.00E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	2.06E-07	-	2.06E-07
<b>Parcel C</b>													
Trichloroethylene	1.00E+00	1.16E-02	4.43E-03	4.43E-06	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	9.12E-08	-	9.12E-08
<b>Parcel D</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.98E-02	1.98E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	4.07E-07	-	4.07E-07
<b>Parcel E</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	4.37E-03	4.37E-06	3.72E-01	8.94E-01	7.10E-01	9.69E+01	4.17E-02	Eq. 3.2	6.83E-08	-	6.83E-08
Trichloroethylene	1.00E+00	1.16E-02	1.45E-01	1.45E-04	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	2.98E-06	-	2.98E-06
Vinyl Chloride	1.00E+00	8.38E-03	3.40E-05	3.40E-08	2.39E-01	5.73E-01	7.10E-01	6.25E+01	2.55E-02	Eq. 3.3	-	3.37E-10	3.37E-10
<b>Parcel F</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	8.99E-02	8.99E-05	3.72E-01	8.94E-01	7.10E-01	9.69E+01	4.17E-02	Eq. 3.2	1.41E-06	-	1.41E-06
Tetrachloroethene	1.00E+00	3.34E-02	1.90E-01	1.90E-04	9.09E-01	2.18E+00	7.10E-01	1.66E+02	1.66E-01	Eq. 3.2	1.41E-05	-	1.41E-05
Trichloroethylene	1.00E+00	1.16E-02	1.89E-01	1.89E-04	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	3.90E-06	-	3.90E-06
Vinyl Chloride	1.00E+00	8.38E-03	1.80E-04	1.80E-07	2.39E-01	5.73E-01	7.10E-01	6.25E+01	2.55E-02	Eq. 3.3	-	1.78E-09	1.78E-09

**Notes:**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

A default value of 1.0 was used for cis-1,2-dichloroethene, which is not listed in Exhibit B-3.

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Refer to Table 8 for groundwater concentration.

<sup>4</sup> Refer to Table C-2.

<sup>5</sup> Refer to Table C-3.

<sup>6</sup> Refer to Table C-1.

<sup>7</sup> Value estimated using Equation A-1 (USEPA 2004).

<sup>8</sup> Estimated using Equation 3-2 when  $t_{event} \leq t^*$  (USEPA 2004).

<sup>9</sup> Estimated Using Equation 3-3 when  $t_{event} > t^*$  (USEPA 2004).

<sup>10</sup> DA<sub>event</sub> from either Equation 3-2 or 3-3 depending on  $t_{event}$  (USEPA 2004).

**Table C-5**  
**Estimation of DA<sub>event</sub> for Dermal Contact with Organics in Groundwater (Construction Worker)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

*For organics,*

$$\text{If } t_{\text{event}} \leq t^*, \text{ then: } DA_{\text{event}} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{\text{event}} \times t_{\text{event}}}{\pi}}$$

$$\text{If } t_{\text{event}} > t^*, \text{ then: } DA_{\text{event}} = FA \times K_p \times C_w \left[ \frac{t_{\text{event}}}{1+B} + 2\tau_{\text{event}} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$$

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Concentration in Water <sup>3</sup> (mg/L)	Concentration in Water (mg/cm <sup>3</sup> )	Lag Time per Event <sup>4</sup> (hr/event)	Time to reach steady state <sup>5</sup> (hr)	Event Duration <sup>6</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>7</sup> (unitless)	Formula Used <sup>8,9</sup>	Absorbed Dose per Event <sup>8</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>9</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>10</sup> (mg/cm <sup>3</sup> -event)
Chemical	FA	Kp	Cw (mg/L)	Cw (mg/cm <sup>3</sup> )	τ <sub>event</sub>	t*	t <sub>event</sub>	MW	B	Formula	DA <sub>event</sub> (Eq. 3.2)	DA <sub>event</sub> (Eq. 3.3)	Final DA <sub>event</sub> Const Wkr
<b>Groundwater</b>													
<b>Parcel A</b>													
Tetrachloroethene	1.00E+00	3.34E-02	1.22E+01	1.22E-02	9.09E-01	2.18E+00	4.00E+00	1.66E+02	1.66E-01	Eq. 3.3	-	2.27E-03	2.27E-03
Trichloroethylene	1.00E+00	1.16E-02	1.79E-02	1.79E-05	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	1.04E-06	1.04E-06
<b>Parcel B</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.00E-02	1.00E-05	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	5.83E-07	5.83E-07
<b>Parcel C</b>													
Trichloroethylene	1.00E+00	1.16E-02	4.43E-03	4.43E-06	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	2.58E-07	2.58E-07
<b>Parcel D</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.98E-02	1.98E-05	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	1.15E-06	1.15E-06
<b>Parcel E</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	4.37E-03	4.37E-06	3.72E-01	8.94E-01	4.00E+00	9.69E+01	4.17E-02	Eq. 3.3	-	2.22E-07	2.22E-07
Trichloroethylene	1.00E+00	1.16E-02	1.45E-01	1.45E-04	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	8.44E-06	8.44E-06
Vinyl Chloride	1.00E+00	8.38E-03	3.40E-05	3.40E-08	2.39E-01	5.73E-01	4.00E+00	6.25E+01	2.55E-02	Eq. 3.3	-	1.25E-09	1.25E-09
<b>Parcel F</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	8.99E-02	8.99E-05	3.72E-01	8.94E-01	4.00E+00	9.69E+01	4.17E-02	Eq. 3.3	-	4.57E-06	4.57E-06
Tetrachloroethene	1.00E+00	3.34E-02	1.90E-01	1.90E-04	9.09E-01	2.18E+00	4.00E+00	1.66E+02	1.66E-01	Eq. 3.3	-	3.52E-05	3.52E-05
Trichloroethylene	1.00E+00	1.16E-02	1.89E-01	1.89E-04	5.81E-01	1.39E+00	4.00E+00	1.31E+02	5.11E-02	Eq. 3.3	-	1.10E-05	1.10E-05
Vinyl Chloride	1.00E+00	8.38E-03	1.80E-04	1.80E-07	2.39E-01	5.73E-01	4.00E+00	6.25E+01	2.55E-02	Eq. 3.3	-	6.62E-09	6.62E-09

**Notes:**

- <sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).  
A default value of 1.0 was used for cis-1,2-dichloroethene, which is not listed in Exhibit B-3.
- <sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).
- <sup>3</sup> Refer to Table 8 for groundwater concentration.
- <sup>4</sup> Refer to Table C-2.
- <sup>5</sup> Refer to Table C-3.
- <sup>6</sup> Refer to Table C-1.
- <sup>7</sup> Value estimated using Equation A-1 (USEPA 2004).
- <sup>8</sup> Estimated using Equation 3-2 when t<sub>event</sub> ≤ t\* (USEPA 2004).
- <sup>9</sup> Estimated Using Equation 3-3 when t<sub>event</sub> > t\* (USEPA 2004).
- <sup>10</sup> DA<sub>event</sub> from either Equation 3-2 or 3-3 depending on t<sub>event</sub> (USEPA 2004).

**Table C-6**  
**Estimation of DA<sub>event</sub> for Dermal Contact with Organics in Groundwater (Industrial Worker)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

*For organics,*

$$\text{If } t_{\text{event}} \leq t^*, \text{ then: } DA_{\text{event}} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{\text{event}} \times t_{\text{event}}}{\pi}}$$

$$\text{If } t_{\text{event}} > t^*, \text{ then: } DA_{\text{event}} = FA \times K_p \times C_w \left[ \frac{t_{\text{event}}}{1+B} + 2\tau_{\text{event}} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$$

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Concentration in Water <sup>3</sup> (mg/L)	Concentration in Water (mg/cm <sup>3</sup> )	Lag Time per Event <sup>4</sup> (hr/event)	Time to reach steady state <sup>5</sup> (hr)	Event Duration <sup>6</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>7</sup> (unitless)	Formula Used <sup>8,9</sup>	Absorbed Dose per Event <sup>8</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>9</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>10</sup> (mg/cm <sup>3</sup> -event)
Chemical	FA	Kp	Cw (mg/L)	Cw (mg/cm <sup>3</sup> )	τ <sub>event</sub>	t*	t <sub>event</sub>	MW	B	Formula	DA <sub>event</sub> (Eq. 3.2)	DA <sub>event</sub> (Eq. 3.3)	Final DA <sub>event</sub> Ind Wkr
<b>Groundwater</b>													
<b>Parcel A</b>													
Tetrachloroethene	1.00E+00	3.34E-02	1.22E+01	1.22E-02	9.09E-01	2.18E+00	7.10E-01	1.66E+02	1.66E-01	Eq. 3.2	9.07E-04	-	9.07E-04
Trichloroethylene	1.00E+00	1.16E-02	1.79E-02	1.79E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	3.68E-07	-	3.68E-07
<b>Parcel B</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.00E-02	1.00E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	2.06E-07	-	2.06E-07
<b>Parcel C</b>													
Trichloroethylene	1.00E+00	1.16E-02	4.43E-03	4.43E-06	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	9.12E-08	-	9.12E-08
<b>Parcel D</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.98E-02	1.98E-05	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	4.07E-07	-	4.07E-07
<b>Parcel E</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	4.37E-03	4.37E-06	3.72E-01	8.94E-01	7.10E-01	9.69E+01	4.17E-02	Eq. 3.2	6.83E-08	-	6.83E-08
Trichloroethylene	1.00E+00	1.16E-02	1.45E-01	1.45E-04	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	2.98E-06	-	2.98E-06
Vinyl Chloride	1.00E+00	8.38E-03	3.40E-05	3.40E-08	2.39E-01	5.73E-01	7.10E-01	6.25E+01	2.55E-02	Eq. 3.3	-	3.37E-10	3.37E-10
<b>Parcel F</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	8.99E-02	8.99E-05	3.72E-01	8.94E-01	7.10E-01	9.69E+01	4.17E-02	Eq. 3.2	1.41E-06	-	1.41E-06
Tetrachloroethene	1.00E+00	3.34E-02	1.90E-01	1.90E-04	9.09E-01	2.18E+00	7.10E-01	1.66E+02	1.66E-01	Eq. 3.2	1.41E-05	-	1.41E-05
Trichloroethylene	1.00E+00	1.16E-02	1.89E-01	1.89E-04	5.81E-01	1.39E+00	7.10E-01	1.31E+02	5.11E-02	Eq. 3.2	3.90E-06	-	3.90E-06
Vinyl Chloride	1.00E+00	8.38E-03	1.80E-04	1.80E-07	2.39E-01	5.73E-01	7.10E-01	6.25E+01	2.55E-02	Eq. 3.3	-	1.78E-09	1.78E-09

**Notes:**

- <sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).  
A default value of 1.0 was used for cis-1,2-dichloroethene, which is not listed in Exhibit B-3.
- <sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).
- <sup>3</sup> Refer to Table 8 for groundwater concentration.
- <sup>4</sup> Refer to Table C-2.
- <sup>5</sup> Refer to Table C-3.
- <sup>6</sup> Refer to Table C-1.
- <sup>7</sup> Value estimated using Equation A-1 (USEPA 2004).
- <sup>8</sup> Estimated using Equation 3-2 when t<sub>event</sub> ≤ t\* (USEPA 2004).
- <sup>9</sup> Estimated Using Equation 3-3 when t<sub>event</sub> > t\* (USEPA 2004).
- <sup>10</sup> DA<sub>event</sub> from either Equation 3-2 or 3-3 depending on t<sub>event</sub> (USEPA 2004).

**Table C-7**  
**Estimation of DA<sub>event</sub> for Dermal Contact with Organics in Groundwater (Resident Child)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

*For organics,*

$$\text{If } t_{\text{event}} \leq t^*, \text{ then: } DA_{\text{event}} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{\text{event}} \times t_{\text{event}}}{\pi}}$$

$$\text{If } t_{\text{event}} > t^*, \text{ then: } DA_{\text{event}} = FA \times K_p \times C_w \left[ \frac{t_{\text{event}}}{1+B} + 2\tau_{\text{event}} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$$

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Concentration in Water <sup>3</sup> (mg/L)	Concentration in Water (mg/cm <sup>3</sup> )	Lag Time per Event <sup>4</sup> (hr/event)	Time to reach steady state <sup>5</sup> (hr)	Event Duration <sup>6</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>7</sup> (unitless)	Formula Used <sup>8,9</sup>	Absorbed Dose per Event <sup>8</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>9</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>10</sup> (mg/cm <sup>3</sup> -event)
Chemical	FA	Kp	Cw (mg/L)	Cw (mg/cm <sup>3</sup> )	τ <sub>event</sub>	t*	t <sub>event</sub>	MW	B	Formula	DA <sub>event</sub> (Eq. 3.2)	DA <sub>event</sub> (Eq. 3.3)	Final DA <sub>event</sub> Child
<b>Groundwater</b>													
<b>Parcel A</b>													
Tetrachloroethene	1.00E+00	3.34E-02	1.22E+01	1.22E-02	9.09E-01	2.18E+00	5.40E-01	1.66E+02	1.66E-01	Eq. 3.2	7.91E-04	-	7.91E-04
Trichloroethylene	1.00E+00	1.16E-02	1.79E-02	1.79E-05	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	3.21E-07	-	3.21E-07
<b>Parcel B</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.00E-02	1.00E-05	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	1.80E-07	-	1.80E-07
<b>Parcel C</b>													
Trichloroethylene	1.00E+00	1.16E-02	4.43E-03	4.43E-06	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	7.96E-08	-	7.96E-08
<b>Parcel D</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.98E-02	1.98E-05	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	3.55E-07	-	3.55E-07
<b>Parcel E</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	4.37E-03	4.37E-06	3.72E-01	8.94E-01	5.40E-01	9.69E+01	4.17E-02	Eq. 3.2	5.96E-08	-	5.96E-08
Trichloroethylene	1.00E+00	1.16E-02	1.45E-01	1.45E-04	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	2.60E-06	-	2.60E-06
Vinyl Chloride	1.00E+00	8.38E-03	3.40E-05	3.40E-08	2.39E-01	5.73E-01	5.40E-01	6.25E+01	2.55E-02	Eq. 3.2	2.83E-10	-	2.83E-10
<b>Parcel F</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	8.99E-02	8.99E-05	3.72E-01	8.94E-01	5.40E-01	9.69E+01	4.17E-02	Eq. 3.2	1.23E-06	-	1.23E-06
Tetrachloroethene	1.00E+00	3.34E-02	1.90E-01	1.90E-04	9.09E-01	2.18E+00	5.40E-01	1.66E+02	1.66E-01	Eq. 3.2	1.23E-05	-	1.23E-05
Trichloroethylene	1.00E+00	1.16E-02	1.89E-01	1.89E-04	5.81E-01	1.39E+00	5.40E-01	1.31E+02	5.11E-02	Eq. 3.2	3.40E-06	-	3.40E-06
Vinyl Chloride	1.00E+00	8.38E-03	1.80E-04	1.80E-07	2.39E-01	5.73E-01	5.40E-01	6.25E+01	2.55E-02	Eq. 3.2	1.50E-09	-	1.50E-09

**Notes:**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

A default value of 1.0 was used for cis-1,2-dichloroethene, which is not listed in Exhibit B-3.

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Refer to Table 8 for groundwater concentration.

<sup>4</sup> Refer to Table C-2.

<sup>5</sup> Refer to Table C-3.

<sup>6</sup> Refer to Table C-1.

<sup>7</sup> Value estimated using Equation A-1 (USEPA 2004).

<sup>8</sup> Estimated using Equation 3-2 when  $t_{\text{event}} \leq t^*$  (USEPA 2004).

<sup>9</sup> Estimated Using Equation 3-3 when  $t_{\text{event}} > t^*$  (USEPA 2004).

<sup>10</sup> DA<sub>event</sub> from either Equation 3-2 or 3-3 depending on  $t_{\text{event}}$  (USEPA 2004).

**Table C-8**  
**Estimation of DA<sub>event</sub> for Dermal Contact with Organics in Groundwater (Age-Adjusted Resident Adult)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

*For organics,*

$$\text{If } t_{\text{event}} \leq t^*, \text{ then: } DA_{\text{event}} = 2FA \times K_p \times C_w \sqrt{\frac{6\tau_{\text{event}} \times t_{\text{event}}}{\pi}}$$

$$\text{If } t_{\text{event}} > t^*, \text{ then: } DA_{\text{event}} = FA \times K_p \times C_w \left[ \frac{t_{\text{event}}}{1+B} + 2\tau_{\text{event}} \left( \frac{1+3B+3B^2}{(1+B)^2} \right) \right]$$

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Concentration in Water <sup>3</sup> (mg/L)	Concentration in Water (mg/cm <sup>3</sup> )	Lag Time per Event <sup>4</sup> (hr/event)	Time to reach steady state <sup>5</sup> (hr)	Event Duration <sup>6</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>7</sup> (unitless)	Formula Used <sup>8,9</sup>	Absorbed Dose per Event <sup>8</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>9</sup> (mg/cm <sup>3</sup> -event)	Absorbed Dose per Event <sup>10</sup> (mg/cm <sup>3</sup> -event)
Chemical	FA	Kp	Cw (mg/L)	Cw (mg/cm <sup>3</sup> )	τ <sub>event</sub>	t*	t <sub>event</sub>	MW	B	Formula	DA <sub>event</sub> (Eq. 3.2)	DA <sub>event</sub> (Eq. 3.3)	Final DA <sub>event</sub> Adult
<b>Groundwater</b>													
<b>Parcel A</b>													
Tetrachloroethene	1.00E+00	3.34E-02	1.22E+01	1.22E-02	9.09E-01	2.18E+00	6.70E-01	1.66E+02	1.66E-01	Eq. 3.2	8.81E-04	-	8.81E-04
Trichloroethylene	1.00E+00	1.16E-02	1.79E-02	1.79E-05	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	3.57E-07	-	3.57E-07
<b>Parcel B</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.00E-02	1.00E-05	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	2.00E-07	-	2.00E-07
<b>Parcel C</b>													
Trichloroethylene	1.00E+00	1.16E-02	4.43E-03	4.43E-06	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	8.86E-08	-	8.86E-08
<b>Parcel D</b>													
Trichloroethylene	1.00E+00	1.16E-02	1.98E-02	1.98E-05	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	3.95E-07	-	3.95E-07
<b>Parcel E</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	4.37E-03	4.37E-06	3.72E-01	8.94E-01	6.70E-01	9.69E+01	4.17E-02	Eq. 3.2	6.64E-08	-	6.64E-08
Trichloroethylene	1.00E+00	1.16E-02	1.45E-01	1.45E-04	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	2.90E-06	-	2.90E-06
Vinyl Chloride	1.00E+00	8.38E-03	3.40E-05	3.40E-08	2.39E-01	5.73E-01	6.70E-01	6.25E+01	2.55E-02	Eq. 3.3	-	3.26E-10	3.26E-10
<b>Parcel F</b>													
cis-1,2-Dichloroethene	1.00E+00	1.10E-02	8.99E-02	8.99E-05	3.72E-01	8.94E-01	6.70E-01	9.69E+01	4.17E-02	Eq. 3.2	1.37E-06	-	1.37E-06
Tetrachloroethene	1.00E+00	3.34E-02	1.90E-01	1.90E-04	9.09E-01	2.18E+00	6.70E-01	1.66E+02	1.66E-01	Eq. 3.2	1.37E-05	-	1.37E-05
Trichloroethylene	1.00E+00	1.16E-02	1.89E-01	1.89E-04	5.81E-01	1.39E+00	6.70E-01	1.31E+02	5.11E-02	Eq. 3.2	3.79E-06	-	3.79E-06
Vinyl Chloride	1.00E+00	8.38E-03	1.80E-04	1.80E-07	2.39E-01	5.73E-01	6.70E-01	6.25E+01	2.55E-02	Eq. 3.3	-	1.72E-09	1.72E-09

**Notes:**

- <sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).  
A default value of 1.0 was used for cis-1,2-dichloroethene, which is not listed in Exhibit B-3.
- <sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).
- <sup>3</sup> Refer to Table 8 for groundwater concentration.
- <sup>4</sup> Refer to Table C-2.
- <sup>5</sup> Refer to Table C-3.
- <sup>6</sup> Refer to Table C-1.
- <sup>7</sup> Value estimated using Equation A-1 (USEPA 2004).
- <sup>8</sup> Estimated using Equation 3-2 when t<sub>event</sub> ≤ t\* (USEPA 2004).
- <sup>9</sup> Estimated Using Equation 3-3 when t<sub>event</sub> > t\* (USEPA 2004).
- <sup>10</sup> DA<sub>event</sub> from either Equation 3-2 or 3-3 depending on t<sub>event</sub> (USEPA 2004).

**Table C-9**  
**Groundwater Vapors in a Trench**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

For Mass-Transfer Coefficients			For Emission Flux and Concentration in Trench			Trench Dimensions		
Kg,H2O	0.833	cm/s	CF1	1.00E-03	L/cm3	Length	<b>8</b>	ft
MWH2O	18		CF2	1.00E+04	cm2/m2		2.44	m
Kl,O2	0.002	cm/s	CF3	3600	s/hr	Width	<b>3</b>	ft
MWO2	32		F	<b>1</b>			0.91	m
T	<b>77</b>	F	ACH	2	hr-1	Depth	<b>8</b>	ft
T	298	K					2.44	m
R	8.20E-05	atm-m3/mol-K				Width/Depth	0.38	

Width = 3

**Table C-9  
Groundwater Vapors in a Trench  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Exposure-point concentrations (inhalation) for construction/utility workers in a trench: Groundwater less than 15 feet deep	Molecular Weight <sup>1</sup> MWi g/mol	Henry's Law Constant <sup>1</sup> Hi atm-m3/mol	Gas-Phase Mass Transfer Coefficient KiG cm/s	Liquid-Phase Mass Transfer Coefficient KiL cm/s	Overall Mass Transfer Coefficient Ki cm/s	Concentration of Contaminant in Groundwater Cgw ug/L	Volatilization Factor VF L/m3	Concentration of Contaminant in Trench Ctrench ug/m3	Concentration of Contaminant in Trench Ctrench mg/m3
<b>VOCs</b>									
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	1.38E+04	6.47E+00	8.89E+04	8.89E+01
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	1.98E+01	7.24E+00	1.44E+02	1.44E-01

**Notes:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).



**APPENDIX D**  
**CHEMICALS OF SPECIFIC CONSIDERATION**

**Table D-1**  
**Calculation of Risks to Future Residents from Ingestion of Groundwater for Trichloroethylene**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Ingestion

Age	ED <sup>1,2</sup> (years)	EF <sup>2</sup> (days/yr)	IRGW <sup>3,4</sup> (L/day)	BW <sup>3,4</sup> (kg)	AT-C (days) (70 years x 365 days/year)	Age-Dependent <sup>4</sup> Adjustment Factors
0 to 2 years	2	350	0.73	10	25550	10
2 to 6 years	4	350	0.76	17	25550	3
6 to 16 years	10	350	1.3	44	25550	3
16 to 26 years	10	350	2.2	80	25550	1
0 to 6 years (Child)	6	350	0.78	15	25550	NA
6 to 26 years (Adult)	20	350	2.5	80	25550	NA

$DI = (CGW \times [(CAF \times IFW_{res-adj}) + (MAF \times IFWM_{res-adj})] / AT-C)$   
 Where:  
 $IFW_{res-adj} = ED_c \times EF_c \times IRGW_c \times 1/BW_c + ED_a \times EF_a \times IRGW_a \times 1/BW_a$   
 $IFWM_{res-adj} = (ED_{0-2} \times EF_{0-2} \times IRGW_{0-2} \times 1/BW_{0-2} \times 10) + (ED_{2-6} \times EF_{2-6} \times IRGW_{2-6} \times 1/BW_{2-6} \times 3) + (ED_{6-16} \times EF_{6-16} \times IRGW_{6-16} \times 1/BW_{6-16} \times 3) + (ED_{16-26} \times EF_{16-26} \times IRGW_{16-26} \times 1/BW_{16-26} \times 1)$   
 $CAF = SF_{Non-Hodgkins\ and\ Liver} / SF_{Adult} = 3.72E-2\ (mg/kg-day)^{-1} / 4.6E-2\ (mg/kg-day)^{-1} = 0.804$   
 $MAF = SF_{Kidney} / SF_{Adult} = 9.3E-3\ (mg/kg-day)^{-1} / 4.6E-2\ (mg/kg-day)^{-1} = 0.202$   
 $Risk = DI \times SF$

Chemical	CGW (mg/L)	IFWres-adj (L/kg)	IFWMres-adj (L/kg)	DI (0 to 26 years) (mg/kg-day)	SF (mg/kg-day) <sup>-1</sup>	Risk (0 to 26 years)	Total Risk
<b>Parcel A</b> Trichloroethylene	1.79E-02	3.28E+02	1.11E+03	3.41E-04	4.60E-02	1.57E-05	1.57E-05
<b>Parcel B</b> Trichloroethylene	1.00E-02	3.28E+02	1.11E+03	1.91E-04	4.60E-02	8.77E-06	8.77E-06
<b>Parcel C</b> Trichloroethylene	4.43E-03	3.28E+02	1.11E+03	8.44E-05	4.60E-02	3.88E-06	3.88E-06
<b>Parcel D</b> Trichloroethylene	1.98E-02	3.28E+02	1.11E+03	3.77E-04	4.60E-02	1.73E-05	1.73E-05
<b>Parcel E</b> Trichloroethylene	1.45E-01	3.28E+02	1.11E+03	2.76E-03	4.60E-02	1.27E-04	1.27E-04
<b>Parcel F</b> Trichloroethylene	1.89E-01	3.28E+02	1.11E+03	3.61E-03	4.60E-02	1.66E-04	1.66E-04
<b>Parcel H</b> Trichloroethylene	1.98E-02	3.28E+02	1.11E+03	3.77E-04	4.60E-02	1.73E-05	1.73E-05

**Table D-1**  
**Calculation of Risks to Future Residents from Ingestion of Groundwater for Trichloroethylene**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Ingestion

**Where:**

AT-C (days) = (70 [lifetime in years] x 365 days/year)

BW (kg) = Body Weight

CAF (unitless) = Carcinogenic Adjusted Factor

CGW (mg/L) = Concentration in groundwater

DI (mg/kg-day) = Daily Intake

ED (years) = Exposure Duration

EF (days/year) = Exposure Frequency

IFWres-adj (L/kg) = Resident Drinking Water Ingestion Rate (Age-Adjusted)

IFWMres-adj (L/kg) = Resident Mutagenic Drinking Water Ingestion Rate (Age-Adjusted)

IRGW (L/day) = Ingestion Rate, groundwater

MAF (unitless) = Mutagenic Adjusted Factor

SF (mg/kg-day)<sup>-1</sup> = Oral Slope Factor

**Sources:**

<sup>1</sup> USEPA, 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. March 2005.

<sup>2</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.

<sup>3</sup> USEPA, 2011. Exposure Factors Handbook: 2011 Edition. EPA/ 600/ R 090/052F. September 2011.

<sup>4</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.

**Table D-2**  
**Calculation of Risks to Future Residents from Dermal Contact with Groundwater for Trichloroethylene**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Dermal Contact

Age	EV <sup>1</sup> (events/day)	EF <sup>2</sup> (days/yr)	ED <sup>2,3</sup> (years)	SA <sup>4</sup> (cm <sup>2</sup> )	BW <sup>4,5</sup> (kg)	AT-C (days) (70 years x 365 days/year)	Age-Dependent <sup>5</sup> Adjustment Factors
0 to 2 years	1	350	2	4646	10	25550	10
2 to 6 years	1	350	4	7225	17	25550	3
6 to 16 years	1	350	10	13350	44	25550	3
16 to 26 years	1	350	10	19450	80	25550	1
0 to 6 years (Child)	1	350	6	6378	15	25550	NA
6 to 26 years (Adult)	1	350	20	20900	80	25550	NA

$$DAD = ( [ (CAF \times DFWres-adj) + (MAF \times DFWMres-adj) ] / AT-C )$$

Where:

$$DFWres-adj = DA-Event_c \times EV_c \times ED_c \times EF_c \times SA_c \times 1/BW_c + DA-Event_a \times EV_a \times ED_a \times EF_a \times SA_a \times 1/BW_a$$

$$DFWMres-adj = ( DA-Event_{0-2} \times EV_{0-2} \times ED_{0-2} \times EF_{0-2} \times SA_{0-2} \times 1/BW_{0-2} \times 10 ) + ( DA-Event_{2-6} \times EV_{2-6} \times ED_{2-6} \times EF_{2-6} \times SA_{2-6} \times 1/BW_{2-6} \times 3 ) + ( DA-Event_{6-16} \times EV_{6-16} \times ED_{6-16} \times EF_{6-16} \times SA_{6-16} \times 1/BW_{6-16} \times 3 ) + ( DA-Event_{16-26} \times EV_{16-26} \times ED_{16-26} \times EF_{16-26} \times SA_{16-26} \times 1/BW_{16-26} \times 1 )$$

$$CAF = SF_{Non-Hodgkins \text{ and } Liver} / SF_{Adult} = 3.72E-2 \text{ (mg/kg-day)}^{-1} / 4.6E-2 \text{ (mg/kg-day)}^{-1} = 0.804$$

$$MAF = SF_{Kidney} / SF_{Adult} = 9.3E-3 \text{ (mg/kg-day)}^{-1} / 4.6E-2 \text{ (mg/kg-day)}^{-1} = 0.202$$

Risk = DAD x SF

Chemical	CGW (mg/L)	DA-Event <sup>6</sup> (0 to 2 years) (2 to 6 years) (mg/cm <sup>2</sup> -event)	DA-Event <sup>6</sup> (6 to 16 years) (16 to 26 years) (mg/cm <sup>2</sup> -event)	DA-Event <sup>6</sup> (0 to 6 years) (mg/cm <sup>2</sup> -event)	DA-Event <sup>6</sup> (6 to 26 years) (mg/cm <sup>2</sup> -event)	DFWres-adj (L/kg)	DFWMres-adj (L/kg)	DAD (mg/kg-day)	SF (mg/kg-day) <sup>-1</sup>	Risk (0 to 26 years)	Total Risk
<b>Parcel A</b> Trichloroethylene	1.79E-02	3.21E-07	3.57E-07	3.21E-07	3.57E-07	9.40E-01	3.06E+00	5.38E-05	4.60E-02	2.47E-06	2.47E-06
<b>Parcel B</b> Trichloroethylene	1.00E-02	1.80E-07	2.06E-07	1.80E-07	2.06E-07	5.37E-01	1.74E+00	3.06E-05	4.60E-02	1.41E-06	1.41E-06
<b>Parcel C</b> Trichloroethylene	4.43E-03	7.96E-08	9.12E-08	7.96E-08	9.12E-08	2.38E-01	7.69E-01	1.36E-05	4.60E-02	6.24E-07	6.24E-07
<b>Parcel D</b> Trichloroethylene	1.98E-02	3.55E-07	4.07E-07	3.55E-07	4.07E-07	1.06E+00	3.43E+00	6.05E-05	4.60E-02	2.78E-06	2.78E-06
<b>Parcel E</b> Trichloroethylene	1.45E-01	2.60E-06	2.98E-06	2.60E-06	2.98E-06	7.78E+00	2.51E+01	4.43E-04	4.60E-02	2.04E-05	2.04E-05
<b>Parcel F</b> Trichloroethylene	1.89E-01	3.40E-06	3.90E-06	3.40E-06	3.90E-06	1.02E+01	3.29E+01	5.80E-04	4.60E-02	2.67E-05	2.67E-05
<b>Parcel H</b> Trichloroethylene	1.98E-02	3.55E-07	4.07E-07	3.55E-07	4.07E-07	1.06E+00	3.43E+00	6.05E-05	4.60E-02	2.78E-06	2.78E-06

**Table D-2**  
**Calculation of Risks to Future Residents from Dermal Contact with Groundwater for Trichloroethylene**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Dermal Contact

**Where:**

AT-C (days) = (70 [lifetime in years] x 365 days/year)	DFWMres-adj (mg/kg) = Resident Mutagenic Water Dermal Contact Rate (Age-Adjusted)
BW (kg) = Body Weight	ED (years) = Exposure Duration
CAF (unitless) = Carcinogenic Adjusted Factor	EF (days/year) = Exposure Frequency
CGW (mg/L) = Concentration in groundwater	EV (events/day) = Event Frequency
DAD (mg/kg-day) = Dermal Absorbed Dose	MAF (unitless) = Mutagenic Adjusted Factor
DA-Event (mg/cm <sup>2</sup> -event) = Absorbed dose per event	SA (cm <sup>2</sup> ) = Skin Surface Area available for contact
DFWres-adj (L/kg) = Resident Water Dermal Contact Rate (Age-Adjusted)	SF (mg/kg-day) <sup>-1</sup> = Dermal Slope Factor

**Sources:**

- <sup>1</sup> USEPA, 2004. Risk Assessment Guidance for Superfund Volume 1: Human Health Evaluation Manual (Part E, Supplemental Guidance for Dermal Risk Assessment), Final, July 2004.
- <sup>2</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.
- <sup>3</sup> USEPA, 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. March 2005.
- <sup>4</sup> USEPA, 2011. Exposure Factors Handbook: 2011 Edition. EPA/ 600/ R 090/052F. September 2011.
- <sup>5</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.
- <sup>6</sup> DA-Event calculations are shown in Appendix C.

**Table D-3**  
**Calculation of Risks to Future Residents from Inhalation of Trichloroethylene while Showering with Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Showering

Age	ET <sup>1</sup> (hours/day)	EF <sup>1</sup> (days/yr)	ED <sup>1,2</sup> (years)	AT-C (hours) (70 years x 365 days/year x 24 hours/day)	Age-Dependent <sup>3</sup> Adjustment Factors
0 to 2 years	24	350	2	613200	10
2 to 6 years	24	350	4	613200	3
6 to 16 years	24	350	10	613200	3
16 to 26 years	24	350	10	613200	1
26 years	24	350	26	613200	NA

$$EC = CA \times [ (ET_{res} \times EF_{res} \times ED_{res} \times CAF_{res}) + (ET_{0-2} \times EF_{0-2} \times ED_{0-2} \times MAF \times 10) + (ET_{2-6} \times EF_{2-6} \times ED_{2-6} \times MAF \times 3) + (ET_{6-16} \times EF_{6-16} \times ED_{6-16} \times MAF \times 3) + (ET_{16-26} \times EF_{16-26} \times ED_{16-26} \times MAF \times 1) ] / AT-C$$

Where:

$CAF = IUR_{Non-Hodgkins\ and\ Liver} / IUR_{Adult} = 3.1E-6\ (ug/m^3)^{-1} / 4.1E-6\ (ug/m^3)^{-1} = 0.756$   
 $MAF = IUR_{Kidney} / IUR_{Adult} = 1E-6\ (ug/m^3)^{-1} / 4.1E-6\ (ug/m^3)^{-1} = 0.244$

Risk (0 to 26 years) = EC x IUR

Risk (0 to 26 years) = EC x IUR	CA (ug/m3)	EC (0 to 26 years) (ug/m3)	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	Risk (0 to 26 years)	Total Risk
<b>Parcel A</b>					
Trichloroethylene	8.94E+00	4.56E+00	4.10E-06	1.87E-05	1.87E-05
<b>Parcel B</b>					
Trichloroethylene	5.00E+00	2.55E+00	4.10E-06	1.05E-05	1.05E-05
<b>Parcel C</b>					
Trichloroethylene	2.22E+00	1.13E+00	4.10E-06	4.63E-06	4.63E-06
<b>Parcel D</b>					
Trichloroethylene	9.88E+00	5.04E+00	4.10E-06	2.07E-05	2.07E-05
<b>Parcel E</b>					
Trichloroethylene	7.24E+01	3.69E+01	4.10E-06	1.51E-04	1.51E-04
<b>Parcel F</b>					
Trichloroethylene	9.47E+01	4.83E+01	4.10E-06	1.98E-04	1.98E-04
<b>Parcel H</b>					
Trichloroethylene	9.88E+00	5.04E+00	4.10E-06	2.07E-05	2.07E-05

**Table D-3**  
**Calculation of Risks to Future Residents from Inhalation of Trichloroethylene while Showering with Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Showering

**Where:**

AT-C (hours) = (70 [lifetime in years] x 365 days/year x 24 hours/day)  
CA (ug/m3) = Contaminant concentration in air (calculated using USEPA Andelman Model):  
(CW mg/L x 0.5 L/m3 x 1000 ug/mg)  
CAF (unitless) = Carcinogenic Adjusted Factor  
EC (ug/m3) = Exposure concentration for estimating cancer risk

ED (years) = Exposure Duration  
EF (days/year) = Exposure Frequency  
ET (hours/day) = Exposure Time  
IUR (ug/m3)<sup>-1</sup> = Inhalation Unit Risk  
MAF (unitless) = Mutagenic Adjusted Factor

**Sources:**

- <sup>1</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.
- <sup>2</sup> USEPA, 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. March 2005.
- <sup>3</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.

**Table D-4  
Calculation of Risks to Future Residents from Inhalation of VOCs via Vapor Intrusion for Trichloroethylene  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Indoor Air

Age	ET <sup>1</sup> (hours/day)	EF <sup>1</sup> (days/yr)	ED <sup>1,2</sup> (years)	AT-C (hours) (70 years x 365 days/year x 24 hours/day)	Age-Dependent <sup>3</sup> Adjustment Factors
0 to 2 years	24	350	2	613200	10
2 to 6 years	24	350	4	613200	3
6 to 16 years	24	350	10	613200	3
16 to 26 years	24	350	10	613200	1
26 years	24	350	26	613200	NA

$$EC = CA \times [ (ET_{res} \times EF_{res} \times ED_{res} \times CAF_{res}) + (ET_{0-2} \times EF_{0-2} \times ED_{0-2} \times MAF \times 10) + (ET_{2-6} \times EF_{2-6} \times ED_{2-6} \times MAF \times 3) + (ET_{6-16} \times EF_{6-16} \times ED_{6-16} \times MAF \times 3) + (ET_{16-26} \times EF_{16-26} \times ED_{16-26} \times MAF \times 1) ] / AT-C$$

Where:

$$CAF = IUR_{Non-Hodgkins\ and\ Liver} / IUR_{Adult} = 3.1E-6\ (ug/m^3)^{-1} / 4.1E-6\ (ug/m^3)^{-1} = 0.756$$

$$MAF = IUR_{Kidney} / IUR_{Adult} = 1E-6\ (ug/m^3)^{-1} / 4.1E-6\ (ug/m^3)^{-1} = 0.244$$

Risk (0 to 26 years) = EC x IUR

Chemical	CA (ug/m3)	EC (0 to 26 years) (ug/m3)	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	Risk (0 to 26 years)	Total Risk
<b>Parcel A</b> Trichloroethene	1.34E+00	6.82E-01	4.10E-06	2.79E-06	2.79E-06
<b>Parcel B</b> Trichloroethene	6.74E-01	3.44E-01	4.10E-06	1.41E-06	1.41E-06
<b>Parcel C</b> Trichloroethene	2.98E-01	1.52E-01	4.10E-06	6.24E-07	6.24E-07
<b>Parcel D</b> Trichloroethene	6.08E-01	3.10E-01	4.10E-06	1.27E-06	1.27E-06
<b>Parcel E</b> Trichloroethene	1.61E+01	8.23E+00	4.10E-06	3.37E-05	3.37E-05
<b>Parcel F</b> Trichloroethene	1.77E+01	9.01E+00	4.10E-06	3.69E-05	3.69E-05
<b>Parcel H</b> Trichloroethene	6.08E-01	3.10E-01	4.10E-06	1.27E-06	1.27E-06



**Table D-4**  
**Calculation of Risks to Future Residents from Inhalation of VOCs via Vapor Intrusion for Trichloroethylene**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Indoor Air

**Where:**

AT-C (hours) = (70 [lifetime in years] x 365 days/year x 24 hours/day)  
 CA (ug/m3) = Contaminant concentration in air (calculated using Johnson and Ettinger Model)  
 CAF (unitless) = Carcinogenic Adjusted Factor  
 EC (ug/m3) = Exposure concentration for estimating cancer risk

ED (years) = Exposure Duration  
 EF (days/year) = Exposure Frequency  
 ET (hours/day) = Exposure Time  
 IUR (ug/m3)<sup>-1</sup> = Inhalation Unit Risk  
 MAF (unitless) = Mutagenic Adjusted Factor

**Sources:**

- <sup>1</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.
- <sup>2</sup> USEPA, 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. March 2005.
- <sup>3</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.

**Table D-5  
Calculation of Risks to Future Residents from Ingestion of Groundwater for Vinyl Chloride  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Ingestion

Age	IRGW <sup>1</sup> (L/day)	EF <sup>2</sup> (days/yr)	ED <sup>2</sup> (years)	BW <sup>1</sup> (kg)	AT-C (days) (70 years x 365 days/year)
Early Life	0.78	NA	NA	15	NA
0 to 6 years	0.78	350	6	15	25550
6 to 26 years	2.5	350	20	80	25550

$DI = (CGW \times IRGW_c \times 1/BW_c) + (CGW \times IRGW_c \times EF_c \times ED_c \times 1/BW_c \times 1/AT-C) + (CGW \times IRGW_a \times EF_a \times ED_a \times 1/BW_a \times 1/AT-C)$ <p>Risk (Early Life) = DI (Early Life) x SF<sub>EL</sub>                  Risk (0 to 6 years) = DI (0 to 6 years) x SF<sub>LL</sub>                  Risk (6 to 26 years) = DI (6 to 26 years) x SF<sub>LL</sub></p>										
Chemical	CGW (mg/L)	DI (Early Life) (mg/kg-day)	DI (0 to 6 years) (mg/kg-day)	DI (6 to 20 years) (mg/kg-day)	SF <sub>EL</sub> (Early Life Risk) (mg/kg-day) <sup>-1</sup>	SF <sub>LL</sub> (Later Life Risk) (mg/kg-day) <sup>-1</sup>	Risk (Early Life)	Risk (0 to 6 years)	Risk (6 to 26 years)	Total Risk
<i>Parcel E</i> Vinyl Chloride	3.40E-05	1.77E-06	1.45E-07	2.91E-07	7.80E-01	7.20E-01	1.38E-06	1.05E-07	2.10E-07	1.69E-06
<i>Parcel F</i> Vinyl Chloride	1.80E-04	9.36E-06	7.69E-07	1.54E-06	7.80E-01	7.20E-01	7.30E-06	5.54E-07	1.11E-06	8.96E-06

**Where:**

AT-C (days) = (70 [lifetime in years] x 365 days/year)  
 CGW (mg/L) = Concentration in groundwater  
 BWa (kg) = Body Weight - adult  
 BWc (kg) = Body Weight - child  
 DI (mg/kg-day) = Daily Intake

EDa (years) = Exposure Duration - adult  
 EDc (years) = Exposure Duration - child  
 EFa (days/year) = Exposure Frequency - adult  
 EFc (days/year) = Exposure Frequency - child

IRGWa (L/day) = Ingestion Rate, groundwater - adult  
 IRGWc (L/day) = Ingestion Rate, groundwater - child  
 NA = Not Applicable  
 SF<sub>EL</sub> (mg/kg-day)<sup>-1</sup> = Oral Slope Factor for Early Lifetime Exposure  
 SF<sub>LL</sub> (mg/kg-day)<sup>-1</sup> = Oral Slope Factor for Later Lifetime Exposure

SF<sub>EL</sub> = SF for Lifetime exposure from birth - SF for Lifetime exposure during adulthood  
 = 1.5 (mg/kg-day)<sup>-1</sup> - 0.72 (mg/kg-day)<sup>-1</sup> = 0.78 (mg/kg-day)<sup>-1</sup>

**Sources:**

<sup>1</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.  
<sup>2</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.

**Table D-6  
Calculation of Risks to Future Residents from Dermal Contact with Groundwater for Vinyl Chloride  
Alabama Army National Guard OMS #28  
Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Groundwater
Exposure Route:	Dermal Contact

Age	EV <sup>1</sup> (events/day)	EF <sup>2</sup> (days/yr)	ED <sup>2</sup> (years)	SA <sup>3</sup> (cm <sup>2</sup> )	BW <sup>3,4</sup> (kg)	AT-C (days) (70 years x 365 days/year)
Early Life	1	NA	NA	4646	10	NA
0 to 6 years	1	350	6	6378	15	25550
6 to 26 years	1	350	20	20900	80	25550

DAD (Early Life) = DA-Event x EVc x SAc x 1/BWc  
DAD (0 to 6 years) = DA-Event x EVc x EFc x EDc x SAc x 1/BWc x 1/AT-C  
DAD (6 to 26 years) = DA-Event x EVa x EFa x EDa x SAa x 1/BWa x 1/AT-C

Risk (Early Life) = DAD (Early Life) x SF<sub>EL</sub>  
Risk (0 to 6 years) = DAD (0 to 6 years) x SF<sub>LL</sub>  
Risk (6 to 26 years) = DAD (6 to 26 years) x SF<sub>LL</sub>

Chemical	CGW (mg/L)	DA-Event <sup>5</sup> (Early Life) (mg/cm <sup>2</sup> -event)	DA-Event <sup>5</sup> (0 to 6 years) (mg/cm <sup>2</sup> -event)	DA-Event <sup>5</sup> (6 to 26 years) (mg/cm <sup>2</sup> -event)	DAD (Early Life) (mg/kg-day)	DAD (0 to 6 years) (mg/kg-day)	DAD (6 to 20 years) (mg/kg-day)	SF <sub>EL</sub> (Early Life Risk) (mg/kg-day) <sup>-1</sup>	SF <sub>LL</sub> (Later Life Risk) (mg/kg-day) <sup>-1</sup>	Risk (Early Life)	Risk (0 to 6 years)	Risk (6 to 26 years)	Total Risk
<b>Parcel E</b> Vinyl Chloride	3.40E-05	1.50E-09	1.50E-09	1.78E-09	6.95E-07	5.23E-08	1.28E-07	7.80E-01	7.20E-01	5.42E-07	3.77E-08	9.19E-08	6.72E-07
<b>Parcel E</b> Vinyl Chloride	1.80E-04	1.50E-09	1.50E-09	1.78E-09	6.95E-07	5.23E-08	1.28E-07	7.80E-01	7.20E-01	5.42E-07	3.77E-08	9.19E-08	6.72E-07

**Where:**

- |  |  |  |
|--|--|--|
| AT-C (days) = (70 [lifetime in years] x 365 days/year)         | EDa (years) = Exposure Duration - adult      | NA = Not Applicable  |
| BWa (kg) = Body Weight - adult                                 | EDc (years) = Exposure Duration - child      | SAa (cm <sup>2</sup> ) = Skin Surface Area available for contact - adult                     |
| BWc (kg) = Body Weight - child                                 | EFa (days/year) = Exposure Frequency - adult | SAc (cm <sup>2</sup> ) = Skin Surface Area available for contact - child                     |
| CGW (mg/L) = Concentration in groundwater                      | EFc (days/year) = Exposure Frequency - child | SF <sub>EL</sub> (mg/kg-day) <sup>-1</sup> = Dermal Slope Factor for Early Lifetime Exposure |
| DAD (mg/kg-day) = Dermal Absorbed Dose                         | EVa (events/day) = Event Frequency - adult   | SF <sub>LL</sub> (mg/kg-day) <sup>-1</sup> = Dermal Slope Factor for Later Lifetime Exposure |
| DA-Event (mg/cm <sup>2</sup> -event) = Absorbed dose per event | EVc (events/day) = Event Frequency - child   |  |

SF<sub>EL</sub> = SF for Lifetime exposure from birth - SF for Lifetime exposure during adulthood  
= 1.5 (mg/kg-day)<sup>-1</sup> - 0.72 (mg/kg-day)<sup>-1</sup> = 0.78 (mg/kg-day)<sup>-1</sup>

**Sources:**

- <sup>1</sup> USEPA, 2004. Risk Assessment Guidance for Superfund Volume 1: Human Health Evaluation Manual (Part E, Supplemental Guidance for Dermal Risk Assessment), Final, July 2004.
- <sup>2</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.
- <sup>3</sup> USEPA, 2011. Exposure Factors Handbook: 2011 Edition. EPA/ 600/ R 090/052F. September 2011.
- <sup>4</sup> USEPA, 2018. Regional Screening Level User's Guide. November 2018.
- <sup>5</sup> DA-Event calculations are shown in Appendix C.

**Table D-7**  
**Calculation of Risks to Future Residents from Inhalation of Vinyl Chloride while Showering with Groundwater**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Showering

Age	ET <sup>1</sup> (hours/day)	EF <sup>1</sup> (days/yr)	ED <sup>1</sup> (years)	AT-C (hours) (70 years x 365 days/year x 24 hours/day)
Early Life	NA	NA	NA	NA
0 to 26 years	24	350	26	613200

EC (Early Life) = CA EC (0 to 26 years) = (CA x ET x EF x ED) / AT-C  Risk (Early Life) = EC (Early Life) x IUR <sub>EL</sub> Risk (0 to 26 years) = EC (0 to 26 years) x IUR <sub>LL</sub>								
Chemical	CA (ug/m3)	EC (Early Life) (ug/m3)	EC (0 to 26 years) (ug/m3)	IUR <sub>EL</sub> (Early Life Risk) (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR <sub>LL</sub> (Later Life Risk) (ug/m <sup>3</sup> ) <sup>-1</sup>	Risk (Early Life)	Risk (0 to 26 years)	Total Risk
<b>Parcel E</b>								
Vinyl Chloride	1.70E-02	1.70E-02	6.05E-03	4.40E-06	4.40E-06	7.48E-08	2.66E-08	1.01E-07
<b>Parcel F</b>								
Vinyl Chloride	9.00E-02	9.00E-02	3.21E-02	4.40E-06	4.40E-06	3.96E-07	1.41E-07	5.37E-07

**Where:**

AT-C (hours) = (70 [lifetime in years] x 365 days/year x 24 hours/day)  
 CA (ug/m3) = Contaminant concentration in air (calculated using USEPA Andelman Model):  
 (CW mg/L x 0.5 L/m3 x 1000 ug/mg)  
 EC (ug/m3) = Exposure concentration for estimating cancer risk

ED (years) = Exposure Duration  
 EF (days/year) = Exposure Frequency  
 IUR<sub>EL</sub> (ug/m3)<sup>-1</sup> = Inhalation Unit Risk for Early Lifetime Exposure  
 IUR<sub>LL</sub> (ug/m3)<sup>-1</sup> = Inhalation Unit Risk for Later Lifetime Exposure

IUR<sub>EL</sub> = IUR for Lifetime exposure from birth - IUR for Lifetime exposure during adulthood  
 = 8.8E-6 (ug/m<sup>3</sup>)<sup>-1</sup> - 4.4E-6 (ug/m<sup>3</sup>)<sup>-1</sup> = 4.4E-6 (ug/m<sup>3</sup>)<sup>-1</sup>

**Sources:**

<sup>1</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.

**Table D-8**  
**Calculation of Risks to Future Residents from Inhalation of Vinyl Chloride via Vapor Intrusion**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe:	Future
Receptor Population:	Resident
Receptor Age:	26-year Resident (Adult/Child)

Medium:	Groundwater
Exposure Medium:	Air
Exposure Route:	Inhalation - Indoor Air

Age	ET <sup>1</sup> (hours/day)	EF <sup>1</sup> (days/yr)	ED <sup>1</sup> (years)	AT-C (hours) (70 years x 365 days/year x 24 hours/day)
Early Life	NA	NA	NA	NA
0 to 26 years	24	350	26	613200

EC (Early Life) = CA EC (0 to 26 years) = (CA x ET x EF x ED) / AT-C  Risk (Early Life) = EC (Early Life) x IUR <sub>EL</sub> Risk (0 to 26 years) = EC (0 to 26 years) x IUR <sub>LL</sub>								
Chemical	CA (ug/m3)	EC (Early Life) (ug/m3)	EC (0 to 26 years) (ug/m3)	IUR <sub>EL</sub> (Early Life Risk) (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR <sub>LL</sub> (Later Life Risk) (ug/m <sup>3</sup> ) <sup>-1</sup>	Risk (Early Life)	Risk (Later Life)	Total Risk
<i>Parcel E</i> Vinyl Chloride	5.81E-02	5.81E-02	2.07E-02	4.40E-06	4.40E-06	2.56E-07	9.11E-08	3.47E-07
<i>Parcel E</i> Vinyl Chloride	5.81E-02	5.81E-02	2.07E-02	4.40E-06	4.40E-06	2.56E-07	9.11E-08	3.47E-07

**Where:**

AT-C (hours) = (70 [lifetime in years] x 365 days/year x 24 hours/day)  
 CA (ug/m3) = Contaminant concentration in air (calculated using Johnson and Ettinger Model)  
 EC (ug/m3) = Exposure concentration for estimating cancer risk  
 ED (years) = Exposure Duration

EF (days/year) = Exposure Frequency  
 ET (hours/day) = Exposure Time  
 IUR<sub>EL</sub> (ug/m3)<sup>-1</sup> = Inhalation Unit Risk for Early Lifetime Exposure  
 IUR<sub>LL</sub> (ug/m3)<sup>-1</sup> = Inhalation Unit Risk for Later Lifetime Exposure

IUR<sub>EL</sub> = IUR for Lifetime exposure from birth - IUR for Lifetime exposure during adulthood  
 = 8.8E-6 (ug/m<sup>3</sup>)<sup>-1</sup> - 4.4E-6 (ug/m<sup>3</sup>)<sup>-1</sup> = 4.4E-6 (ug/m<sup>3</sup>)<sup>-1</sup>

**Sources:**

<sup>1</sup> USEPA, 2014. OSWER Directive 9200.1-120. April 2014.

**APPENDIX E**  
**RISK AND HAZARD TABLES**

**Table E-1**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Current / Future Trespasser (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Current / Future  
 Receptor Population: Trespasser  
 Receptor Age: Adolescent

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Surface Soil	Surface Soil	Surface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	3.29E+02	mg/kg	2.9E-05	mg/kg-day	2.1E-03	kg-day/mg	6E-08	2.0E-04	mg/kg-day	6.0E-03	mg/kg-day	0.03		
			Exp. Route Total						6E-08						0.03			
			Dermal	VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
			Exp. Route Total						NA							NA		
	Exposure Point Total										6E-08					0.03		
	Exposure Medium Total										6E-08					0.03		
	Air	Volatiles at Parcel A		Inhalation	VOCs Tetrachloroethene	1.18E+02	ug/m3	3.8E-01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	1E-07	2.7E+00	ug/m3	4.0E+01	ug/m3	0.07	
				Exp. Route Total								1E-07					0.07	
				Exposure Point Total										1E-07				0.07
				Exposure Medium Total										1E-07				0.07
Surface Soil Total										2E-07					0.1			
Total Receptor Risk										Total of Receptor Risks Across Surface Soil	2E-07			Total of Receptor Hazards Across SS	0.1			

NA - Not Applicable.

**Table E-2**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Surface Soil	Surface Soil	Surface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	3.29E+02	mg/kg	1.3E-05	mg/kg-day	2.1E-03	kg-day/mg	3E-08	9.3E-04	mg/kg-day	1.0E-01	mg/kg-day	0.01			
			Exp. Route Total						3E-08						0.01				
			Dermal	VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA		
			Exp. Route Total						NA							NA			
	Exposure Point Total										3E-08					0.01			
	Exposure Medium Total										3E-08					0.01			
	Air	Volatiles at Parcel A		Inhalation	VOCs Tetrachloroethene	6.46E+02	ug/m3	2.1E+00	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	5E-07	1.5E+02	ug/m3	4.0E+01	ug/m3	3.7		
				Exp. Route Total								5E-07					3.7		
				Exposure Point Total										5E-07					3.7
				Exposure Medium Total										5E-07					3.7
Surface Soil Total										6E-07					3.7				
Subsurface Soil	Subsurface Soil	Subsurface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	2.08E+01	mg/kg	8.4E-07	mg/kg-day	2.1E-03	kg-day/mg	2E-09	5.9E-05	mg/kg-day	1.0E-01	mg/kg-day	0.001			
			Exp. Route Total								2E-09					0.001			
			Dermal	VOCs Tetrachloroethene	2.08E+01	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA		
			Exp. Route Total									NA					NA		
			Exposure Point Total										2E-09					0.001	
Exposure Medium Total										2E-09					0.001				



**Table E-2**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Subsurface Soil	Air	Particulates at Parcel A	Inhalation	VOCs Tetrachloroethene	4.08E+01	ug/m3	1.3E-01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	3E-08	9.3E+00	ug/m3	4.0E+01	ug/m3	0.23			
					Exp. Route Total						3E-08			0.23					
					Exposure Point Total						3E-08			0.23					
					Exposure Medium Total						3E-08			0.23					
Subsurface Soil Total											4E-08								
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	VOCs Tetrachloroethene Trichloroethylene	1.22E+01	mg/L	3.0E-05	mg/kg-day	2.1E-03	kg-day/mg	6E-08	2.1E-03	mg/kg-day	1.0E-01	mg/kg-day	0.02			
					1.79E-02	mg/L	4.4E-08	mg/kg-day	4.6E-02	kg-day/mg	2E-09	3.1E-06	mg/kg-day	5.0E-04	mg/kg-day	0.006			
					Exp. Route Total						6E-08			0.03					
			Dermal	VOCs Tetrachloroethene Trichloroethylene	1.22E+01	mg/L	9.8E-04	mg/kg-day	2.1E-03	kg-day/mg	2E-06	6.8E-02	mg/kg-day	1.0E-01	mg/kg-day	1			
					1.79E-02	mg/L	4.5E-07	mg/kg-day	4.6E-02	kg-day/mg	2E-08	3.1E-05	mg/kg-day	5.0E-04	mg/kg-day	0.06			
					Exp. Route Total						2E-06			1					
			Exposure Point Total						2E-06			1							
			Exposure Medium Total						2E-06			1							
			Groundwater	Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	VOCs Tetrachloroethene Trichloroethylene	8.89E+04	ug/m3	1.45E+02	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	4E-05	1.0E+04	ug/m3	4.0E+01	ug/m3	254
								1.44E+02	ug/m3	2.35E-01	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	1E-06	1.6E+01	ug/m3	2.0E+00	ug/m3	8
Exp. Route Total										4E-05			262						
Exposure Point Total										4E-05			262						
Exposure Medium Total						4E-05			262										
Groundwater Total											4E-05			263					
Total Receptor Risk							Total of Receptor Risks Across Surface Soil, Subsurface Soil, and Groundwater				4E-05	Total of Receptor Hazards Across SS, SSS, and GW				267			

NA - Not Applicable.

**Table E-3**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations																					
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient																	
							Value	Units	Value	Units		Value	Units	Value	Units																		
Surface Soil	Surface Soil	Surface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	3.29E+02	mg/kg	5.0E-05	mg/kg-day	2.1E-03	kg-day/mg	1E-07	1.4E-04	mg/kg-day	6.0E-03	mg/kg-day	0.02																	
			Exp. Route Total																							0.02							
			Dermal														VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA			
			Exp. Route Total																														
	Exposure Point Total										1E-07						0.02																
	Exposure Medium Total										1E-07						0.02																
	Air	Volatiles at Parcel A		Inhalation	VOCs Tetrachloroethene	1.18E+02	ug/m3	9.6E+00	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	2E-06	2.7E+01	ug/m3	4.0E+01	ug/m3	0.7																
				Exp. Route Total																										0.7			
				Exposure Point Total																					2E-06						0.7		
				Exposure Medium Total																					2E-06						0.7		
Surface Soil Total																		3E-06					0.7										
Subsurface Soil	Subsurface Soil	Subsurface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	2.08E+01	mg/kg	3.2E-06	mg/kg-day	2.1E-03	kg-day/mg	7E-09	8.9E-06	mg/kg-day	6.0E-03	mg/kg-day	0.001																	
			Exp. Route Total																												0.001		
			Dermal														VOCs Tetrachloroethene	2.08E+01	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA		
			Exp. Route Total																														
			Exposure Point Total																						7E-09							7E-09	
Exposure Medium Total											7E-09							7E-09				0.001											
Subsurface Soil Total																		7E-09				0.001											

**Table E-3**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	VOCs															
				Tetrachloroethene	1.22E+01	mg/L	3.7E-02	mg/kg-day	2.1E-03	kg-day/mg	8E-05	1.0E-01	mg/kg-day	6.0E-03	mg/kg-day	17			
				Trichloroethylene	1.79E-02	mg/L	5.5E-05	mg/kg-day	4.6E-02	kg-day/mg	3E-06	1.5E-04	mg/kg-day	5.0E-04	mg/kg-day	0.3			
			Exp. Route Total							8E-05					18				
			Dermal	VOCs															
				Tetrachloroethene	1.22E+01	mg/L	2.6E-03	mg/kg-day	2.1E-03	kg-day/mg	6E-06	7.4E-03	mg/kg-day	6.0E-03	mg/kg-day	1			
	Trichloroethylene	1.79E-02		mg/L	1.1E-06	mg/kg-day	4.6E-02	kg-day/mg	5E-08	3.0E-06	mg/kg-day	5.0E-04	mg/kg-day	0.006					
	Exp. Route Total							6E-06					1						
	Exposure Point Total							9E-05						19					
	Exposure Medium Total							9E-05						19					
	Groundwater	Indoor Air Via Vapor Intrusion		Inhalation	VOCs														
					Tetrachloroethene	3.05E+02	ug/m3	2.49E+01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	6E-06	7.0E+01	ug/m3	4.0E+01	ug/m3	2		
Trichloroethylene					3.42E-01	ug/m3	2.79E-02	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	1E-07	7.8E-02	ug/m3	2.0E+00	ug/m3	0.04			
Exp. Route Total										7E-06					2				
Exposure Point Total							7E-06						2						
Exposure Medium Total							7E-06						2						
Groundwater Total							9E-05						21						
Total Receptor Risk							Total of Receptor Risks Across Surface Soil, Subsurface Soil, and Groundwater				1E-04		Total of Receptor Hazards Across SS, SSS, and GW		21				

NA - Not Applicable.

**Table E-4**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Surface Soil	Surface Soil	Surface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	3.29E+02	mg/kg	4.7E-04	mg/kg-day	2.1E-03	kg-day/mg	1E-06	3.9E-04	mg/kg-day	6.0E-03	mg/kg-day	0.07			
			Exp. Route Total						1E-06					0.07					
			Dermal	VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA			
			Exp. Route Total						NA					NA					
	Exposure Point Total										1E-06					0.07			
	Exposure Medium Total										1E-06					0.07			
	Air	Volatiles at Parcel A		Inhalation	VOCs Tetrachloroethene	1.18E+02	ug/m3	4.2E+01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	1E-05	1.1E+02	ug/m3	4.0E+01	ug/m3	3		
				Exp. Route Total								1E-05					2.8		
				Exposure Point Total										1E-05					3
				Exposure Medium Total										1E-05					3
Surface Soil Total										1E-05					3				
Subsurface Soil	Subsurface Soil	Subsurface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	2.08E+01	mg/kg	3.0E-05	mg/kg-day	2.1E-03	kg-day/mg	6E-08	2.5E-05	mg/kg-day	6.0E-03	mg/kg-day	0.004			
			Exp. Route Total								6E-08					0.004			
			Dermal	VOCs Tetrachloroethene	2.08E+01	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA		
			Exp. Route Total									NA					NA		
			Exposure Point Total										6E-08					0.004	
Exposure Medium Total										6E-08					0.004				
Subsurface Soil Total										6E-08					0.004				

**Table E-4**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Tetrachloroethene Trichloroethylene	1.22E+01	mg/L	1.6E-01	mg/kg-day	2.1E-03	kg-day/mg	3E-04	3.7E-01	mg/kg-day	6.0E-03	mg/kg-day	61			
					1.79E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-05	5.4E-04	mg/kg-day	5.0E-04	mg/kg-day	1			
					Exp. Route Total								3E-04					62	
			Dermal	VOCs Tetrachloroethene Trichloroethylene	1.22E+01	mg/L	9.4E-02	mg/kg-day	2.1E-03	kg-day/mg	2E-04	2.2E-01	mg/kg-day	6.0E-03	mg/kg-day	37			
					1.79E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-06	9.0E-05	mg/kg-day	5.0E-04	mg/kg-day	0.2			
					Exp. Route Total								2E-04					37	
			Exposure Point Total								5E-04					99			
			Exposure Medium Total								5E-04					99			
			Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	VOCs Tetrachloroethene Trichloroethylene	6.12E+03	ug/m3	6.45E+01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	2E-05	1.7E+02	ug/m3	4.0E+01	ug/m3	4	
							8.94E+00	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	2E-05	2.5E-01	ug/m3	2.0E+00	ug/m3	0.1	
							Exp. Route Total								4E-05				
					Exposure Point Total								4E-05					4	
					Indoor Air Via Vapor Intrusion	Inhalation	VOCs Tetrachloroethene Trichloroethylene	1.21E+03	ug/m3	4.31E+02	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	1E-04	1.2E+03	ug/m3	4.0E+01	ug/m3	29
								1.34E+00	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	3E-06	1.3E+00	ug/m3	2.0E+00	ug/m3	0.6
			Exp. Route Total											1E-04					30
Exposure Point Total								1E-04					30						
Exposure Medium Total								2E-04					34						
Groundwater Total								7E-04					133						
Total Receptor Risk							Total of Receptor Risks Across Surface Soil, Subsurface Soil, and Groundwater				7E-04	Total of Receptor Hazards Across SS, SSS, and GW				136			

(1) Refer to Appendix D for the risk estimates for trichloroethylene.

NA - Not Applicable.

**Table E-5**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations					
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient	
							Value	Units	Value	Units		Value	Units	Value	Units		
Surface Soil	Surface Soil	Surface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	4.2E-03	mg/kg-day	6.0E-03	mg/kg-day	0.7	
			Exp. Route Total					NA							0.7		
			Dermal	VOCs Tetrachloroethene	3.29E+02	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
			Exp. Route Total						NA						NA		
	Exposure Point Total								NA						0.7		
	Exposure Medium Total								NA						0.7		
	Air	Particulates at Parcel A		Inhalation	VOCs Tetrachloroethene	1.18E+02	ug/m3	NA	NA	NA	NA	NA	1.1E+02	ug/m3	4.0E+01	ug/m3	3
				Exp. Route Total							NA					2.83	
				Exposure Point Total								NA					2.83
				Exposure Medium Total								NA					2.83
Surface Soil Total								NA						4			
Subsurface Soil	Subsurface Soil	Subsurface Soil at Parcel A	Ingestion	VOCs Tetrachloroethene	2.08E+01	mg/kg	NA	NA	NA	NA	NA	2.7E-04	mg/kg-day	6.0E-03	mg/kg-day	0.04	
			Exp. Route Total							NA					0.04		
			Dermal	VOCs Tetrachloroethene	2.08E+01	mg/kg	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
			Exp. Route Total								NA				NA		
			Exposure Point Total								NA					0.04	
Exposure Medium Total								NA					0.04				
Subsurface Soil Total								NA						0.04			

**Table E-5**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel A)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Groundwater	Groundwater	Groundwater	Ingestion	VOCs														
				Tetrachloroethene	1.22E+01	mg/L	NA	NA	NA	NA	NA	6.1E-01	mg/kg-day	6.0E-03	mg/kg-day	102		
				Trichloroethylene	1.79E-02	mg/L	NA	NA	NA	NA	NA	8.9E-04	mg/kg-day	5.0E-04	mg/kg-day	2		
				Exp. Route Total							NA					103		
				Dermal														
				VOCs														
			Tetrachloroethene	1.22E+01	mg/L	NA	NA	NA	NA	NA	3.2E-01	mg/kg-day	6.0E-03	mg/kg-day	54			
			Trichloroethylene	1.79E-02	mg/L	NA	NA	NA	NA	NA	1.3E-04	mg/kg-day	5.0E-04	mg/kg-day	0.3			
			Exp. Route Total								NA					54		
			Exposure Point Total								NA						157	
			Exposure Medium Total								NA						157	
			Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs												
						Tetrachloroethene	1.21E+03	ug/m3	NA	NA	NA	NA	NA	1.2E+03	ug/m3	4.0E+01	ug/m3	29
						Trichloroethylene	1.98E+01	ug/m3	NA	NA	NA	NA	NA	1.9E+01	ug/m3	2.0E+00	ug/m3	10
						Exp. Route Total								NA				
Exposure Point Total											NA					39		
Exposure Medium Total								NA						39				
Groundwater Total								NA							196			
Total Receptor Risk								Total of Receptor Risks Across Surface Soil, Subsurface Soil, and Groundwater	NA					Total of Receptor Hazards Across SS, SSS, and GW	200			

NA - Not Applicable.

**Table E-6**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel B)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	VOCs Trichloroethylene	1.00E-02	mg/L	2.5E-08	mg/kg-day	4.6E-02	kg-day/mg	1E-09	1.7E-06	mg/kg-day	5.0E-04	mg/kg-day	0.003		
			Exp. Route Total						1E-09					0.003				
			Dermal	VOCs Trichloroethylene	1.00E-02	mg/L	2.5E-07	mg/kg-day	4.6E-02	kg-day/mg	1E-08	1.8E-05	mg/kg-day	5.0E-04	mg/kg-day	0.04		
			Exp. Route Total							1E-08					0.04			
	Exposure Point Total										1E-08					0.04		
	Exposure Medium Total										1E-08					0.04		
	Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	VOCs Trichloroethylene	7.24E+01	ug/m3	1.18E-01	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	5E-07	8.3E+00	ug/m3	2.0E+00	ug/m3	4		
				Exp. Route Total								5E-07				4		
				Exposure Point Total										5E-07				4
				Exposure Medium Total										5E-07				4
Groundwater Total											5E-07				4			
Total Receptor Risk										Total of Receptor Risks Across Groundwater		5E-07	Total of Receptor Hazards Across GW				4	

NA - Not Applicable.



**Table E-7**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel B)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations				Noncancer Hazard Calculations																							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient																		
							Value	Units	Value	Units		Value	Units	Value	Units																			
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.00E-02	mg/L	3.1E-05	mg/kg-day	4.6E-02	kg-day/mg	1E-06	8.6E-05	mg/kg-day	5.0E-04	mg/kg-day	0.2																		
																	Exp. Route Total										0.2							
			Dermal	VOCs Trichloroethylene	1.00E-02	mg/L	6.0E-07	mg/kg-day	4.6E-02	kg-day/mg	3E-08	1.7E-06	mg/kg-day	5.0E-04	mg/kg-day	0.003																		
																	Exp. Route Total										0.003							
			Exposure Point Total																															
			Exposure Medium Total																															
			Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	1.72E-01	ug/m3	1.40E-02	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	6E-08	3.9E-02	ug/m3	2.0E+00	ug/m3	0.02																
																			Exp. Route Total															
																			Exposure Point Total															
			Exposure Medium Total																															
Groundwater Total																																		
Total Receptor Risk										Total of Receptor Risks Across Groundwater	1E-06	Total of Receptor Hazards Across GW				0.2																		

NA - Not Applicable.

**Table E-8**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel B)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations				Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units					
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.00E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	9E-06	3.0E-04	mg/kg-day	5.0E-04	mg/kg-day	0.6		
			Exp. Route Total						9E-06						0.6			
			Dermal	VOCs Trichloroethylene	1.00E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	1E-06	5.0E-05	mg/kg-day	5.0E-04	mg/kg-day	0.1		
			Exp. Route Total							1E-06						0.1		
			Exposure Point Total							1E-05						0.7		
	Exposure Medium Total								1E-05						0.7			
	Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	VOCs Trichloroethylene	5.00E+00	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	1E-05	1.4E-01	ug/m3	2.0E+00	ug/m3	0.07		
				Exp. Route Total							1E-05					0.07		
				Exposure Point Total							1E-05						0.07	
				Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.74E-01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	1E-06	6.5E-01	ug/m3	2.0E+00	ug/m3	0.3
						Exp. Route Total							1E-06					0.3
	Exposure Point Total								1E-06						0.3			
	Exposure Medium Total								1E-05						0.4			
	Groundwater Total										2E-05					1		
	Total Receptor Risk										Total of Receptor Risks Across Groundwater		Total of Receptor Hazards Across GW		1			

(1) Refer to Appendix D for the risk estimates for trichloroethylene.

**Table E-9**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel B)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations				
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient
							Value	Units	Value	Units		Value	Units	Value	Units	
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.00E-02	mg/L	NA	NA	NA	NA	NA	5.0E-04	mg/kg-day	5.0E-04	mg/kg-day	1
			Exp. Route Total					NA							1	
			Dermal	VOCs Trichloroethylene	1.00E-02	mg/L	NA	NA	NA	NA	NA	7.3E-05	mg/kg-day	5.0E-04	mg/kg-day	0.1
			Exp. Route Total						NA						0.1	
		Exposure Point Total						NA						1		
		Exposure Medium Total						NA						1		
	Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.74E-01	ug/m3	NA	NA	NA	NA	NA	6.5E-01	ug/m3	2.0E+00	ug/m3	0.3
				Exp. Route Total						NA						0.3
				Exposure Point Total						NA						0.3
		Exposure Medium Total						NA						0.3		
	Groundwater Total						NA							1		
	Total Receptor Risk						Total of Receptor Risks Across Groundwater			NA		Total of Receptor Hazards Across GW			1	

NA - Not Applicable.

**Table E-10**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel C)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations					
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient	
							Value	Units	Value	Units		Value	Units	Value	Units		
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	VOCs Trichloroethylene	4.43E-03	mg/L	1.1E-08	mg/kg-day	4.6E-02	kg-day/mg	5E-10	7.6E-07	mg/kg-day	5.0E-04	mg/kg-day	0.002	
			Exp. Route Total						5E-10						0.002		
			Dermal	VOCs Trichloroethylene	4.43E-03	mg/L	1.1E-07	mg/kg-day	4.6E-02	kg-day/mg	5E-09	7.8E-06	mg/kg-day	5.0E-04	mg/kg-day	0.02	
			Exp. Route Total							5E-09					0.02		
	Exposure Point Total										6E-09				0.02		
	Exposure Medium Total										6E-09				0.02		
	Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	VOCs Trichloroethylene	3.21E+01	ug/m3	5.23E-02	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	2E-07	3.7E+00	ug/m3	2.0E+00	ug/m3	2	
				Exp. Route Total								2E-07				2	
				Exposure Point Total										2E-07			2
				Exposure Medium Total										2E-07			2
Groundwater Total										2E-07				2			
Total Receptor Risk										Total of Receptor Risks Across Groundwater		2E-07	Total of Receptor Hazards Across GW				2

NA - Not Applicable.

**Table E-11**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel C)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations				Noncancer Hazard Calculations															
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient										
							Value	Units	Value	Units		Value	Units													
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	4.43E-03	mg/L	1.4E-05	mg/kg-day	4.6E-02	kg-day/mg	6E-07	3.8E-05	mg/kg-day	5.0E-04	mg/kg-day	0.1										
			Exp. Route Total																						0.1	
			Dermal	VOCs Trichloroethylene	4.43E-03	mg/L	2.7E-07	mg/kg-day	4.6E-02	kg-day/mg	1E-08	7.4E-07	mg/kg-day	5.0E-04	mg/kg-day	0.001										
			Exp. Route Total																						0.001	
			Exposure Point Total																0.1							
			Exposure Medium Total																	0.1						
			Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	7.63E-02	ug/m3	6.22E-03	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	3E-08	1.7E-02	ug/m3	2.0E+00	ug/m3	0.009								
																			Exp. Route Total							
						Exposure Point Total																	0.009			
						Exposure Medium Total																	0.009			
Groundwater Total																				7E-07						0.1
Total Receptor Risk											Total of Receptor Risks Across Groundwater				7E-07	Total of Receptor Hazards Across GW				0.09						

NA - Not Applicable.

**Table E-12**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel C)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations				Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units					
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	4.43E-03	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	4E-06	1.3E-04	mg/kg-day	5.0E-04	mg/kg-day	0.3		
			Exp. Route Total						4E-06						0.3			
			Dermal	VOCs Trichloroethylene	4.43E-03	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	6E-07	2.2E-05	mg/kg-day	5.0E-04	mg/kg-day	0.04		
			Exp. Route Total							6E-07						0.04		
			Exposure Point Total								5E-06						0.3	
			Exposure Medium Total								5E-06						0.3	
	Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	VOCs Trichloroethylene	2.22E+00	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	5E-06	6.3E-02	ug/m3	2.0E+00	ug/m3	0.03		
				Exp. Route Total							5E-06						0.03	
				Exposure Point Total								5E-06						0.03
		Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	2.98E-01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	6E-07	2.9E-01	ug/m3	2.0E+00	ug/m3	0.1		
				Exp. Route Total								6E-07						0.1
				Exposure Point Total								6E-07						0.1
	Exposure Medium Total									5E-06						0.2		
	Groundwater Total									1E-05						0.5		
	Total Receptor Risk										Total of Receptor Risks Across Groundwater		1E-05	Total of Receptor Hazards Across GW			0.5	

(1) Refer to Appendix D for the risk estimates for trichloroethylene.

**Table E-13**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel C)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations				
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient
							Value	Units	Value	Units		Value	Units	Value	Units	
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	4.43E-03	mg/L	NA	NA	NA	NA	NA	2.2E-04	mg/kg-day	5.0E-04	mg/kg-day	0.4
			Exp. Route Total					NA							0.4	
			Dermal	VOCs Trichloroethylene	4.43E-03	mg/L	NA	NA	NA	NA	NA	3.2E-05	mg/kg-day	5.0E-04	mg/kg-day	0.06
			Exp. Route Total						NA						0.06	
	Exposure Point Total									NA					0.5	
	Exposure Medium Total									NA					0.5	
	Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	2.98E-01	ug/m3	NA	NA	NA	NA	NA	2.9E-01	ug/m3	2.0E+00	ug/m3	0.1
				Exp. Route Total							NA					0.1
				Exposure Point Total									NA			
	Exposure Medium Total									NA					0.1	
Groundwater Total									NA						0.6	
Total Receptor Risk							Total of Receptor Risks Across Groundwater				NA	Total of Receptor Hazards Across GW				0.6

NA - Not Applicable.

**Table E-14**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel D)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	VOCs Trichloroethylene	1.98E-02	mg/L	4.8E-08	mg/kg-day	4.6E-02	kg-day/mg	2E-09	3.4E-06	mg/kg-day	5.0E-04	mg/kg-day	0.007		
			Exp. Route Total						2E-09					0.007				
			Dermal	VOCs Trichloroethylene	1.98E-02	mg/L	5.0E-07	mg/kg-day	4.6E-02	kg-day/mg	2E-08	3.5E-05	mg/kg-day	5.0E-04	mg/kg-day	0.07		
			Exp. Route Total							2E-08					0.07			
	Exposure Point Total										3E-08					0.08		
	Exposure Medium Total										3E-08					0.08		
	Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	VOCs Trichloroethylene	1.43E+02	ug/m3	2.33E-01	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	1E-06	1.6E+01	ug/m3	2.0E+00	ug/m3	8		
				Exp. Route Total								1E-06				8		
				Exposure Point Total										1E-06				8
				Exposure Medium Total										1E-06				8
Groundwater Total										1E-06					8			
Total Receptor Risk										Total of Receptor Risks Across Groundwater	1E-06	Total of Receptor Hazards Across GW				8		

NA - Not Applicable.



**Table E-15**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel D)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.98E-02	mg/L	6.0E-05	mg/kg-day	4.6E-02	kg-day/mg	3E-06	1.7E-04	mg/kg-day	5.0E-04	mg/kg-day	0.3		
			Exp. Route Total								3E-06					0.3		
			Dermal	VOCs Trichloroethylene	1.98E-02	mg/L	1.2E-06	mg/kg-day	4.6E-02	kg-day/mg	5E-08	3.3E-06	mg/kg-day	5.0E-04	mg/kg-day	0.007		
			Exp. Route Total								5E-08					0.007		
			Exposure Point Total								3E-06					0.3		
			Exposure Medium Total								3E-06					0.3		
			Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	1.55E-01	ug/m3	1.27E-02	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	5E-08	3.5E-02	ug/m3	2.0E+00	ug/m3	0.02
			Exp. Route Total										5E-08				0.02	
			Exposure Point Total										5E-08				0.02	
			Exposure Medium Total										5E-08				0.02	
Groundwater Total														3E-06			0.4	
Total Receptor Risk											Total of Receptor Risks Across Groundwater			3E-06	Total of Receptor Hazards Across GW			0.4

NA - Not Applicable.

**Table E-16**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel D)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations						
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient		
							Value	Units	Value	Units		Value	Units	Value	Units			
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.98E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-05	5.9E-04	mg/kg-day	5.0E-04	mg/kg-day	1		
			Exp. Route Total						2E-05						1			
			Dermal	VOCs Trichloroethylene	1.98E-02	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	3E-06	9.9E-05	mg/kg-day	5.0E-04	mg/kg-day	0.2		
			Exp. Route Total							3E-06						0.2		
			Exposure Point Total							2E-05						1		
			Exposure Medium Total							2E-05						1		
	Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	VOCs Trichloroethylene	9.88E+00	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	2E-05	2.8E-01	ug/m3	2.0E+00	ug/m3	0.1		
				Exp. Route Total							2E-05					0.1		
				Exposure Point Total							2E-05					0.1		
				Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.08E-01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	1E-06	5.8E-01	ug/m3	2.0E+00	ug/m3	0.3
						Exp. Route Total							1E-06					0.3
						Exposure Point Total							1E-06					0.3
Exposure Medium Total							2E-05						0.4					
Groundwater Total									4E-05					2				
Total Receptor Risk										Total of Receptor Risks Across Groundwater		Total of Receptor Hazards Across GW				2		

(1) Refer to Appendix D for the risk estimates for trichloroethylene.

**Table E-17**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel D)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations				
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient
							Value	Units	Value	Units		Value	Units	Value	Units	
Groundwater	Groundwater	Groundwater	Ingestion	VOCs Trichloroethylene	1.98E-02	mg/L	NA	NA	NA	NA	NA	9.9E-04	mg/kg-day	5.0E-04	mg/kg-day	2
			Exp. Route Total					NA							2	
			Dermal	VOCs Trichloroethylene	1.98E-02	mg/L	NA	NA	NA	NA	NA	1.4E-04	mg/kg-day	5.0E-04	mg/kg-day	0.3
			Exp. Route Total						NA						0.3	
	Exposure Point Total								NA						2	
	Exposure Medium Total								NA						2	
	Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.08E-01	ug/m3	NA	NA	NA	NA	NA	5.8E-01	ug/m3	2.0E+00	ug/m3	0.3
				Exp. Route Total						NA						0.3
				Exposure Point Total								NA				
	Exposure Medium Total								NA						0.3	
Groundwater Total								NA							3	
Total Receptor Risk							Total of Receptor Risks Across Groundwater				NA	Total of Receptor Hazards Across GW				3

NA - Not Applicable.

**Table E-18**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel E)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	4.37E-03	mg/L	1.1E-08	mg/kg-day	NA	kg-day/mg	NA	7.5E-07	mg/kg-day	2.0E-02	mg/kg-day	0.00004			
				Trichloroethylene	1.45E-01	mg/L	3.5E-07	mg/kg-day	4.6E-02	kg-day/mg	2E-08	2.5E-05	mg/kg-day	5.0E-04	mg/kg-day	0.05			
				Vinyl Chloride	3.40E-05	mg/L	8.3E-11	mg/kg-day	7.2E-01	kg-day/mg	6E-11	5.8E-09	mg/kg-day	3.0E-03	mg/kg-day	0.000002			
				Exp. Route Total							2E-08					0.05			
				Dermal															
			<i>VOCs</i>																
			cis-1,2-Dichloroethene	4.37E-03	mg/L	9.6E-08	mg/kg-day	NA	kg-day/mg	NA	6.7E-06	mg/kg-day	2.0E-02	mg/kg-day	0.0003				
			Trichloroethylene	1.45E-01	mg/L	3.6E-06	mg/kg-day	4.6E-02	kg-day/mg	2E-07	2.5E-04	mg/kg-day	5.0E-04	mg/kg-day	0.5				
			Vinyl Chloride	3.40E-05	mg/L	5.4E-10	mg/kg-day	7.2E-01	kg-day/mg	4E-10	3.8E-08	mg/kg-day	3.0E-03	mg/kg-day	0.00001				
			Exp. Route Total								2E-07				0.5				
			Exposure Point Total								2E-07				0.6				
			Exposure Medium Total								2E-07				0.6				
			Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	<i>VOCs</i>													
						Trichloroethylene	1.05E+03	ug/m3	1.71E+00	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	7E-06	1.2E+02	ug/m3	2.0E+00	ug/m3	60	
Exp. Route Total											7E-06				60				
Exposure Point Total											7E-06				60				
Exposure Medium Total								7E-06				60							
Groundwater Total								7E-06				60							
Total Receptor Risk										Total of Receptor Risks Across Groundwater		7E-06	Total of Receptor Hazards Across GW				60		

NA - Not Applicable.

**Table E-19**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel E)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	4.37E-03	mg/L	1.3E-05	mg/kg-day	NA	kg-day/mg	NA	3.7E-05	mg/kg-day	2.0E-03	mg/kg-day	0.02			
				Trichloroethylene	1.45E-01	mg/L	4.4E-04	mg/kg-day	4.6E-02	kg-day/mg	2E-05	1.2E-03	mg/kg-day	5.0E-04	mg/kg-day	2			
				Vinyl Chloride	3.40E-05	mg/L	1.0E-07	mg/kg-day	7.2E-01	kg-day/mg	7E-08	2.9E-07	mg/kg-day	3.0E-03	mg/kg-day	0.0001			
			Exp. Route Total							2E-05					2				
			Dermal	<i>VOCs</i>															
				cis-1,2-Dichloroethene	4.37E-03	mg/L	2.0E-07	mg/kg-day	NA	kg-day/mg	NA	5.6E-07	mg/kg-day	2.0E-03	mg/kg-day	0.0003			
				Trichloroethylene	1.45E-01	mg/L	8.7E-06	mg/kg-day	4.6E-02	kg-day/mg	4E-07	2.4E-05	mg/kg-day	5.0E-04	mg/kg-day	0.05			
				Vinyl Chloride	3.40E-05	mg/L	9.8E-10	mg/kg-day	7.2E-01	kg-day/mg	7E-10	2.7E-09	mg/kg-day	3.0E-03	mg/kg-day	0.000009			
			Exp. Route Total							4E-07					0.05				
Exposure Point Total							2E-05					3							
Exposure Medium Total							2E-05					3							
Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	<i>VOCs</i>																
			Trichloroethylene	4.13E+00	ug/m3	3.37E-01	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	1E-06	9.4E-01	ug/m3	2.0E+00	ug/m3	0.5				
			Exp. Route Total							1E-06				0.5					
Exposure Point Total								1E-06				0.5							
Exposure Medium Total								1E-06				0.5							
Groundwater Total								2E-05				3							
Total Receptor Risk										Total of Receptor Risks Across Groundwater		2E-05	Total of Receptor Hazards Across GW				3		

NA - Not Applicable.

**Table E-20**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel E)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations								
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient				
							Value	Units	Value	Units		Value	Units	Value	Units					
Groundwater	Groundwater	Groundwater	Ingestion	<b>VOCs</b>																
				cis-1,2-Dichloroethene	4.37E-03	mg/L	5.6E-05	mg/kg-day	NA	kg-day/mg	NA	1.3E-04	mg/kg-day	2.0E-03	mg/kg-day	0.07				
				Trichloroethylene	1.45E-01	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	1E-04	4.3E-03	mg/kg-day	5.0E-04	mg/kg-day	9				
				Vinyl Chloride	3.40E-05	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-06	1.0E-06	mg/kg-day	3.0E-03	mg/kg-day	0.0003				
			<b>Exp. Route Total</b>							1E-04					9					
			Dermal	<b>VOCs</b>																
				cis-1,2-Dichloroethene	4.37E-03	mg/L	7.1E-06	mg/kg-day	NA	kg-day/mg	NA	1.7E-05	mg/kg-day	2.0E-03	mg/kg-day	0.008				
				Trichloroethylene	1.45E-01	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-05	7.3E-04	mg/kg-day	5.0E-04	mg/kg-day	1				
				Vinyl Chloride	3.40E-05	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	7E-07	8.2E-08	mg/kg-day	3.0E-03	mg/kg-day	0.00003				
			<b>Exp. Route Total</b>							2E-05					1					
			<b>Exposure Point Total</b>							1E-04					10					
			<b>Exposure Medium Total</b>							1E-04					10					
			Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	<b>VOCs</b>														
						cis-1,2-Dichloroethene	2.19E+00	ug/m3	2.30E-02	ug/m3	NA	(ug/m3) <sup>-1</sup>	NA	6.2E-02	ug/m3	NA	ug/m3	NA		
						Trichloroethylene	7.24E+01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	5E-09	2.1E+00	ug/m3	2.0E+00	ug/m3	1		
Vinyl Chloride	1.70E-02	ug/m3				(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	1E-07	4.8E-04	ug/m3	1.0E+02	ug/m3	0.000005					
<b>Exp. Route Total</b>										1E-07					1					
<b>Exposure Point Total</b>										1E-07					1					
Indoor Air Via Vapor Intrusion	Inhalation	<b>VOCs</b>																		
		Trichloroethylene	1.61E+01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	3E-05	1.5E+01	ug/m3	2.0E+00	ug/m3	8						
		<b>Exp. Route Total</b>							3E-05					8						
<b>Exposure Point Total</b>							3E-05					8								
<b>Exposure Medium Total</b>							3E-05					9								
<b>Groundwater Total</b>							2E-04						19							
<b>Total Receptor Risk</b>	<b>Total of Receptor Risks Across Groundwater</b>										2E-04	<b>Total of Receptor Hazards Across SS, SSS, and GW</b>				19				

(1) Refer to Appendix D for the risk estimates for trichloroethylene and vinyl chloride.  
 NA - Not Applicable.

**Table E-21**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel E)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	4.37E-03	mg/L	NA	NA	NA	NA	NA	2.2E-04	mg/kg-day	2.0E-03	mg/kg-day	0.1			
				Trichloroethylene	1.45E-01	mg/L	NA	NA	NA	NA	NA	7.2E-03	mg/kg-day	5.0E-04	mg/kg-day	14			
				Vinyl Chloride	3.40E-05	mg/L	NA	NA	NA	NA	NA	1.7E-06	mg/kg-day	3.0E-03	mg/kg-day	0.0006			
				Exp. Route Total															15
			Dermal	<i>VOCs</i>															
				cis-1,2-Dichloroethene	4.37E-03	mg/L	NA	NA	NA	NA	NA	2.4E-05	mg/kg-day	2.0E-03	mg/kg-day	0.01			
				Trichloroethylene	1.45E-01	mg/L	NA	NA	NA	NA	NA	1.1E-03	mg/kg-day	5.0E-04	mg/kg-day	2			
				Vinyl Chloride	3.40E-05	mg/L	NA	NA	NA	NA	NA	1.2E-07	mg/kg-day	3.0E-03	mg/kg-day	0.00004			
				Exp. Route Total															
	Exposure Point Total																17		
	Exposure Medium Total																17		
Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	<i>VOCs</i>																
			Trichloroethylene	1.61E+01	ug/m3	NA	NA	NA	NA	NA	1.5E+01	ug/m3	2.0E+00	ug/m3	8				
			Exp. Route Total															8	
	Exposure Point Total																8		
	Exposure Medium Total																8		
	Groundwater Total																24		
Total Receptor Risk										Total of Receptor Risks Across Groundwater		NA	Total of Receptor Hazards Across SS, SSS, and GW				24		

NA - Not Applicable.

**Table E-22**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Construction Worker (Parcel F)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Construction Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Shallow Groundwater	Shallow Groundwater (Trench)	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	2.2E-07	mg/kg-day	NA	kg-day/mg	NA	1.5E-05	mg/kg-day	2.0E-02	mg/kg-day	0.0008			
				Tetrachloroethene	1.90E-01	mg/L	4.7E-07	mg/kg-day	2.1E-03	kg-day/mg	1E-09	3.3E-05	mg/kg-day	1.0E-01	mg/kg-day	0.0003			
				Trichloroethylene	1.89E-01	mg/L	4.6E-07	mg/kg-day	4.6E-02	kg-day/mg	2E-08	3.2E-05	mg/kg-day	5.0E-04	mg/kg-day	0.06			
				Vinyl Chloride	1.80E-04	mg/L	4.4E-10	mg/kg-day	7.2E-01	kg-day/mg	3E-10	3.1E-08	mg/kg-day	3.0E-03	mg/kg-day	0.00001			
			Exp. Route Total							2E-08					0.07				
			Dermal	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	2.0E-06	mg/kg-day	NA	kg-day/mg	NA	1.4E-04	mg/kg-day	2.0E-02	mg/kg-day	0.01			
				Tetrachloroethene	1.90E-01	mg/L	1.5E-05	mg/kg-day	2.1E-03	kg-day/mg	3E-08	1.1E-03	mg/kg-day	1.0E-01	mg/kg-day	0.01			
				Trichloroethylene	1.89E-01	mg/L	4.8E-06	mg/kg-day	4.6E-02	kg-day/mg	2E-07	3.3E-04	mg/kg-day	5.0E-04	mg/kg-day	0.7			
				Vinyl Chloride	1.80E-04	mg/L	2.9E-09	mg/kg-day	7.2E-01	kg-day/mg	2E-09	2.0E-07	mg/kg-day	3.0E-03	mg/kg-day	0.00007			
			Exp. Route Total							3E-07					0.7				
			Exposure Point Total								3E-07					0.8			
			Exposure Medium Total								3E-07					0.8			
			Vapors from Shallow Groundwater	Vapors from Volatilization (Trench)	Inhalation	<i>VOCs</i>													
cis-1,2-Dichloroethene	7.52E+02	ug/m3				1.23E+00	ug/m3	NA	(ug/m3) <sup>-1</sup>	NA	8.6E+01	ug/m3	NA	ug/m3	NA				
Tetrachloroethene	1.23E+03	ug/m3				2.00E+00	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	5E-07	1.4E+02	ug/m3	4.0E+01	ug/m3	4				
Trichloroethylene	1.37E+03	ug/m3				2.24E+00	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	9E-06	1.6E+02	ug/m3	2.0E+00	ug/m3	78				
Vinyl Chloride	1.90E+00	ug/m3				3.09E-03	ug/m3	4.4E-06	(ug/m3) <sup>-1</sup>	1E-08	2.2E-01	ug/m3	1.0E+02	ug/m3	0.002				
Exp. Route Total							1E-05					82							
Exposure Point Total								1E-05					82						
Exposure Medium Total								1E-05					82						
Groundwater Total								1E-05					83						
Total Receptor Risk										Total of Receptor Risks Across Groundwater		1E-05	Total of Receptor Hazards Across GW				83		

NA - Not Applicable.



**Table E-23**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Industrial Worker (Parcel F)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Industrial Worker  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	2.7E-04	mg/kg-day	NA	kg-day/mg	NA	7.7E-04	mg/kg-day	2.0E-03	mg/kg-day	0.4			
				Tetrachloroethene	1.90E-01	mg/L	5.8E-04	mg/kg-day	2.1E-03	kg-day/mg	1E-06	1.6E-03	mg/kg-day	6.0E-03	mg/kg-day	0.3			
				Trichloroethylene	1.89E-01	mg/L	5.8E-04	mg/kg-day	4.6E-02	kg-day/mg	3E-05	1.6E-03	mg/kg-day	5.0E-04	mg/kg-day	3			
				Vinyl Chloride	1.80E-04	mg/L	5.5E-07	mg/kg-day	7.2E-01	kg-day/mg	4E-07	1.5E-06	mg/kg-day	3.0E-03	mg/kg-day	0.0005			
			Exp. Route Total							3E-05					4				
			Dermal	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	4.1E-06	mg/kg-day	NA	kg-day/mg	NA	1.1E-05	mg/kg-day	2.0E-03	mg/kg-day	0.006			
				Tetrachloroethene	1.90E-01	mg/L	4.1E-05	mg/kg-day	2.1E-03	kg-day/mg	9E-08	1.1E-04	mg/kg-day	6.0E-03	mg/kg-day	0.02			
				Trichloroethylene	1.89E-01	mg/L	1.1E-05	mg/kg-day	4.6E-02	kg-day/mg	5E-07	3.2E-05	mg/kg-day	5.0E-04	mg/kg-day	0.06			
				Vinyl Chloride	1.80E-04	mg/L	5.2E-09	mg/kg-day	7.2E-01	kg-day/mg	4E-09	1.4E-08	mg/kg-day	3.0E-03	mg/kg-day	0.000005			
			Exp. Route Total							6E-07					0.1				
			Exposure Point Total							3E-05						4			
			Exposure Medium Total							3E-05						4			
			Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	<i>VOCs</i>													
Tetrachloroethene	5.93E+00	ug/m3				4.83E-01	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	1E-07	1.4E+00	ug/m3	4.0E+01	ug/m3	0.03				
Trichloroethylene	4.53E+00	ug/m3				3.70E-01	ug/m3	4.1E-06	(ug/m3) <sup>-1</sup>	2E-06	1.0E+00	ug/m3	2.0E+00	ug/m3	0.5				
Vinyl Chloride	1.53E-02	ug/m3				1.25E-03	ug/m3	4.4E-06	(ug/m3) <sup>-1</sup>	5E-09	3.5E-03	ug/m3	1.0E+02	ug/m3	0.00003				
Exp. Route Total										2E-06					0.6				
Exposure Point Total							2E-06					0.6							
Exposure Medium Total							2E-06					0.6							
Groundwater Total							3E-05						5						
Total Receptor Risk	Total of Receptor Risks Across Groundwater										3E-05	Total of Receptor Hazards Across GW				5			

NA - Not Applicable.

**Table E-24**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Adult (Parcel F)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	<b>VOCs</b>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	1.2E-03	mg/kg-day	NA	kg-day/mg	NA	2.7E-03	mg/kg-day	2.0E-03	mg/kg-day	1			
				Tetrachloroethene	1.90E-01	mg/L	2.4E-03	mg/kg-day	2.1E-03	kg-day/mg	5E-06	5.7E-03	mg/kg-day	6.0E-03	mg/kg-day	0.9			
				Trichloroethylene	1.89E-01	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	2E-04	5.7E-03	mg/kg-day	5.0E-04	mg/kg-day	11			
				Vinyl Chloride	1.80E-04	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	9E-06	5.4E-06	mg/kg-day	3.0E-03	mg/kg-day	0.002			
			<b>Exp. Route Total</b>								2E-04				14				
			Dermal	<b>VOCs</b>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	1.5E-04	mg/kg-day	NA	kg-day/mg	NA	3.4E-04	mg/kg-day	2.0E-03	mg/kg-day	0.2			
				Tetrachloroethene	1.90E-01	mg/L	1.5E-03	mg/kg-day	2.1E-03	kg-day/mg	3E-06	3.4E-03	mg/kg-day	6.0E-03	mg/kg-day	1			
				Trichloroethylene	1.89E-01	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	3E-05	9.5E-04	mg/kg-day	5.0E-04	mg/kg-day	2			
				Vinyl Chloride	1.80E-04	mg/L	(1)	mg/kg-day	(1)	kg-day/mg	7E-07	4.3E-07	mg/kg-day	3.0E-03	mg/kg-day	0.0001			
			<b>Exp. Route Total</b>								3E-05				3				
			<b>Exposure Point Total</b>									2E-04				16			
			<b>Exposure Medium Total</b>									2E-04				16			
			Vapors from Groundwater	Water Vapors at Showerhead	Inhalation	<b>VOCs</b>													
cis-1,2-Dichloroethene	4.50E+01	ug/m3				4.74E-01	ug/m3	NA	(ug/m3) <sup>-1</sup>	NA	1.3E+00	ug/m3	NA	ug/m3	NA				
Tetrachloroethene	9.51E+01	ug/m3				1.00E+00	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	3E-07	2.7E+00	ug/m3	4.0E+01	ug/m3	0.07				
Trichloroethylene	9.47E+01	ug/m3				(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	2E-04	2.7E+00	ug/m3	2.0E+00	ug/m3	1				
Vinyl Chloride	9.00E-02	ug/m3				(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	5E-07	2.6E-03	ug/m3	1.0E+02	ug/m3	0.00003				
<b>Exp. Route Total</b>										2E-04					1				
<b>Exposure Point Total</b>											2E-04					1			
Indoor Air Via Vapor Intrusion	Inhalation	<b>VOCs</b>																	
		Tetrachloroethene				2.34E+01	ug/m3	8.35E+00	ug/m3	2.6E-07	(ug/m3) <sup>-1</sup>	2E-06	2.2E+01	ug/m3	4.0E+01	ug/m3	0.6		
		Trichloroethylene				1.77E+01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	4E-05	1.7E+01	ug/m3	2.0E+00	ug/m3	8		
		Vinyl Chloride	5.81E-02	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	3E-07	5.6E-02	ug/m3	1.0E+02	ug/m3	0.0006					
<b>Exp. Route Total</b>							4E-05					9							
<b>Exposure Point Total</b>								4E-05					9						
<b>Exposure Medium Total</b>								2E-04					10						
<b>Groundwater Total</b>								4E-04					27						
<b>Total Receptor Risk</b>										Total of Receptor Risks Across Groundwater		4E-04	<b>Total of Receptor Hazards Across SS, SSS, and GW</b>				27		

(1) Refer to Appendix D for the risk estimates for trichloroethylene and vinyl chloride.

NA - Not Applicable.

**Table E-25**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Future Resident Child (Parcel F)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations							
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient			
							Value	Units	Value	Units		Value	Units	Value	Units				
Groundwater	Groundwater	Groundwater	Ingestion	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	NA	NA	NA	NA	NA	4.5E-03	mg/kg-day	2.0E-03	mg/kg-day	2			
				Tetrachloroethene	1.90E-01	mg/L	NA	NA	NA	NA	NA	9.5E-03	mg/kg-day	6.0E-03	mg/kg-day	2			
				Trichloroethylene	1.89E-01	mg/L	NA	NA	NA	NA	NA	9.4E-03	mg/kg-day	5.0E-04	mg/kg-day	19			
				Vinyl Chloride	1.80E-04	mg/L	NA	NA	NA	NA	NA	9.0E-06	mg/kg-day	3.0E-03	mg/kg-day	0.003			
			Exp. Route Total								NA				23				
			Dermal	<i>VOCs</i>															
				cis-1,2-Dichloroethene	8.99E-02	mg/L	NA	NA	NA	NA	NA	5.0E-04	mg/kg-day	2.0E-03	mg/kg-day	0.2			
				Tetrachloroethene	1.90E-01	mg/L	NA	NA	NA	NA	NA	5.0E-03	mg/kg-day	6.0E-03	mg/kg-day	1			
				Trichloroethylene	1.89E-01	mg/L	NA	NA	NA	NA	NA	1.4E-03	mg/kg-day	5.0E-04	mg/kg-day	3			
				Vinyl Chloride	1.80E-04	mg/L	NA	NA	NA	NA	NA	6.1E-07	mg/kg-day	3.0E-03	mg/kg-day	0.0002			
			Exp. Route Total								NA				4				
			Exposure Point Total								NA				27				
			Exposure Medium Total								NA				27				
			Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	<i>VOCs</i>													
Tetrachloroethene	2.34E+01	ug/m3				NA	NA	NA	NA	NA	2.2E+01	ug/m3	4.0E+01	ug/m3	0.6				
Trichloroethylene	1.77E+01	ug/m3				NA	NA	NA	NA	NA	1.7E+01	ug/m3	2.0E+00	ug/m3	8				
Vinyl Chloride	5.81E-02	ug/m3				NA	NA	NA	NA	NA	5.6E-02	ug/m3	1.0E+02	ug/m3	0.0006				
Exp. Route Total											NA				9				
Exposure Point Total								NA				9							
Exposure Medium Total								NA				9							
Groundwater Total								NA				36							
Total Receptor Risk								Total of Receptor Risks Across Groundwater	NA			Total of Receptor Hazards Across SS, SSS, and GW	36						

NA - Not Applicable.

**Table E-26**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Current / Future Resident Adult (Parcel H)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Current / Future  
 Receptor Population: Resident  
 Receptor Age: Adult

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations					
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient	
							Value	Units	Value	Units		Value	Units	Value	Units		
Groundwater	Groundwater Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.08E-01	ug/m3	(1)	ug/m3	(1)	(ug/m3) <sup>-1</sup>	1E-06	5.8E-01	ug/m3	2.0E+00	ug/m3	0.3	
			Exp. Route Total								1E-06					0.3	
			Exposure Point Total								1E-06					0.3	
			Exposure Medium Total								1E-06					0.3	
			Groundwater Total								1E-06					0.3	
			Total Receptor Risk								Total of Receptor Risks Across Groundwater	1E-06				Total of Receptor Hazards Across SS, SSS, and GW	0.3

(1) Refer to Appendix D for the risk estimates for trichloroethylene.

**Table E-27**  
**Calculation Of Chemical Cancer Risks And Non-Cancer Hazards - Current / Future Resident Child (Parcel H)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Scenario Timeframe: Current / Future  
 Receptor Population: Resident  
 Receptor Age: Child

Medium	Exposure Medium	Exposure Point	Exposure Route	Chemical of Concern	EPC		Cancer Risk Calculations					Noncancer Hazard Calculations				
					Value	Units	Intake/Exposure Concentration		CSF/Unit Risk		Cancer Risk	Intake/Exposure Concentration		RfD/RfC		Hazard Quotient
							Value	Units	Value	Units		Value	Units	Value	Units	
Groundwater	Groundwater Vapors from Groundwater	Indoor Air Via Vapor Intrusion	Inhalation	VOCs Trichloroethylene	6.08E-01	ug/m3	NA	NA	NA	NA	NA	5.8E-01	ug/m3	2.0E+00	ug/m3	0.3
			Exp. Route Total								NA					0.3
			Exposure Point Total								NA					0.3
			Exposure Medium Total								NA					0.3
			Groundwater Total								NA					0.3
Total Receptor Risk					Total of Receptor Risks Across Groundwater					NA	Total of Receptor Hazards Across Groundwater					0.3

NA - Not Applicable.

**APPENDIX F**  
**JOHNSON AND ETTINGER MODELING OUTPUT**

**APPENDIX F.1**  
**JOHNSON AND ETTINGER MODELING OUTPUT**  
**FOR RISK**

**Table F.1-1  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	3.8E-05	#NAME?	0.0000	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	3.050E+02	#NAME?	3.0E+02	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	4.5E+01	#NAME?	4.5E+01	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	13751		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	8121660					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	4.921%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		



**Table F.1-1  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		



**Table F.1-1  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	3.8E-05	#NAME?	3.7E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	3.1E+02	#NAME?	3.0E+02	#NAME?	WARNING	Please review warning messages
	(ppbv)		4.5E+01	#NAME?	4.5E+01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	1.0E+05	#NAME?	1.0E+05	#NAME?		
	(ppbv)		1.5E+04	#NAME?	1.5E+04	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.0E-03	-	1.0E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	3.8E-05	-	3.8E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.0E+03	#NAME?	1.0E+03	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.1-1  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.72E+01</b>	-	<b>4.72E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>6.96E+00</b>	-	<b>6.96E+00</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>2.127E+03</b>	<b>#NAME?</b>	<b>1.72E+03</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	6.47E-06	<b>#NAME?</b>	6.45E-06	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	1.74E+00	<b>#NAME?</b>	1.74E+00	<b>#NAME?</b>		

**Table F.1-2  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.1E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	3.418E-01	#NAME?	3.4E-01	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	6.4E-02	#NAME?	6.3E-02	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	19.84		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	6676					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm2/s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-2  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		





**Table F.1-2  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.1E-05	#NAME?	5.1E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	3.4E-01	#NAME?	3.4E-01	#NAME?	WARNING	Please review warning messages
	(ppbv)		6.4E-02	#NAME?	6.3E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	1.1E+02	#NAME?	1.1E+02	#NAME?		
	(ppbv)		2.1E+01	#NAME?	2.1E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.4E-03	-	1.4E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.2E-05	-	5.2E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Concentration versus Depth Profile**

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

Please check WARNING or ERROR flags



Table F.1-2  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.30E+02	#NAME?	9.85E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	3.29E-07	#NAME?	3.28E-07	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	3.90E-02	#NAME?	3.89E-02	#NAME?		

**Table F.1-3  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.1E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.723E-01	#NAME?	1.7E-01	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	3.2E-02	#NAME?	3.2E-02	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	10		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	3365					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-3  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.1-3**  
**Johnson and Ettinger Model Input and Output**  
**Future Industrial Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1

**Chemical Name:** Trichloroethylene    **CAS No.:** 79-01-6

**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>			<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>										
<b>Stratum A SCS soil type</b>		SCS_A			Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA			2.44					
Stratum A total porosity	(-)	nSA			0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA			0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA			1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>										
<b>Stratum B SCS soil type</b>		SCS_B			Not Present					
<b>Stratum B thickness</b>	(m)	hSB			0.00					
Stratum B total porosity	(-)	nSB					NA	NA		
Stratum B water-filled porosity	(-)	nwSB					NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB					NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>										
<b>Stratum C SCS soil type</b>		SCS_C			Not Present					
<b>Stratum C thickness</b>	(m)	hSC			0.00					
Stratum C total porosity	(-)	nSC					NA	NA		
Stratum C water-filled porosity	(-)	nwSC					NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC					NA	NA		
<b>Stratum directly above the water table</b>										
Stratum A, B, or C		src_soil			Stratum A					
Height of capillary fringe	(m)	hcz			0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz			0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz			0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>			<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR			1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ			1	1	NA	NA		
Exposure Scenario		Scenario			Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc			70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc			25	25	NA	NA		
Exposure duration	(yrs)	ED			25	25	NA	NA		
Exposure frequency	(days/yr)	EF			250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET			8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF			72	72	NA	NA		MMOAF used in place of ED in risk calculations

Table F.1-3  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.1E-05	#NAME?	5.1E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.7E-01	#NAME?	1.7E-01	#NAME?	WARNING	Please review warning messages
	(ppbv)		3.2E-02	#NAME?	3.2E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	5.7E+01	#NAME?	5.7E+01	#NAME?		
	(ppbv)		1.1E+01	#NAME?	1.1E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.4E-03	-	1.4E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.2E-05	-	5.2E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.1-3  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel B)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.30E+02	#NAME?	9.85E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	1.66E-07	#NAME?	1.65E-07	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	1.97E-02	#NAME?	1.96E-02	#NAME?		

**Table F.1-4  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel C)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.1E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	7.631E-02	#NAME?	7.6E-02	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	1.4E-02	#NAME?	1.4E-02	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	4.43		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	1491					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-4  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel C)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		



**Table F.1-4  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel C)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**

Site Name/Run Number:

Chemical Name: Trichloroethylene CAS No. 79-01-6

Depth below grade to water table: 2.44 meters

Vadose zone characteristics:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
Exposure Parameters:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
Target risk for carcinogens	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-4  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel C)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.1E-05	#NAME?	5.1E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	7.6E-02	#NAME?	7.6E-02	#NAME?	WARNING	Please review warning messages
	(ppbv)		1.4E-02	#NAME?	1.4E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	2.5E+01	#NAME?	2.5E+01	#NAME?		
	(ppbv)		4.7E+00	#NAME?	4.7E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.4E-03	-	1.4E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.2E-05	-	5.2E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.1-4  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel C)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.30E+02	#NAME?	9.85E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	7.35E-08	#NAME?	7.32E-08	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	8.71E-03	#NAME?	8.68E-03	#NAME?		

**Table F.1-5  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.1E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.554E-01	#NAME?	1.5E-01	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	2.9E-02	#NAME?	2.9E-02	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	9.02		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	3035					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-5  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.1-5  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.:** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b><u>Vadose zone characteristics:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b><u>Stratum A (Top of soil profile):</u></b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b><u>Stratum B (Soil layer below Stratum A):</u></b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b><u>Stratum C (Soil layer below Stratum B):</u></b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b><u>Stratum directly above the water table</u></b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b><u>Exposure Parameters:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Target risk for carcinogens	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-5  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.1E-05	#NAME?	5.1E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.6E-01	#NAME?	1.5E-01	#NAME?	WARNING	Please review warning messages
	(ppbv)		2.9E-02	#NAME?	2.9E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	5.2E+01	#NAME?	5.2E+01	#NAME?		
	(ppbv)		9.6E+00	#NAME?	9.6E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.4E-03	-	1.4E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.2E-05	-	5.2E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.1-5  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel D)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene 0

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.30E+02	#NAME?	9.85E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	1.50E-07	#NAME?	1.49E-07	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	1.77E-02	#NAME?	1.77E-02	#NAME?		



**Table F.1-6  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.3E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	4.135E+00	#NAME?	4.1E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	7.7E-01	#NAME?	7.7E-01	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	230.4		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	77527					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.016%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-6  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.1-6**  
**Johnson and Ettinger Model Input and Output**  
**Future Industrial Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 1.83 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	1.83					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-6  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.3E-05	#NAME?	5.3E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	4.1E+00	#NAME?	4.1E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		7.7E-01	#NAME?	7.7E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	1.4E+03	#NAME?	1.4E+03	#NAME?		
	(ppbv)		2.6E+02	#NAME?	2.6E+02	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.4E-05	-	5.4E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)
0.2	~0.5E+04
0.7	~2.5E+04
1.2	~5.0E+04
1.8	~8.0E+04

Please check WARNING or ERROR flags

Table F.1-6  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.20E+02	#NAME?	9.46E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	3.98E-06	#NAME?	3.96E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	4.72E-01	#NAME?	4.70E-01	#NAME?		

**Table F.1-7  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	4.0E-05	#NAME?	0.0000	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	5.928E+00	#NAME?	5.9E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	8.7E-01	#NAME?	8.7E-01	#NAME?

**Model Input**

Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	251.1		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	148305					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.090%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.1-7  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.1-7**  
**Johnson and Ettinger Model Input and Output**  
**Future Industrial Scenario - Tetrachloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene    CAS No. 127-18-4  
 Depth below grade to water table: 1.52 meters

<b>Vadose zone characteristics:</b>			Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>										
<b>Stratum A SCS soil type</b>		SCS_A			Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA			1.52					
Stratum A total porosity	(-)	nSA			0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA			0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA			1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>										
<b>Stratum B SCS soil type</b>		SCS_B			Not Present					
<b>Stratum B thickness</b>	(m)	hSB			0.00					
Stratum B total porosity	(-)	nSB					NA	NA		
Stratum B water-filled porosity	(-)	nwSB					NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB					NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>										
<b>Stratum C SCS soil type</b>		SCS_C			Not Present					
<b>Stratum C thickness</b>	(m)	hSC			0.00					
Stratum C total porosity	(-)	nSC					NA	NA		
Stratum C water-filled porosity	(-)	nwSC					NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC					NA	NA		
<b>Stratum directly above the water table</b>										
Stratum A, B, or C		src_soil			Stratum A					
Height of capillary fringe	(m)	hcz			0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz			0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz			0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>			Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Target risk for carcinogens</b>	(-)	Target_CR			1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ			1	1	NA	NA		
Exposure Scenario		Scenario			Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc			70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc			25	25	NA	NA		
Exposure duration	(yrs)	ED			25	25	NA	NA		
Exposure frequency	(days/yr)	EF			250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET			8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF			72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds



**Table F.1-7  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	4.0E-05	#NAME?	4.0E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	5.9E+00	#NAME?	5.9E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		8.7E-01	#NAME?	8.7E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	2.0E+03	#NAME?	2.0E+03	#NAME?		
	(ppbv)		2.9E+02	#NAME?	2.9E+02	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	6.5E-04	-	6.5E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	4.1E-05	-	4.0E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.0E+03	#NAME?	1.0E+03	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.1-7  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Tetrachloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.72E+01</b>	-	<b>4.72E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>6.96E+00</b>	-	<b>6.96E+00</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>1.998E+03</b>	<b>#NAME?</b>	<b>1.61E+03</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	1.26E-07	<b>#NAME?</b>	1.25E-07	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	3.38E-02	<b>#NAME?</b>	3.37E-02	<b>#NAME?</b>		

**Table F.1-8  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.4E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	4.534E+00	#NAME?	4.5E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	8.4E-01	#NAME?	8.4E-01	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	247.3		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	83214					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.017%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-8  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.1-8  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No. 79-01-6**  
**Depth below grade to water table:** 1.52 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	1.52					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	25	25	NA	NA		
Exposure duration	(yrs)		ED	25	25	NA	NA		
Exposure frequency	(days/yr)		EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)		ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-8  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.4E-05	#NAME?	5.4E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	4.5E+00	#NAME?	4.5E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		8.4E-01	#NAME?	8.4E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	1.5E+03	#NAME?	1.5E+03	#NAME?		
	(ppbv)		2.8E+02	#NAME?	2.8E+02	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.0E-04	-	8.9E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.5E-05	-	5.5E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)
0.0	~1.0E+04
0.7	~3.5E+04
1.2	~6.5E+04
1.5	~8.5E+04

Please check WARNING or ERROR flags

Table F.1-8  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.16E+02	#NAME?	9.26E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	4.37E-06	#NAME?	4.35E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	5.18E-01	#NAME?	5.15E-01	#NAME?		



**Table F.1-9  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Vinyl Chloride (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	8.3E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.532E-02	#NAME?	1.5E-02	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	6.0E-03	#NAME?	6.0E-03	#NAME?

**Model Input**      Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	0.18		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	185					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Vinyl Chloride					
CAS No.		CAS	75-01-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.40E-06	4.40E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	1.00E-01	1.00E-01	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	8.80E+03	8.80E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	2.78E-02	2.78E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	1.14E+00	1.14E+00				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	1.03E+00	1.15E+00				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	1.07E-01	1.07E-01	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.20E-05	1.20E-05	NA	NA		



**Table F.1-9  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Vinyl Chloride (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

Table F.1-9  
Johnson and Ettinger Model Input and Output  
Future Industrial Scenario - Vinyl Chloride (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama

**Model Input**                      Site Name/Run Number: Example, Run 1  
 Chemical Name: Vinyl Chloride    CAS No. 75-01-4  
 Depth below grade to water table: 1.52 meters

Vadose zone characteristics:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	1.52					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
Exposure Parameters:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
Target risk for carcinogens	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-9**  
**Johnson and Ettinger Model Input and Output**  
**Future Industrial Scenario - Vinyl Chloride (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Vinyl Chloride CAS No. 75-01-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	8.3E-05	#NAME?	8.3E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.5E-02	#NAME?	1.5E-02	#NAME?	WARNING	Please review warning messages
	(ppbv)		6.0E-03	#NAME?	6.0E-03	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	5.1E+00	#NAME?	5.1E+00	#NAME?		
	(ppbv)		2.0E+00	#NAME?	2.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	1.5E-02	-	1.5E-02	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	2.1E-04	-	2.1E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.4E-03	-	1.4E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	8.5E-05	-	8.5E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	4.9E+02	#NAME?	4.9E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.1-9  
 Johnson and Ettinger Model Input and Output  
 Future Industrial Scenario - Vinyl Chloride (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Vinyl Chloride  
0

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Vinyl Chloride    CAS No. 75-01-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.10E-01</b>	-	<b>2.10E-01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>8.22E-02</b>	-	<b>8.22E-02</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>2.47E+00</b>	<b>#NAME?</b>	<b>2.21E+00</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	7.29E-08	<b>#NAME?</b>	7.29E-08	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	3.50E-05	<b>#NAME?</b>	3.50E-05	<b>#NAME?</b>		

**Table F.1-10**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.5E-04	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.209E+03	#NAME?	1.2E+03	#NAME?
	(ppbv)	1.8E+02	#NAME?	1.8E+02	#NAME?

**Model Input**

Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	13751		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	8121660					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	4.921%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.1-10**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.1-10**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Tetrachloroethylene    **CAS No.** 127-18-4  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds

**Table F.1-10  
Johnson and Ettinger Model Input and Output  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.5E-04	#NAME?	1.5E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.2E+03	#NAME?	1.2E+03	#NAME?		
	(ppbv)		1.8E+02	#NAME?	1.8E+02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	4.0E+05	#NAME?	4.0E+05	#NAME?		
	(ppbv)		5.9E+04	#NAME?	5.9E+04	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.6E-04	-	1.6E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**



Table F.1-10  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.08E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>1.59E+00</b>	-	<b>1.59E+00</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>1.23E+02</b>	<b>#NAME?</b>	<b>9.92E+01</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	1.12E-04	<b>#NAME?</b>	1.12E-04	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	2.90E+01	<b>#NAME?</b>	2.89E+01	<b>#NAME?</b>		

**Table F.1-11**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.337E+00	#NAME?	1.3E+00	#NAME?
	(ppbv)	2.5E-01	#NAME?	2.5E-01	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	19.84		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	6676					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-11**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.1-11**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.3E+00	#NAME?	1.3E+00	#NAME?		
	(ppbv)		2.5E-01	#NAME?	2.5E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	4.5E+02	#NAME?	4.4E+02	#NAME?		
	(ppbv)		8.3E+01	#NAME?	8.3E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)	Type
0.0	1.0E+03	Calculated
0.5	2.0E+03	Calculated
1.0	3.0E+03	Calculated
1.5	4.5E+03	Calculated
2.0	6.0E+03	Calculated
2.5	7.0E+03	Calculated

Table F.1-11  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	5.41E-06	#NAME?	5.38E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	6.41E-01	#NAME?	6.38E-01	#NAME?		

**Table F.1-12**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	6.737E-01	#NAME?	6.7E-01	#NAME?
	(ppbv)	1.3E-01	#NAME?	1.2E-01	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	10		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	3365					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm2/s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-12**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		





**Table F.1-12**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	6.7E-01	#NAME?	6.7E-01	#NAME?		
	(ppbv)		1.3E-01	#NAME?	1.2E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	2.2E+02	#NAME?	2.2E+02	#NAME?		
	(ppbv)		4.2E+01	#NAME?	4.2E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.1-12  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel B)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	2.72E-06	#NAME?	2.71E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	3.23E-01	#NAME?	3.22E-01	#NAME?		

**Table F.1-13**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel C)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	2.985E-01	#NAME?	3.0E-01	#NAME?
	(ppbv)	5.6E-02	#NAME?	5.5E-02	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	4.43		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	1491					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-13  
Johnson and Ettinger Model Input and Output  
Future Residential Scenario - Trichloroethene (Parcel C)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.1-13**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel C)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	3.0E-01	#NAME?	3.0E-01	#NAME?		
	(ppbv)		5.6E-02	#NAME?	5.5E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	9.9E+01	#NAME?	9.9E+01	#NAME?		
	(ppbv)		1.9E+01	#NAME?	1.8E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.1-13  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel C)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b><u>Risk-Based Target Screening Levels</u></b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b><u>Incremental Risk Estimates</u></b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	1.21E-06	#NAME?	1.20E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	1.43E-01	#NAME?	1.43E-01	#NAME?		



**Table F.1-14**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel D)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	6.077E-01	#NAME?	6.1E-01	#NAME?
	(ppbv)	1.1E-01	#NAME?	1.1E-01	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	9.02		NA			
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	3035					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.001%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm2/s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-14**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel D)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.1-14**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel D)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	6.1E-01	#NAME?	6.1E-01	#NAME?		
	(ppbv)		1.1E-01	#NAME?	1.1E-01	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	2.0E+02	#NAME?	2.0E+02	#NAME?		
	(ppbv)		3.8E+01	#NAME?	3.8E+01	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)
0.2	~200
0.7	~800
1.1	~1400
1.6	~2100
2.4	~3100

Table F.1-14  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel D)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	2.46E-06	#NAME?	2.45E-06	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	2.91E-01	#NAME?	2.90E-01	#NAME?		

**Table F.1-15**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.613E+01	#NAME?	1.6E+01	#NAME?
	(ppbv)	3.0E+00	#NAME?	3.0E+00	#NAME?

**Model Input**      Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	230.4		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	77527					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.016%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.1-15**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		





**Table F.1-15**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.6E+01	#NAME?	1.6E+01	#NAME?		
	(ppbv)		3.0E+00	#NAME?	3.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	5.4E+03	#NAME?	5.4E+03	#NAME?		
	(ppbv)		1.0E+03	#NAME?	1.0E+03	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.2E-04	-	2.2E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)	Type
0.1	~1.0E+04	Calculated
0.6	~3.0E+04	Calculated
1.1	~5.0E+04	Calculated
1.8	~8.0E+04	Calculated

Table F.1-15  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
 0.000001

Model Output Site Name/Run Number:   
 Chemical Name: Trichloroethylene CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b> Scenario: Residential								
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
Target indoor air concentration	(ug/m3)	Target_IA	4.78E-01	-	4.78E-01	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	6.83E+00	#NAME?	5.65E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	6.52E-05	#NAME?	6.50E-05	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	7.73E+00	#NAME?	7.70E+00	#NAME?		

**Table F.1-16**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.6E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	2.343E+01	#NAME?	2.3E+01	#NAME?
	(ppbv)	3.5E+00	#NAME?	3.4E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	251.1		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	148305					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.090%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.1-16**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.1-16**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Tetrachloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.6E-04	#NAME?	1.6E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	2.3E+01	#NAME?	2.3E+01	#NAME?		
	(ppbv)		3.5E+00	#NAME?	3.4E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	7.8E+03	#NAME?	7.8E+03	#NAME?		
	(ppbv)		1.2E+03	#NAME?	1.1E+03	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	7.0E-04	-	7.0E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.7E-04	-	1.7E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)	Type
0.1	1.0E+05	Calculated
0.6	6.0E+04	Calculated
1.1	1.1E+05	Calculated
1.5	1.5E+05	Calculated

Table F.1-16  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Tetrachloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.08E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>1.59E+00</b>	-	<b>1.59E+00</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>1.16E+02</b>	<b>#NAME?</b>	<b>9.35E+01</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	2.17E-06	<b>#NAME?</b>	2.16E-06	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	5.62E-01	<b>#NAME?</b>	5.60E-01	<b>#NAME?</b>		

**Table F.1-17**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	1.767E+01	#NAME?	1.8E+01	#NAME?
	(ppbv)	3.3E+00	#NAME?	3.3E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	247.3		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	83214					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.017%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.1-17**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.1-17**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	1.8E+01	#NAME?	1.8E+01	#NAME?		
	(ppbv)		3.3E+00	#NAME?	3.3E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	5.9E+03	#NAME?	5.9E+03	#NAME?		
	(ppbv)		1.1E+03	#NAME?	1.1E+03	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.6E-04	-	9.5E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.3E-04	-	2.3E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)
0.1	~1.0E+04
0.6	~3.5E+04
1.1	~6.5E+04
1.5	~8.5E+04

Table F.1-17  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	6.70E+00	#NAME?	5.54E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	7.15E-05	#NAME?	7.12E-05	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	8.47E+00	#NAME?	8.44E+00	#NAME?		

**Table F.1-18**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Vinyl Chloride (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	3.1E-04	#NAME?	0.0003	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	5.810E-02	#NAME?	5.8E-02	#NAME?
	(ppbv)	2.3E-02	#NAME?	2.3E-02	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium	0.18		NA			
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	185					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Vinyl Chloride					
CAS No.		CAS	75-01-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.40E-06	4.40E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	1.00E-01	1.00E-01	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	8.80E+03	8.80E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	2.78E-02	2.78E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	1.14E+00	1.14E+00				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	1.03E+00	1.15E+00				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	1.07E-01	1.07E-01	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.20E-05	1.20E-05	NA	NA		

**Table F.1-18**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Vinyl Chloride (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

Table F.1-18  
Johnson and Ettinger Model Input and Output  
Future Residential Scenario - Vinyl Chloride (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama

**Model Input**      Site Name/Run Number:   
Chemical Name: Vinyl Chloride    CAS No. 75-01-4  
Depth below grade to water table: 1.52 meters

Vadose zone characteristics:								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	1.52					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
Exposure Parameters:								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
Target risk for carcinogens	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.1-18**  
**Johnson and Ettinger Model Input and Output**  
**Future Residential Scenario - Vinyl Chloride (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Vinyl Chloride CAS No. 75-01-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	3.1E-04	#NAME?	3.1E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	5.8E-02	#NAME?	5.8E-02	#NAME?		
	(ppbv)		2.3E-02	#NAME?	2.3E-02	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	1.9E+01	#NAME?	1.9E+01	#NAME?		
	(ppbv)		7.6E+00	#NAME?	7.6E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	1.5E-02	-	1.5E-02	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	2.1E-04	-	2.1E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	3.5E-04	-	3.5E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	6.0E+01	#NAME?	6.0E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil and advection through foundation both control intrusion.

**Critical Parameters**

Hb, Ls, DeffT, ach, Qsoil\_Qb

**Non-Critical Parameters**

Lf, DeffA, eta

**Concentration versus Depth Profile**

Depth (meter)	Soil Gas Concentration (ug/m3)	Type
0.1	~2.5	Calculated
0.6	~8.0	Calculated
1.1	~1.4	Calculated
1.5	~1.9	Calculated



Table F.1-18  
 Johnson and Ettinger Model Input and Output  
 Future Residential Scenario - Vinyl Chloride (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Vinyl Chloride  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Vinyl Chloride    CAS No. 75-01-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.68E-01</b>	-	<b>1.68E-01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	<b>(ppbv)</b>		<b>6.56E-02</b>	-	<b>6.56E-02</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>5.19E-01</b>	<b>#NAME?</b>	<b>4.64E-01</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	3.47E-07	<b>#NAME?</b>	3.46E-07	<b>#NAME?</b>		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	5.57E-04	<b>#NAME?</b>	5.57E-04	<b>#NAME?</b>		

**APPENDIX F.2**  
**JOHNSON AND ETTINGER MODELING OUTPUT**  
**FOR SSSLs BASED ON RISK OF  $10^{-6}$**

**Table F.2-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	3.8E-05	#NAME?	0.0000	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.2-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

Table F.2-1  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Industrial Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Tetrachloroethylene    **CAS No.** 127-18-4  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds

**Table F.2-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	3.8E-05	#NAME?	3.7E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.0E-03	-	1.0E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	3.8E-05	-	3.8E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.0E+03	#NAME?	1.0E+03	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.2-1  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Industrial Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.72E+01</b>	-	<b>4.72E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	(ppbv)		6.96E+00	-	6.96E+00	-		
Target groundwater concentration	(ug/L)	Target_GW	2.127E+03	#NAME?	1.72E+03	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.3E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.2-2**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Industrial Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

Table F.2-2  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 1.83 meters

<b>Vadose zone characteristics:</b>			<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>										
<b>Stratum A SCS soil type</b>		SCS_A			Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA			1.83					
Stratum A total porosity	(-)	nSA			0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA			0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA			1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>										
<b>Stratum B SCS soil type</b>		SCS_B			Not Present					
<b>Stratum B thickness</b>	(m)	hSB			0.00					
Stratum B total porosity	(-)	nSB					NA	NA		
Stratum B water-filled porosity	(-)	nwSB					NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB					NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>										
<b>Stratum C SCS soil type</b>		SCS_C			Not Present					
<b>Stratum C thickness</b>	(m)	hSC			0.00					
Stratum C total porosity	(-)	nSC					NA	NA		
Stratum C water-filled porosity	(-)	nwSC					NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC					NA	NA		
<b>Stratum directly above the water table</b>										
Stratum A, B, or C		src_soil			Stratum A					
Height of capillary fringe	(m)	hcz			0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz			0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz			0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>			<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR			1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ			1	1	NA	NA		
Exposure Scenario		Scenario			Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc			70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc			25	25	NA	NA		
Exposure duration	(yrs)	ED			25	25	NA	NA		
Exposure frequency	(days/yr)	EF			250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET			8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF			72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.2-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.3E-05	#NAME?	5.3E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.4E-05	-	5.4E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.2-2  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.20E+02	#NAME?	9.46E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.4E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.2-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

**Table F.2-3  
Johnson and Ettinger Model Input and Output (For Deriving SSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**                                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 1.52 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	1.52					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	25	25	NA	NA		
Exposure duration	(yrs)		ED	25	25	NA	NA		
Exposure frequency	(days/yr)		EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)		ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations



**Table F.2-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.4E-05	#NAME?	5.4E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.0E-04	-	8.9E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.5E-05	-	5.5E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.2-3  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Industrial Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+00</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E-01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.16E+02	#NAME?	9.26E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.5E-04	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.2-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.2-4**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Tetrachloroethylene    **CAS No.** 127-18-4  
**Depth below grade to water table:** 2.44 meters

<b><u>Vadose zone characteristics:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b><u>Stratum A (Top of soil profile):</u></b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b><u>Stratum B (Soil layer below Stratum A):</u></b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b><u>Stratum C (Soil layer below Stratum B):</u></b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b><u>Stratum directly above the water table</u></b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b><u>Exposure Parameters:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds

**Table F.2-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.5E-04	#NAME?	1.5E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.6E-04	-	1.6E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-4  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.08E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on cancer risk (unit risk factor)
	(ppbv)		1.59E+00	-	1.59E+00	-		
Target groundwater concentration	(ug/L)	Target_GW	1.23E+02	#NAME?	9.92E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.2-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		





**Table F.2-5**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-5  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-02</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.2-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.2-6**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input** Site Name/Run Number: Example, Run 1  
**Chemical Name:** Trichloroethylene **CAS No.** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b><u>Vadose zone characteristics:</u></b>		Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b><u>Stratum A (Top of soil profile):</u></b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b><u>Stratum B (Soil layer below Stratum A):</u></b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b><u>Stratum C (Soil layer below Stratum B):</u></b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b><u>Stratum directly above the water table</u></b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b><u>Exposure Parameters:</u></b>		Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.2-6**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**



Table F.2-6  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel B)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b><u>Risk-Based Target Screening Levels</u></b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b><u>Incremental Risk Estimates</u></b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.2-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input**      Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.2-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.2-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**

Site Name/Run Number: Example, Run 1

Chemical Name: Trichloroethylene CAS No. 79-01-6

Depth below grade to water table: 2.44 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.2-7**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel D)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-7  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel D)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.2-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.2-8**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10<sup>-6</sup>)**  
**Future Residential Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**

Site Name/Run Number: Example, Run 1

Chemical Name: Trichloroethylene CAS No. 79-01-6

Depth below grade to water table: 1.83 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
Stratum A SCS soil type			SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)		hSA	1.83					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
Stratum B SCS soil type			SCS_B	Not Present					
Stratum B thickness	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
Stratum C SCS soil type			SCS_C	Not Present					
Stratum C thickness	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Target risk for carcinogens	(-)		Target_CR	1.00E-06	1.00E-06	NA	NA		
Target hazard quotient for non-carcinogens	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations



**Table F.2-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.2E-04	-	2.2E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-8  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	6.83E+00	#NAME?	5.65E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.6E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.2-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.2-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.6E-04	#NAME?	1.6E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	7.0E-04	-	7.0E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.7E-04	-	1.7E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-9  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Tetrachloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene    CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.08E+01</b>	-	<b>1.08E+01</b>	-		<b>Target indoor air concentration based on cancer risk (unit risk factor)</b>
	<b>(ppbv)</b>		<b>1.59E+00</b>	-	<b>1.59E+00</b>	-		
<b>Target groundwater concentration</b>	<b>(ug/L)</b>	<b>Target_GW</b>	<b>1.16E+02</b>	<b>#NAME?</b>	<b>9.35E+01</b>	<b>#NAME?</b>		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.2-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



Table F.2-10  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.2-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.6E-04	-	9.5E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.3E-04	-	2.3E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Table F.2-10  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b><u>Risk-Based Target Screening Levels</u></b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	6.70E+00	#NAME?	5.54E+00	#NAME?		
<b><u>Incremental Risk Estimates</u></b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.2-11  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
Future Residential Scenario - Trichloroethene (Parcel H)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

Table F.2-11  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel H)  
 Alabama Army National Guard  
 Mobile, Alabama

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.2-11**  
**Johnson and Ettinger Model Input and Output (For Deriving SSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel H)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b><u>Vadose zone characteristics:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b><u>Stratum A (Top of soil profile):</u></b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b><u>Stratum B (Soil layer below Stratum A):</u></b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b><u>Stratum C (Soil layer below Stratum B):</u></b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b><u>Stratum directly above the water table</u></b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b><u>Exposure Parameters:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-06	1.00E-06	NA	NA		
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.2-11**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)**  
**Future Residential Scenario - Trichloroethene (Parcel H)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?		
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**



Table F.2-11  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-6)  
 Future Residential Scenario - Trichloroethene (Parcel H)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E-01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-02	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+00	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**APPENDIX F.3**  
**JOHNSON AND ETINGER MODELING OUTPUT**  
**FOR SSSLs BASED ON RISK OF  $10^{-5}$**

**Table F.3-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	3.8E-05	#NAME?	0.0000	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.3-1**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Industrial Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

Table F.3-1  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Industrial Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Tetrachloroethylene    **CAS No.** 127-18-4  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds

**Table F.3-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	3.8E-05	#NAME?	3.7E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.0E-03	-	1.0E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	3.8E-05	-	3.8E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.0E+03	#NAME?	1.0E+03	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-1  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Industrial Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.75E+02</b>	-	<b>4.72E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	<b>(ppbv)</b>		<b>2.58E+01</b>	-	<b>6.96E+00</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.898E+03	#NAME?	1.72E+03	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.3E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.3-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		

Table F.3-2  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

**Model Input**                      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6  
 Depth below grade to water table: 1.83 meters

Vadose zone characteristics:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	1.83					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
Exposure Parameters:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
Target risk for carcinogens	(-)	Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Commercial	Commercial				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	25	25	NA	NA		
Exposure duration	(yrs)	ED	25	25	NA	NA		
Exposure frequency	(days/yr)	EF	250	250	NA	NA		
Exposure time	(hrs/24 hrs)	ET	8	8	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.3-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.3E-05	#NAME?	5.3E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.4E-05	-	5.4E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-2  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+01</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		7.36E+00	-	3.82E-01	-		
Target groundwater concentration	(ug/L)	Target_GW	2.20E+03	#NAME?	9.46E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.4E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		





**Table F.3-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.4E-05	#NAME?	5.4E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.0E-04	-	8.9E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.5E-05	-	5.5E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.3-3  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Industrial Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
Target indoor air concentration	(ug/m3)	Target_IA	3.96E+01	-	2.05E+00	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		7.36E+00	-	3.82E-01	-		
Target groundwater concentration	(ug/L)	Target_GW	2.16E+03	#NAME?	9.26E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.5E-04	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.3-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.3-4**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Tetrachloroethylene    **CAS No.** 127-18-4  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	5.00E-06	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	0.5	1	NA	NA	WARNING	Value is different from default value; please justify.
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA	NOTE	MMOAF not relevant for non-mutagenic compounds

**Table F.3-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.5E-04	#NAME?	1.5E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.6E-04	-	1.6E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-4  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.09E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	(ppbv)		3.08E+00	-	1.59E+00	-		
Target groundwater concentration	(ug/L)	Target_GW	2.37E+02	#NAME?	9.92E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.3-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	5.00E-06	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	0.5	1	NA	NA	WARNING	Value is different from default value; please justify.
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

Table F.3-5  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-5  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.39E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>4.45E-01</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	3.55E+01	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input**      Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-6**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.3-6**  
**Johnson and Ettinger Model Input and Output (For Deriving SSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input** Site Name/Run Number: Example, Run 1

Chemical Name: Trichloroethylene CAS No. 79-01-6

Depth below grade to water table: 2.44 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
Stratum A SCS soil type			SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
Stratum B SCS soil type			SCS_B	Not Present					
Stratum B thickness	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
Stratum C SCS soil type			SCS_C	Not Present					
Stratum C thickness	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Target risk for carcinogens	(-)		Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
Target hazard quotient for non-carcinogens	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.3-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.3-6  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel B)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-01	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+01	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.3-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.3-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.3-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-7  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel D)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-01</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+01	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.3-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**

Site Name/Run Number: Example, Run 1

Chemical Name: Trichloroethene CAS No. 79-01-6

Depth below grade to water table: 1.83 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	1.83					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations



**Table F.3-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.2E-04	-	2.2E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-8  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E-01	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	6.83E+01	#NAME?	5.65E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.6E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.3-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.3-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.6E-04	#NAME?	1.6E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	7.0E-04	-	7.0E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.7E-04	-	1.7E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-9  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Tetrachloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.09E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	<b>(ppbv)</b>		<b>3.08E+00</b>	-	<b>1.59E+00</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.23E+02	#NAME?	9.35E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.3-10  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.3-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.3-10  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Input**      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 1.52 meters

<b><u>Vadose zone characteristics:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b><u>Stratum A (Top of soil profile):</u></b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	1.52					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b><u>Stratum B (Soil layer below Stratum A):</u></b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b><u>Stratum C (Soil layer below Stratum B):</u></b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b><u>Stratum directly above the water table</u></b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b><u>Exposure Parameters:</u></b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	5.00E-06	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	0.5	1	NA	NA	WARNING	Value is different from default value; please justify.
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.3-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.6E-04	-	9.5E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.3E-04	-	2.3E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.3-10  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-06	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.39E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		4.45E-01	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	3.35E+01	#NAME?	5.54E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.3-11  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel H)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.3-11  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
Future Residential Scenario - Trichloroethene (Parcel H)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

Table F.3-11  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel H)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.:** 79-01-6  
**Depth below grade to water table:** 2.44 meters

<b>Vadose zone characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>								
<b>Stratum A SCS soil type</b>		SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
<b>Stratum B SCS soil type</b>		SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
<b>Stratum C SCS soil type</b>		SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)	Target_CR	1.00E-05	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations



**Table F.3-11**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)**  
**Future Residential Scenario - Trichloroethene (Parcel H)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.3-11  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-5)  
 Future Residential Scenario - Trichloroethene (Parcel H)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+00</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E-01</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+01	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**APPENDIX F.4**  
**JOHNSON AND ETTINGER MODELING OUTPUT**  
**FOR SSSLs BASED ON RISK OF  $10^{-4}$**

**Table F.4-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	3.8E-05	#NAME?	0.0000	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.4-1  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		



**Table F.4-1**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Industrial Scenario - Tetrachloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	3.8E-05	#NAME?	3.7E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.0E-03	-	1.0E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	3.8E-05	-	3.8E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.0E+03	#NAME?	1.0E+03	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-1  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Industrial Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>1.75E+02</b>	-	<b>4.72E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	<b>(ppbv)</b>		<b>2.58E+01</b>	-	<b>6.96E+00</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.898E+03	#NAME?	1.72E+03	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.3E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm2/s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.4-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		



**Table F.4-2  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.3E-05	#NAME?	5.3E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.4E-05	-	5.4E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-2  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Industrial Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+02</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E+01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.20E+04	#NAME?	9.46E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	5.4E-05	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Commercial	Commercial				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.20	0.20	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.20	0.20	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	1500.00	1500.00	80-1000	NA	WARNING	Value is outside of reasonable range (80 - 200 m2).
Enclosed space mixing height	(m)	Hb	3.00	3.00	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	1.50	1.50	.3-4.1	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	6750.00	6750.00	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	20.25	20.25	NA	NA		





**Table F.4-3  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Industrial Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	5.4E-05	#NAME?	5.4E-05	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.0E-04	-	8.9E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	5.5E-05	-	5.5E-05		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	7.7E+02	#NAME?	7.7E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Concentration versus Depth Profile**

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

Please check WARNING or ERROR flags



Table F.4-3  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Industrial Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethene  
0

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Commercial</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>3.96E+02</b>	-	<b>2.05E+00</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>7.36E+01</b>	-	<b>3.82E-01</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	2.16E+04	#NAME?	9.26E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.5E-04	#NAME?	0.0001	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.4-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.4-4  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.5E-04	#NAME?	1.5E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.6E-04	-	1.6E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-4  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Tetrachloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.09E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	(ppbv)		3.08E+00	-	1.59E+00	-		
Target groundwater concentration	(ug/L)	Target_GW	2.37E+02	#NAME?	9.92E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-5**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel A)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		





**Table F.4-5  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel A)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-5  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel A)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.39E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		4.45E+00	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	3.55E+02	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-6**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

Table F.4-6  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel B)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**                      **Site Name/Run Number:** Example, Run 1  
**Chemical Name:** Trichloroethylene    **CAS No.** 79-01-6  
**Depth below grade to water table:** 2.44 meters

Vadose zone characteristics:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Stratum A (Top of soil profile):</b>								
Stratum A SCS soil type		SCS_A	Loamy Sand					
Stratum A thickness (from surface)	(m)	hSA	2.44					
Stratum A total porosity	(-)	nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)	nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )	rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>								
Stratum B SCS soil type		SCS_B	Not Present					
Stratum B thickness	(m)	hSB	0.00					
Stratum B total porosity	(-)	nSB			NA	NA		
Stratum B water-filled porosity	(-)	nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )	rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>								
Stratum C SCS soil type		SCS_C	Not Present					
Stratum C thickness	(m)	hSC	0.00					
Stratum C total porosity	(-)	nSC			NA	NA		
Stratum C water-filled porosity	(-)	nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )	rhoSC			NA	NA		
<b>Stratum directly above the water table</b>								
Stratum A, B, or C		src_soil	Stratum A					
Height of capillary fringe	(m)	hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)	ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)	nwcz	0.303	0.303	NA	0.22		
Exposure Parameters:	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
Target risk for carcinogens	(-)	Target_CR	1.00E-04	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
Target hazard quotient for non-carcinogens	(-)	Target_HQ	1	1	NA	NA		
Exposure Scenario		Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)	ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)	ATnc	26	26	NA	NA		
Exposure duration	(yrs)	ED	26	26	NA	NA		
Exposure frequency	(days/yr)	EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)	ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)	MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.4-6  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel B)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.4-6  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel B)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E+00</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+02	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.4-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm2/s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		

**Table F.4-7**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel D)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Input**

Site Name/Run Number: Example, Run 1

Chemical Name: Trichloroethylene CAS No. 79-01-6

Depth below grade to water table: 2.44 meters

<b>Vadose zone characteristics:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Stratum A (Top of soil profile):</b>									
<b>Stratum A SCS soil type</b>			SCS_A	Loamy Sand					
<b>Stratum A thickness (from surface)</b>	(m)		hSA	2.44					
Stratum A total porosity	(-)		nSA	0.390	0.390	NA	0.20		
Stratum A water-filled porosity	(-)		nwSA	0.076	0.076	0.049 - 0.1	0.25		
Stratum A bulk density	(g/cm <sup>3</sup> )		rhoSA	1.620	1.620	NA	0.05		
<b>Stratum B (Soil layer below Stratum A):</b>									
<b>Stratum B SCS soil type</b>			SCS_B	Not Present					
<b>Stratum B thickness</b>	(m)		hSB	0.00					
Stratum B total porosity	(-)		nSB			NA	NA		
Stratum B water-filled porosity	(-)		nwSB			NA	NA		
Stratum B bulk density	(g/cm <sup>3</sup> )		rhoSB			NA	NA		
<b>Stratum C (Soil layer below Stratum B):</b>									
<b>Stratum C SCS soil type</b>			SCS_C	Not Present					
<b>Stratum C thickness</b>	(m)		hSC	0.00					
Stratum C total porosity	(-)		nSC			NA	NA		
Stratum C water-filled porosity	(-)		nwSC			NA	NA		
Stratum C bulk density	(g/cm <sup>3</sup> )		rhoSC			NA	NA		
<b>Stratum directly above the water table</b>									
Stratum A, B, or C			src_soil	Stratum A					
Height of capillary fringe	(m)		hcz	0.188	0.188	NA	NA		
Capillary zone total porosity	(-)		ncz	0.390	0.390	NA	0.20		
Capillary zone water filled porosity	(-)		nwcz	0.303	0.303	NA	0.22		
<b>Exposure Parameters:</b>		<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Target risk for carcinogens</b>	(-)		Target_CR	1.00E-04	1.00E-06	NA	NA	WARNING	Value is different from default value; please justify.
<b>Target hazard quotient for non-carcinogens</b>	(-)		Target_HQ	1	1	NA	NA		
Exposure Scenario			Scenario	Residential	Residential				
Averaging time for carcinogens	(yrs)		ATc	70	70	NA	NA		
Averaging time for non-carcinogens	(yrs)		ATnc	26	26	NA	NA		
Exposure duration	(yrs)		ED	26	26	NA	NA		
Exposure frequency	(days/yr)		EF	350	350	NA	NA		
Exposure time	(hrs/24 hrs)		ET	24	24	NA	NA		
Mutagenic mode-of-action factor	(yrs)		MMOAF	72	72	NA	NA		MMOAF used in place of ED in risk calculations

**Table F.4-7  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel D)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Concentration versus Depth Profile**

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

Please check WARNING or ERROR flags

Table F.4-7  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel D)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E+00	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+02	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.83		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-8**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel E)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		







**Table F.4-8  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel E)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.1E-03	-	1.1E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.2E-04	-	2.2E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-8  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel E)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

**Model Output**      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		8.91E+00	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	6.83E+02	#NAME?	5.65E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	1.6E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

*Note:*  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Tetrachloroethylene					
CAS No.		CAS	127-18-4					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	2.60E-07	2.60E-07	NA	NA		
Mutagenic compound		Mut	No	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	4.00E-02	4.00E-02	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	2.06E+02	2.06E+02	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	1.77E-02	1.77E-02	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	7.24E-01	7.24E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	5.91E-01	7.34E-01				
Diffusivity in air	(cm2/s)	Dair	5.05E-02	5.05E-02	NA	NA		
Diffusivity in water	(cm2/s)	Dwater	9.46E-06	9.46E-06	NA	NA		

**Table F.4-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions <input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.4-9  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Tetrachloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Tetrachloroethylene CAS No. 127-18-4

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	1.6E-04	#NAME?	1.6E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	7.0E-03	-	7.0E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.0E-04	-	1.0E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	7.0E-04	-	7.0E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	1.7E-04	-	1.7E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	1.3E+02	#NAME?	1.3E+02	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-9  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Tetrachloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Tetrachloroethylene  
0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Tetrachloroethylene      CAS No. 127-18-4

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.09E+01</b>	-	<b>1.08E+01</b>	-		Target indoor air concentration based on non-cancer toxicity (reference concentration)
	(ppbv)		3.08E+00	-	1.59E+00	-		
Target groundwater concentration	(ug/L)	Target_GW	2.23E+02	#NAME?	9.35E+01	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		



**Table F.4-10  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel F)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.1E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	1.52		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm-m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		



**Table F.4-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		



**Table F.4-10**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel F)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.1E-04	#NAME?	2.1E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	9.6E-04	-	9.5E-04	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.3E-04	-	2.3E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags

Table F.4-10  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel F)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output      Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene    CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	5E-05	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	0.5	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>2.39E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	(ppbv)		4.45E+00	-	8.91E-02	-		
Target groundwater concentration	(ug/L)	Target_GW	3.35E+02	#NAME?	5.54E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**Table F.4-11  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel H)  
Alabama Army National Guard  
Mobile, Alabama**

<b>Preview</b>	<b>Unit</b>	<b>Value</b>	<b>Range</b>	<b>Default</b>	<b>Default Range</b>
Groundwater to indoor air attenuation coefficient	(-)	2.0E-04	#NAME?	0.0002	#NAME?
Predicted indoor air concentration due to vapor intrusion	(ug/m3)	0.000E+00	#NAME?	0.0E+00	#NAME?
<b>Please check WARNING or ERROR flags</b>	(ppbv)	0.0E+00	#NAME?	0.0E+00	#NAME?

**Model Input** Site Name/Run Number:

Note:  
 -Yellow highlighted cells indicate parameters that typically are changed or must be inputted by the user.  
 -Dotted outline cells indicate default values that may be changed with justification.  
 -Toxicity values are taken from Regional Screening Level tables. These tables are updated semi-annually and may not reflect the most current toxicity information.

[Use English / Metric Converter](#)

<b>Source Characteristics:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Source medium</b>		Source	Groundwater					
<b>Groundwater concentration</b>	(ug/L)	Cmedium			NA			Please enter a value for Cmedium
<b>Depth below grade to water table</b>	(m)	Ls	2.44		Vary - 50	NA		
<b>Average groundwater temperature</b>	(°C)	Ts	21	25	3 - 25			
Calc: Source vapor concentration	(ug/m3)	Cs	0					
Calc: % of pure component saturated vapor concentration	(%)	%Sat	0.000%					

<b>Chemical:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
<b>Chemical Name</b>		Chem	Trichloroethylene					
CAS No.		CAS	79-01-6					
<b>Toxicity Factors</b>								
Unit risk factor	(ug/m <sup>3</sup> ) <sup>-1</sup>	IUR	4.10E-06	4.10E-06	NA	NA		
Mutagenic compound		Mut	Yes	NA	NA	NA		
Reference concentration	(mg/m <sup>3</sup> )	RfC	2.00E-03	2.00E-03	NA	NA		

<b>Chemical Properties:</b>	<b>Units</b>	<b>Symbol</b>	<b>Value</b>	<b>Default</b>	<b>Potential Span</b>	<b>CV</b>	<b>Flag</b>	<b>Comment</b>
Pure component water solubility	(mg/L)	S	1.28E+03	1.28E+03	NA	NA		
Henry's Law Constant @ 25°C	(atm·m <sup>3</sup> /mol)	Hc	9.85E-03	9.85E-03	NA	NA		
Calc: Henry's Law Constant @ 25°C	(dimensionless)	Hr	4.03E-01	4.03E-01				
Calc: Henry's Law Constant @ system temperature	(dimensionless)	Hs	3.36E-01	4.08E-01				
Diffusivity in air	(cm <sup>2</sup> /s)	Dair	6.87E-02	6.87E-02	NA	NA		
Diffusivity in water	(cm <sup>2</sup> /s)	Dwater	1.02E-05	1.02E-05	NA	NA		

**Table F.4-11**  
**Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)**  
**Future Residential Scenario - Trichloroethene (Parcel H)**  
**Alabama Army National Guard**  
**Mobile, Alabama**

<b>Building Characteristics:</b>								
Select Building Assumptions								
<input checked="" type="radio"/> Use ratio for Qsoil/Qbuilding (recommended if no site specific data available) <input type="radio"/> Specify Qsoil and Qbuilding separately; calculate ratio								
	Units	Symbol	Value	Default	Potential Span	CV	Flag	Comment
<b>Building setting</b>		Bldg_Setting	Residential	Residential				
<b>Foundation type</b>		Found_Type	Slab-on-grade	Slab-on-grade				
Depth below grade to base of foundation	(m)	Lb	0.10	0.10	0.1 - 2.44	NA		
Foundation thickness	(m)	Lf	0.10	0.10	0.1 - 0.25	NA		
Fraction of foundation area with cracks	(-)	eta	0.001	0.001	0.00019-0.0019	1.00		
Enclosed space floor area	(m2)	Abf	150.00	150.00	80 - 200	NA		
Enclosed space mixing height	(m)	Hb	2.44	2.44	2.13 - 3.05	NA		
Indoor air exchange rate	(1 / hr)	ach	0.45	0.45	.15-1.26	NA		
Qsoil/Qbuilding	(-)	Qsoil_Qb	0.0030	0.0030	0.0001 - 0.05	1.24		
Calc: Building ventilation rate	(m3/hr)	Qb	164.70	164.70	NA	0.30		
Calc: Average vapor flow rate into building	(m3/hr)	Qsoil	0.49	0.49	NA	NA		





**Table F.4-11  
Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
Future Residential Scenario - Trichloroethene (Parcel H)  
Alabama Army National Guard  
Mobile, Alabama**

**Model Output**

Site Name/Run Number:

Range is based on the reasonable range of Qsoil/Qbuilding values, as reported in the literature.

Chemical Name: Trichloroethylene CAS No. 79-01-6

Source to Indoor Air Attenuation Factor	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Groundwater to indoor air attenuation coefficient	(-)	alpha	2.0E-04	#NAME?	2.0E-04	#NAME?	WARNING	Please review warning messages
Predicted Indoor Air Concentration	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Indoor air concentration due to vapor intrusion	(ug/m3)	Cia	0.0E+00	#NAME?	0.0E+00	#NAME?	WARNING	Please review warning messages
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Predicted Vapor Conc. Beneath Foundation	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Subslab vapor concentration	(ug/m3)	Css	0.0E+00	#NAME?	0.0E+00	#NAME?		
	(ppbv)		0.0E+00	#NAME?	0.0E+00	#NAME?		
Diffusive Transport Upward Through Vadose Zone	Units	Symbol	Value	Range	Default	Default Range	Flag	Comment
Effective diffusion coefficient through Stratum A	(cm2/sec)	DeffA	9.5E-03	-	9.5E-03	-		
Effective diffusion coefficient through Stratum B	(cm2/sec)	DeffB		-		-		
Effective diffusion coefficient through Stratum C	(cm2/sec)	DeffC		-		-		
Effective diffusion coefficient through capillary zone	(cm2/sec)	DeffCZ	1.4E-04	-	1.4E-04	-		
Effective diffusion coefficient through unsaturated zone	(cm2/sec)	DeffT	1.5E-03	-	1.5E-03	-		

Critical Parameters	Symbol	Value	Range	Default	Default Range	Flag
α for diffusive transport from source to building with dirt floor foundation	A_Param	2.1E-04	-	2.1E-04		
Pe (Peclet Number) for transport through the foundation (advection / diffusion)	B_Param	9.3E+01	#NAME?	9.3E+01	#NAME?	
α for convective transport from subslab to building	C_Param	3.0E-03	1.0E-04 - 5.0E-02	3.0E-03	1.0E-04 - 5.0E-02	

**Interpretation**

Advection is the dominant mechanism across the foundation. Diffusion through soil is the overall rate limiting process.

**Critical Parameters**

Hb, Ls, DeffT, ach

**Non-Critical Parameters**

Qsoil\_Qb, Lf, DeffA, eta

**Concentration versus Depth Profile**

Please check WARNING or ERROR flags



Table F.4-11  
 Johnson and Ettinger Model Input and Output (For Deriving SSSLs Based on Risk of 10-4)  
 Future Residential Scenario - Trichloroethene (Parcel H)  
 Alabama Army National Guard  
 Mobile, Alabama

Trichloroethylene  
 0.000001

Model Output Site Name/Run Number: Example, Run 1  
 Chemical Name: Trichloroethylene CAS No. 79-01-6

Risk Calculations	Units	Symbol	Value	Range	Default	Range	Flag	Comment
<b>Risk-Based Target Screening Levels</b>		<b>Scenario: Residential</b>						
Target risk for carcinogens	(-)	Target_CR	1E-04	-	1E-06	-		
Target hazard quotient for noncarcinogens	(-)	Target_HQ	1	-	1	-		
<b>Target indoor air concentration</b>	<b>(ug/m3)</b>	<b>Target_IA</b>	<b>4.78E+01</b>	-	<b>4.78E-01</b>	-		Target indoor air concentration based on both cancer risk and non-cancer toxicity
	<b>(ppbv)</b>		<b>8.91E+00</b>	-	<b>8.91E-02</b>	-		
Target groundwater concentration	(ug/L)	Target_GW	7.10E+02	#NAME?	5.87E+00	#NAME?		
<b>Incremental Risk Estimates</b>								
Incremental cancer risk from vapor intrusion	(-)	Cancer_Risk	0.00E+00	#NAME?	0.00E+00	#NAME?		Note: biodegradation not included in this model, may over estimate indoor air concentrations.
Hazard quotient from vapor intrusion	(-)	HQ	0.00E+00	#NAME?	0.00E+00	#NAME?		

**APPENDIX G**  
**DEVELOPMENT OF SITE-SPECIFIC SCREENING LEVELS**

**APPENDIX G.1**  
**DEVELOPMENT OF SITE-SPECIFIC SCREENING LEVELS**  
**BASED ON RISK OF  $10^{-6}$  AND HQ OF 1**

Table G.1-1  
RSL Calculator - Construction Worker - Soil (SSLs Based on Risk of 10-6 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	Ingestion SF (mg/kg-day) <sup>-1</sup>	SFO Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H' and HLC Ref	Normal Boiling Point T <sub>boil</sub> (K)	BP Ref	Critical Temperature T <sub>crit</sub> (K)	T <sub>crit</sub> Ref	chemtype	D <sub>ia</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	U	2.60E-07	U	1.00E-01	U	4.00E-02	U	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.69E-01	1.77E-02	7.24E-01	U	3.94E+02	U	6.20E+02	U	VOC	5.05E-02

Output generated 25JUL2018:17:02:37

Table G.1-1  
RSL Calculator - Construction Worker - Soil (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

D <sub>w</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=1E-06 (mg/kg)	Dermal SL TR=1E-06 (mg/kg)	Inhalation SL TR=1E-06 (mg/kg)	Carcinogenic SL TR=1E-06 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Dermal SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)
9.46E-06	2.41E-03	1.36E+09	5.09E+02	1.18E+04	-	6.00E+02	5.71E+02	3.39E+04	-	8.55E+01	8.53E+01	8.53E+01 nc

Output generated 25JUL2018:17:02:37

Table G.1-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-6 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific  
Industrial Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	Ingestion SF (mg/kg-day) <sup>-1</sup>	SFO Ref	Inhalation Unit Risk (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H and HLC Ref	Normal Boiling Point T <sub>boil</sub> (K)	BP Ref	Critical Temperature T <sub>crit</sub> (K)	T <sub>crit</sub> Ref	CHEMTYPE	D <sub>ia</sub> (cm <sup>2</sup> /s)	D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06	2.41E-03

Output generated 25JUL2018:16:57:18

Table G.1-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-6 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Indoor Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=1E-06 (mg/kg)	Inhalation SL TR=1E-06 (mg/kg)	Carcinogenic SL TR=1E-06 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)
5.66E+09	2.79E+03	3.11E+03	1.32E+02	1.26E+02	1.40E+04	4.89E+02	4.72E+02	1.26E+02 ca**

Output generated 25JUL2018:16:57:18

Table G.1-3  
RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific  
Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	Ingestion SF (mg/kg-day) <sup>-1</sup>	SFO Ref	Inhalation Unit Risk (µg/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H and HLC Ref	Normal Boiling Point T <sub>boil</sub> (K)	BP Ref	Critical Temperature T <sub>crit</sub> (K)	T <sub>crit</sub> Ref	CHEMTYPE	D <sub>1a</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	U	2.60E-07	U	6.00E-03	U	4.00E-02	U	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.69E-01	1.77E-02	7.24E-01	U	3.94E+02	U	6.20E+02	U	VOC	5.05E-02

Output generated 25JUL2018:16:54:23



Table G.1-3  
RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific  
Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice); c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=1E-06 (mg/kg)	Dermal SL TR=1E-06 (mg/kg)	Inhalation SL TR=1E-06 (mg/kg)	Carcinogenic SL TR=1E-06 (mg/kg)	Ingestion SL Child THQ=1 (mg/kg)	Dermal SL Child THQ=1 (mg/kg)	Inhalation SL Child THQ=1 (mg/kg)	Noncarcinogenic SL Child THI=1 (mg/kg)	Ingestion SL Adult THQ=1 (mg/kg)	Dermal SL Adult THQ=1 (mg/kg)	Inhalation SL Adult THQ=1 (mg/kg)	Noncarcinogenic SL Adult THI=1 (mg/kg)	Screening Level (mg/kg)
9.46E-06	2.41E-03	5.66E+09	2.79E+03	3.31E+02	-	3.01E+01	2.76E+01	4.69E+02	-	1.16E+02	9.33E+01	5.01E+03	-	1.16E+02	1.14E+02	2.76E+01 ca**

Output generated 25JUL2018:16:54:23

Table G.1-4  
RSL Calculator - Resident Adult - Tap Water (SSLs Based on Risk of 10-6 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific  
Resident Regional Screening Levels (RSL) for Tap Water**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	Ingestion SF (mg/kg-day) <sup>-1</sup>	SFO Ref	Inhalation Unit Risk (µg/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	K <sub>p</sub> (cm/hr)	MW	B (unitless)	t' (hr)	T <sub>event</sub> (hr/event)	FA (unitless)	In EPD?	DA <sub>event</sub> (ca)	DA <sub>event</sub> (nc child)	DA <sub>event</sub> (nc adult)	MCL (ug/L)	Ingestion SL TR=1E-06 (ug/L)	Dermal SL TR=1E-06 (ug/L)	Inhalation SL TR=1E-06 (ug/L)	Carcinogenic SL TR=1E-06 (ug/L)
Dichloroethylene, 1,2-cis-	156-59-2	No	Yes	-		-		2.00E-03	U	-		1.00E+00	1.10E-02	9.69E+01	4.17E-02	8.81E-01	3.67E-01	1.00E+00	Yes	-	4.92E-03	8.49E-03	7.00E+01	-	-	-	-
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	U	2.60E-07	U	6.00E-03	U	4.00E-02	U	1.00E+00	3.34E-02	1.66E+02	1.65E-01	2.14E+00	8.92E-01	1.00E+00	Yes	4.66E-03	1.47E-02	2.55E-02	5.00E+00	3.71E+01	6.53E+01	2.16E+01	1.13E+01
Trichloroethylene	79-01-6	Yes	Yes	4.60E-02	U	4.10E-06	U	5.00E-04	U	2.00E-03	U	1.00E+00	1.16E-02	1.31E+02	5.11E-02	1.37E+00	5.72E-01	1.00E+00	Yes	1.48E-04	1.23E-03	2.12E-03	5.00E+00	1.18E+00	7.45E+00	9.57E-01	4.94E-01
Vinyl Chloride	75-01-4	Yes	Yes	7.20E-01	U	4.40E-06	U	3.00E-03	U	1.00E-01	U	1.00E+00	8.38E-03	6.25E+01	2.55E-02	5.65E-01	2.35E-01	1.00E+00	Yes	2.64E-06	7.37E-03	1.27E-02	2.00E+00	2.14E-02	2.77E-01	3.35E-01	1.88E-02

Output generated 25JUL2018:16:50:04

Table G.1-4  
RSL Calculator - Resident Adult - Tap Water (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

### Site-specific Resident Regional Screening Levels (RSL) for Tap Water

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #29); H = HEAST; F = See FAQ; E = see user guide Section 2.3.5; W = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice); c = cancer; n = noncancer; \* = where: n SL < 100X c SL; \*\* = where n SL < 10X c SL; SSL values are based on DAF=1; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); U = User-provided

Ingestion SL Child THQ=1 (ug/L)	Dermal SL Child THQ=1 (ug/L)	Inhalation SL Child THQ=1 (ug/L)	Noncarcinogenic SL Child THI=1 (ug/L)	Ingestion SL Adult THQ=1 (ug/L)	Dermal SL Adult THQ=1 (ug/L)	Inhalation SL Adult THQ=1 (ug/L)	Noncarcinogenic SL Adult THI=1 (ug/L)	Screening Level (ug/L)
4.01E+01	3.63E+02	-	3.61E+01	6.67E+01	5.47E+02	-	5.95E+01	3.61E+01 nc
1.20E+02	2.30E+02	8.34E+01	4.06E+01	2.00E+02	3.47E+02	8.34E+01	5.03E+01	1.13E+01 ca**
1.00E+01	6.89E+01	4.17E+00	2.83E+00	1.67E+01	1.04E+02	4.17E+00	3.23E+00	4.94E-01 ca**
6.02E+01	8.93E+02	2.09E+02	4.44E+01	1.00E+02	1.29E+03	2.09E+02	6.43E+01	1.88E-02 ca

Output generated 25JUL2018:16:50:04

**Table G.1-5a**  
**Dermal Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>(1)</sup> (unitless)	Permeability Constant <sup>(2)</sup> (cm/hr)	Lag Time per Event <sup>(3)</sup> (hr/event)	Time to reach steady state <sup>(3)</sup> (hr)	Event Duration <sup>(4)</sup> (hr/event)	Molecular Weight <sup>(2)</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>(5)</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	4.0	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	4.0	131.39	0.051

**Notes:**

<sup>(1)</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>(2)</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>(3)</sup> Previously calculated on Table G.1-12.

<sup>(4)</sup> Value obtained from Table 14.

<sup>(5)</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.1-5b**  
**Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10-6 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

<b>COPC</b>	<b>SFo (mg/kg-day)<sup>-1</sup></b>	<b>IUR (ug/m<sup>3</sup>)<sup>-1</sup></b>	<b>RfDo (SubCh) mg/kg-day</b>	<b>RfCi (SubCh) mg/m<sup>3</sup></b>	<b>GIABS</b>	<b>TR</b>	<b>HQ</b>	<b>EV (Events/day)</b>	<b>CF (ug/mg)</b>	<b>CF (cm3/L)</b>	<b>IR-W (L/day)</b>	<b>SA (cm2)</b>	<b>EF (days/yr)</b>	<b>ED (yrs)</b>	<b>BW (kg)</b>	<b>AT-C (days)</b>	<b>AT-N (days)</b>
Tetrachloroethene	2.10E-03	2.60E-07	1.00E-01	4.00E-02	1	1.00E-06	1	1	1000	1000	0.02	3527	250	1	80	25,550	365
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-06	1	1	1000	1000	0.02	3527	250	1	80	25,550	365

**Notes:**  
 ND = No data available

**Table G.1--5c**  
**Calculation of Groundwater SSSLs — Construction Worker (SSSLs Based on Risk of 10-6 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**POTENTIAL GROUNDWATER SSSLs - CANCER**

**POTENTIAL GROUNDWATER SSSLs - NONCANCER**

COPC	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)
	Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL			Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL		
Tetrachloroethene	1.95E+05	1.10E+00	Eq 2		5.97E+03	5.97E+03	3.65E+02	3.43E+02	5.84E+05	3.31E+00	Eq 2		1.79E+04	1.79E+04	5.42E+01	5.40E+01
Trichloroethene	8.89E+03	5.04E-02	Eq 2		8.64E+02	8.64E+02	2.06E+01	2.01E+01	2.92E+03	1.66E-02	Eq 2		2.84E+02	2.84E+02	2.42E+00	2.40E+00

**Notes:**

- <sup>(1)</sup> Calculated using values from Table G.1-5b.
- <sup>(2)</sup> Calculated using values from Table G.1-5a.
- <sup>(3)</sup> Calculated in Table G.1-7b.
- <sup>(4)</sup> Calculated based on ingestion, dermal, and inhalation SSSLs.

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NC = Not calculated -- no toxicity values available

**Table G.1-6  
 Calculation of Acceptable Concentrations in Trench Air — Construction Worker (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)  
 Alabama Army National Guard OMS #28  
 Mobile, Alabama**

COPC	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfC <sub>i</sub> (SubCh) mg/m <sup>3</sup>	TR	HQ	ET (hrs/day)	EF (days/yr)	ED (yrs)	CF (ug/mg)	AT-C (hrs)	AT-N (hrs)	Acceptable Concentration in Trench Air	
											Cancer Inhalation (ug/m <sup>3</sup> )	Noncancer Inhalation (ug/m <sup>3</sup> )
Tetrachloroethene	2.60E-07	4.00E-02	1.00E-06	1	4	250	1	1000	613,200	8760	2.36E+03	3.50E+02
Trichloroethene	4.10E-06	2.00E-03	1.00E-06	1	4	250	1	1000	613,200	8760	1.50E+02	1.75E+01

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater vapors in a trench for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC = Not calculated -- no inhalation toxicity values available

**Table G.1-7a**  
**Input Values for Trench Model (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

For Mass-Transfer Coefficients			For Emission Flux and Concentration in Trench			Trench Dimensions		
Kg,H2O	0.833	cm/s	CF1	1.00E-03	L/cm3	Length	<b>8</b>	ft
MWH2O	18		CF2	1.00E+04	cm2/m2		2.44	m
Kl,O2	0.002	cm/s	CF3	3600	s/hr	Width	<b>3</b>	ft
MWO2	32		F	<b>1</b>			0.91	m
T	<b>77</b>	F	ACH	2	hr-1	Depth	<b>8</b>	ft
T	298	K					2.44	m
R	8.20E-05	atm-m <sup>3</sup> /mol-K				Ratio: width/depth	0.38	

**Notes:**

The equations in which these values are used are from the following source:

Virginia Department of Environmental Quality (VDEQ), 2015, Voluntary Remediation Program – Risk Assessment Guidance.  
[http://www.deq.virginia.gov/Programs/Land ProtectionRevitalization/ RemediationProgram/VoluntaryRemediationProgram/ RPRiskAssessmentGuidance/Guidance.aspxTables](http://www.deq.virginia.gov/Programs/Land%20ProtectionRevitalization/RemediationProgram/VoluntaryRemediationProgram/RPRiskAssessmentGuidance/Guidance.aspxTables)



**Table G.1-7b**  
**Calculation of Groundwater SSSLs for Vapors in a Trench -- Construction Worker (SSSLs Based on Risk of 10-6 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Cancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	2.36E+03	3.65E+02
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.50E+02	2.06E+01

**Noncancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	3.50E+02	5.42E+01
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.75E+01	2.42E+00

**Notes:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>2</sup> Values calculated using inputs from Table G.1-7a and equations contained within the Trench Model (VDEQ, 2015).

<sup>3</sup> Values calculated in Table G.1-6.

<sup>4</sup> Groundwater SSSL for trench vapor pathway = acceptable concentration in trench air / volatilization factor

NC = Not calculated -- no inhalation toxicity values available

**Table G.1-8a**  
**Dermal Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.71	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.71	131.39	0.051

**Notes:**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.1-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.1-8b**  
**Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

<b>COPC</b>	<b>SFo (mg/kg-day)<sup>-1</sup></b>	<b>IUR (ug/m<sup>3</sup>)<sup>-1</sup></b>	<b>RfDo (Chronic) mg/kg-day</b>	<b>RfCi (Chronic) mg/m<sup>3</sup></b>	<b>GIABS</b>	<b>TR</b>	<b>HQ</b>	<b>EV (Events/day)</b>	<b>CF (ug/mg)</b>	<b>CF (cm3/L)</b>	<b>IR-W (L/day)</b>	<b>SA (cm2)</b>	<b>EF (days/yr)</b>	<b>ED (yrs)</b>	<b>BW (kg)</b>	<b>AT-C (days)</b>	<b>AT-N (days)</b>
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1	1.00E-06	1	1	1000	1000	1	950	250	25	80	25550	9125
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-06	1	1	1000	1000	1	950	250	25	80	25550	9125

**Notes:**

ND = No data available

**Table G.1-8c**  
**Calculation of Groundwater SSSLs — Industrial Worker (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

GROUNDWATER - CANCER							GROUNDWATER - NONCANCER								
COPC	Cancer Oral (ug/L)	Cancer Dermal (ug/L)					Ing + Dermal (ug/L)		Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)					Ing + Dermal (ug/L)
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total			Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total	
Tetrachloroethene	1.56E+02	1.64E-01	Eq 1	2.21E+03		2.21E+03	1.45E+02	7.01E+02	7.38E-01	Eq 1	9.96E+03		9.96E+03	6.55E+02	
Trichloroethene	7.11E+00	7.48E-03	Eq 1	3.63E+02		3.63E+02	6.97E+00	5.84E+01	6.15E-02	Eq 1	2.99E+03		2.99E+03	5.73E+01	

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the industrial worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC - Not Calculated (No Toxicity Values are available)

**Table G.1-9**  
**Calculation of Soil SSSLs — Child (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo mg/kg-day	RfCi mg/m <sup>3</sup>	GIABS	TR	HQ	CF-Air (ug/mg)	CF-Soil (kg/mg)	IR-S (mg/day)	FI	EF (days/yr)	ED (yrs)	BW (kg)	VF (m <sup>3</sup> /kg)	ET (hrs/day)	AT-C (Hrs)	AT-N (Hrs)	AT-C (days)	AT-N (days)
Tetrachloroethene	NA	NA	6.00E-03	4.00E-02	1	NA	1	1000	1.00E-06	200	1	350	6	15	2790	24	NA	52560	NA	2190

COPC	SOIL - CANCER				SOIL - NONCANCER			
	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING + DER + Inh (mg/kg)	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING+DER +Inh (mg/kg)
Tetrachloroethene	NA	NA	NA	NA	4.6929E+02	-	116	93

**Note:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to soil for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NA - Not Applicable

**Table G.1-10a**  
**Dermal Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	t*	t <sub>event</sub>	MW	B
cis-1,2-Dichloroethene	1.0	0.011	0.37	0.89	0.54	96.944	0.042
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.54	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.54	131.39	0.051

**Notes**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.1-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.1-10b**  
**Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo (Chronic) mg/kg-day	RfCi (Chronic) mg/m <sup>3</sup>	GIABS	TR	HQ	EV (Events/day)	CF (ug/mg)	CF (cm <sup>3</sup> /L)	IR-W (L/day)	SA (cm <sup>2</sup> )	EF (days/yr)	ED (yrs)	BW (kg)	AT-N (days)
cis-1,2-Dichloroethene	ND	ND	2.00E-03	ND	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03

**Notes:**

NA - Not Applicable

ND = No data available

**Table G.1-10c**  
**Calculation of Groundwater SSSLs — Resident Child (SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**NONCANCER - GROUNDWATER**

COPC	Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)				SSSL: Ing + Dermal (ug/L)	
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2		Dermal Total
cis-1,2-Dichloroethene	4.01E+01	4.91E-03	Eq 1	3.60E+02		3.60E+02	3.61E+01
Tetrachloroethene	1.20E+02	1.47E-02	Eq 1	2.28E+02		2.28E+02	7.87E+01
Trichloroethene	1.00E+01	1.23E-03	Eq 1	6.83E+01		6.83E+01	8.74E+00

**Notes**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.



**Table G.1-11**  
**Estimation of  $DA_{event}$  - Lag Time per Event ( $t_{event}$ ) for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10-6 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

$$\tau_{event} = \frac{l_{sc}^2}{6 * D_{sc}} = 0.105 * 10^{(0.0056 * MW)}$$

Used in calculation for $\tau_{event}$ (Equation A.4 in USEPA 2004)	Molecular Weight <sup>1</sup> (g/mole)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	Apparent thickness of stratum corneum (cm)	Effective Diffusion Coefficient through Stratum Corneum (cm <sup>2</sup> /hr)	Lag Time per Event (hr/event)
Chemical	MW	Log $D_{sc}/l_{sc}$	$D_{sc} / l_{sc}$	$l_{sc}$	$D_{sc}$	$\tau_{event}$
cis-1,2-Dichloroethene	96.944	-3.349093339	0.000447617	0.001	4.48E-07	0.37
Tetrachloroethene	165.83	-3.735667794	0.000183794	0.001	1.84E-07	0.91
Trichloroethene	131.39	-3.542397402	0.000286815	0.001	2.87E-07	0.58

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**Table G.1-12**  
**Estimation of DA<sub>event</sub> - Time to Reach Steady State for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10<sup>-6</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

If  $B \leq 0.6$ , then  $t^* = 2.4 * \tau_{event}$

If  $B > 0.6$ , then  $t^* = 6 * \tau_{event} (b - \sqrt{b^2 - c^2})$

$b = \frac{2 * (1 + B)^2}{\pi} - c$        $c = \frac{1 + 3B + 3B^2}{3 * (1 + B)}$

	Permeability Constant <sup>1</sup> (cm/hr)	Molecular Weight <sup>1</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis (unitless)	Lag Time per Event (hr/event)	Formula Used	Time to reach steady state (hr)	Correlation Coefficients (unitless)	Correlation Coefficients (unitless)
Used in calculation for t* (Equation A.5 or A.6 in USEPA 2004). Also uses Equations A.7 and A.8 for b and c in USEPA 2004.								
<b>Chemical</b>	Kp	MW	B	$\tau_{event}$	Formula	t*	b	c
cis-1,2-Dichloroethene	0.011	96.944	0.042	0.37	Eq. A.5	0.89	0.33	0.36
Tetrachloroethene	0.0334	165.83	0.165	0.91	Eq. A.5	2.18	0.41	0.45
Trichloroethene	0.0116	131.39	0.051	0.58	Eq. A.5	1.39	0.34	0.37

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**APPENDIX G.2**  
**DEVELOPMENT OF SITE-SPECIFIC SCREENING**  
**LEVELS BASED ON RISK OF  $10^{-5}$  AND HQ OF 1**

**Table G.2-1**  
**RSL Calculator - Construction Worker - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Site-specific**  
**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**  
 Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
 R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H <sup>*</sup> and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>1a</sub> (cm <sup>2</sup> /s)	D <sub>1w</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	1.00E-01	H /Subchronic	4.00E-02	I/Chronic	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06

Output generated 18DEC2018:16:07:59

Table G.2-1  
RSL Calculator - Construction Worker - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=1E-05 (mg/kg)	Dermal SL TR=1E-05 (mg/kg)	Inhalation SL TR=1E-05 (mg/kg)	Carcinogenic SL TR=1E-05 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Dermal SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)	
2.41E-03	1.36E+09	5.09E+02	1.18E+05	-	6.01E+03	5.72E+03	3.39E+04	-	8.56E+01	8.54E+01	8.54E+01	nc

Table G.2-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Indoor Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>ia</sub> (cm <sup>2</sup> /s)	D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06	2.41E-03

Output generated 18DEC2018:16:25:32

Table G.2-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Indoor Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=1E-05 (mg/kg)	Inhalation SL TR=1E-05 (mg/kg)	Carcinogenic SL TR=1E-05 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)
5.66E+09	2.79E+03	3.11E+04	1.32E+03	1.26E+03	1.40E+04	4.89E+02	4.73E+02	4.73E+02 sat

**Table G.2-3**  
**RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Site-specific**

**Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H' and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>ia</sub> (cm <sup>2</sup> /s)	D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06	2.41E-03	5.66E+09	2.79E+03

Output generated 18DEC2018:16:35:31



Table G.2-3  
RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10-5 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Ingestion SL TR=1E-05 (mg/kg)	Dermal SL TR=1E-05 (mg/kg)	Inhalation SL TR=1E-05 (mg/kg)	Carcinogenic SL TR=1E-05 (mg/kg)	Ingestion SL Child THQ=1 (mg/kg)	Dermal SL Child THQ=1 (mg/kg)	Inhalation SL Child THQ=1 (mg/kg)	Noncarcinogenic SL Child THI=1 (mg/kg)	Ingestion SL Adult THQ=1 (mg/kg)	Dermal SL Adult THQ=1 (mg/kg)	Inhalation SL Adult THQ=1 (mg/kg)	Noncarcinogenic SL Adult THI=1 (mg/kg)	Screening Level (mg/kg)
3.31E+03	-	3.01E+02	2.76E+02	4.69E+02	-	1.16E+02	9.33E+01	5.01E+03	-	1.16E+02	1.14E+02	9.33E+01 nc

**Table G.2-4**  
**RSL Calculator - Resident Adult - Tap Water (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Default**

**Resident Risk-Based Regional Screening Levels (RSL) for Tap Water**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	K <sub>p</sub> (cm/hr)	MW	B (unitless)	t* (hr)	T <sub>event</sub> (hr/event)	FA (unitless)	In EPD?	DA <sub>event</sub> (ca)	DA <sub>event</sub> (nc child)	DA <sub>event</sub> (nc adult)	MCL (ug/L)
Dichloroethylene, 1,2-cis-	156-59-2	No	Yes	-		-		2.00E-03	I	-		1.00E+00	1.10E-02	9.69E+01	4.17E-02	8.81E-01	3.67E-01	1.00E+00	Yes	-	4.92E-03	8.49E-03	7.00E+01
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	3.34E-02	1.66E+02	1.65E-01	2.14E+00	8.92E-01	1.00E+00	Yes	4.66E-02	1.47E-02	2.55E-02	5.00E+00
Trichloroethylene	79-01-6	Yes	Yes	4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E-03	I	1.00E+00	1.16E-02	1.31E+02	5.11E-02	1.37E+00	5.72E-01	1.00E+00	Yes	1.48E-03	1.23E-03	2.12E-03	5.00E+00
Vinyl Chloride	75-01-4	Yes	Yes	7.20E-01	I	4.40E-06	I	3.00E-03	I	1.00E-01	I	1.00E+00	8.38E-03	6.25E+01	2.55E-02	5.65E-01	2.35E-01	1.00E+00	Yes	2.64E-05	7.37E-03	1.27E-02	2.00E+00

Output generated 15JAN2019:11:54:54

Table G.2-4  
RSL Calculator - Resident Adult - Tap Water (SSLs Based on Risk of 10-5 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Default**  
**Resident Risk-Based Regional Screening Levels (RSL) for Tap Water**  
Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Ingestion SL TR=1E-05 (ug/L)	Dermal SL TR=1E-05 (ug/L)	Inhalation SL TR=1E-05 (ug/L)	Carcinogenic SL TR=1E-05 (ug/L)	Ingestion SL Child THQ=1 (ug/L)	Dermal SL Child THQ=1 (ug/L)	Inhalation SL Child THQ=1 (ug/L)	Noncarcinogenic SL Child THI=1 (ug/L)	Ingestion SL Adult THQ=1 (ug/L)	Dermal SL Adult THQ=1 (ug/L)	Inhalation SL Adult THQ=1 (ug/L)	Noncarcinogenic SL Adult THI=1 (ug/L)	Screening Level (ug/L)
-	-	-	-	4.01E+01	3.63E+02	-	3.61E+01	6.67E+01	5.47E+02	-	5.95E+01	3.61E+01 nc
3.71E+02	6.53E+02	2.16E+02	1.13E+02	1.20E+02	2.30E+02	8.34E+01	4.06E+01	2.00E+02	3.47E+02	8.34E+01	5.03E+01	4.06E+01 nc
1.18E+01	7.45E+01	9.57E+00	4.94E+00	1.00E+01	6.89E+01	4.17E+00	2.83E+00	1.67E+01	1.04E+02	4.17E+00	3.23E+00	2.83E+00 nc
2.14E-01	2.77E+00	3.35E+00	1.88E-01	6.02E+01	8.93E+02	2.09E+02	4.44E+01	1.00E+02	1.29E+03	2.09E+02	6.43E+01	1.88E-01 ca

**Table G.2-5a**  
**Dermal Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>(1)</sup> (unitless)	Permeability Constant <sup>(2)</sup> (cm/hr)	Lag Time per Event <sup>(3)</sup> (hr/event)	Time to reach steady state <sup>(3)</sup> (hr)	Event Duration <sup>(4)</sup> (hr/event)	Molecular Weight <sup>(2)</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>(5)</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	4.0	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	4.0	131.39	0.051

**Notes:**

<sup>(1)</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>(2)</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>(3)</sup> Previously calculated on Table G.2-12.

<sup>(4)</sup> Value obtained from Table 14.

<sup>(5)</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.2-5b**  
**Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

<b>COPC</b>	<b>SFo (mg/kg-day)<sup>-1</sup></b>	<b>IUR (ug/m<sup>3</sup>)<sup>-1</sup></b>	<b>RfDo (SubCh) mg/kg-day</b>	<b>RfCi (SubCh) mg/m<sup>3</sup></b>	<b>GIABS</b>	<b>TR</b>	<b>HQ</b>	<b>EV (Events/day)</b>	<b>CF (ug/mg)</b>	<b>CF (cm3/L)</b>	<b>IR-W (L/day)</b>	<b>SA (cm2)</b>	<b>EF (days/yr)</b>	<b>ED (yrs)</b>	<b>BW (kg)</b>	<b>AT-C (days)</b>	<b>AT-N (days)</b>
Tetrachloroethene	2.10E-03	2.60E-07	1.00E-01	4.00E-02	1	1.00E-05	1	1	1000	1000	0.02	3527	250	1	80	25,550	365
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-05	1	1	1000	1000	0.02	3527	250	1	80	25,550	365

**Notes:**  
 ND = No data available

**Table G.2--5c**  
**Calculation of Groundwater SSSLs — Construction Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**POTENTIAL GROUNDWATER SSSLs - CANCER**

**POTENTIAL GROUNDWATER SSSLs - NONCANCER**

COPC	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)
	Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL			Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL		
Tetrachloroethene	1.95E+06	1.10E+01	Eq 2		5.97E+04	5.97E+04	3.65E+03	3.43E+03	5.84E+05	3.31E+00	Eq 2		1.79E+04	1.79E+04	5.42E+01	5.40E+01
Trichloroethene	8.887E+04	5.04E-01	Eq 2		8.64E+03	8.64E+03	2.06E+02	2.01E+02	2.92E+03	1.66E-02	Eq 2		2.84E+02	2.84E+02	2.42E+00	2.40E+00

**Notes:**

- <sup>(1)</sup> Calculated using values from Table G.2-5b.
- <sup>(2)</sup> Calculated using values from Table G.2-5a.
- <sup>(3)</sup> Calculated in Table G.2-7b.
- <sup>(4)</sup> Calculated based on ingestion, dermal, and inhalation SSSLs.

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NC = Not calculated -- no toxicity values available

**Table G.2-6**  
**Calculation of Acceptable Concentrations in Trench Air — Construction Worker (SSSLs Based on Risk of 10<sup>-5</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfC <sub>i</sub> (SubCh) mg/m <sup>3</sup>	TR	HQ	ET (hrs/day)	EF (days/yr)	ED (yrs)	CF (ug/mg)	AT-C (hrs)	AT-N (hrs)	Acceptable Concentration in Trench Air	
											Cancer Inhalation (ug/m <sup>3</sup> )	Noncancer Inhalation (ug/m <sup>3</sup> )
Tetrachloroethene	2.60E-07	4.00E-02	1.00E-05	1	4	250	1	1000	613,200	8760	2.36E+04	3.50E+02
Trichloroethene	4.10E-06	2.00E-03	1.00E-05	1	4	250	1	1000	613,200	8760	1.50E+03	1.75E+01

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater vapors in a trench for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC = Not calculated -- no inhalation toxicity values available

**Table G.2-7a**  
**Input Values for Trench Model (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

For Mass-Transfer Coefficients			For Emission Flux and Concentration in Trench			Trench Dimensions		
Kg,H2O	0.833	cm/s	CF1	1.00E-03	L/cm3	Length	<b>8</b>	ft
MWH2O	18		CF2	1.00E+04	cm2/m2		2.44	m
Kl,O2	0.002	cm/s	CF3	3600	s/hr	Width	<b>3</b>	ft
MWO2	32		F	<b>1</b>			0.91	m
T	<b>77</b>	F	ACH	2	hr-1	Depth	<b>8</b>	ft
T	298	K					2.44	m
R	8.20E-05	atm-m <sup>3</sup> /mol-K				Ratio: width/depth	0.38	

**Notes:**

The equations in which these values are used are from the following source:

Virginia Department of Environmental Quality (VDEQ), 2015, Voluntary Remediation Program – Risk Assessment Guidance.  
[http://www.deq.virginia.gov/Programs/Land ProtectionRevitalization/ RemediationProgram/VoluntaryRemediationProgram/ RPRiskAssessmentGuidance/Guidance.aspxTables](http://www.deq.virginia.gov/Programs/Land%20ProtectionRevitalization/RemediationProgram/VoluntaryRemediationProgram/RPRiskAssessmentGuidance/Guidance.aspxTables)



**Table G.2-7b**  
**Calculation of Groundwater SSSLs for Vapors in a Trench -- Construction Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Cancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	2.36E+04	3.65E+03
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.50E+03	2.06E+02

**Noncancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	3.50E+02	5.42E+01
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.75E+01	2.42E+00

**Notes:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>2</sup> Values calculated using inputs from Table G.2-7a and equations contained within the Trench Model (VDEQ, 2015).

<sup>3</sup> Values calculated in Table G.2-6.

<sup>4</sup> Groundwater SSSL for trench vapor pathway = acceptable concentration in trench air / volatilization factor

NC = Not calculated -- no inhalation toxicity values available

**Table G.2-8a**  
**Dermal Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.71	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.71	131.39	0.051

**Notes:**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.2-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.2-8b**  
**Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo (Chronic) mg/kg-day	RfCi (Chronic) mg/m <sup>3</sup>	GIABS	TR	HQ	EV (Events/day)	CF (ug/mg)	CF (cm <sup>3</sup> /L)	IR-W (L/day)	SA (cm <sup>2</sup> )	EF (days/yr)	ED (yrs)	BW (kg)	AT-C (days)	AT-N (days)
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1	1.00E-05	1	1	1000	1000	1	950	250	25	80	25550	9125
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-05	1	1	1000	1000	1	950	250	25	80	25550	9125

**Notes:**

ND = No data available

**Table G.2-8c**  
**Calculation of Groundwater SSSLs — Industrial Worker (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	GROUNDWATER - CANCER							GROUNDWATER - NONCANCER						
	Cancer Oral (ug/L)	Cancer Dermal (ug/L)					Ing + Dermal (ug/L)	Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)					Ing + Dermal (ug/L)
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total		Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total	
Tetrachloroethene	1.56E+03	1.64E+00	Eq 1	2.21E+04		2.21E+04	1.45E+03	7.01E+02	7.38E-01	Eq 1	9.96E+03		9.96E+03	6.55E+02
Trichloroethene	7.11E+01	7.48E-02	Eq 1	3.63E+03		3.63E+03	6.97E+01	5.84E+01	6.15E-02	Eq 1	2.99E+03		2.99E+03	5.73E+01

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the industrial worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC - Not Calculated (No Toxicity Values are available)

**Table G.2-9**  
**Calculation of Soil SSSLs — Child (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo mg/kg-day	RfCi mg/m <sup>3</sup>	GIABS	TR	HQ	CF-Air (ug/mg)	CF-Soil (kg/mg)	IR-S (mg/day)	FI	EF (days/yr)	ED (yrs)	BW (kg)	VF (m <sup>3</sup> /kg)	ET (hrs/day)	AT-C (Hrs)	AT-N (Hrs)	AT-C (days)	AT-N (days)
Tetrachloroethene	NA	NA	6.00E-03	4.00E-02	1	NA	1	1000	1.00E-06	200	1	350	6	15	2790	24	NA	52560	NA	2190

COPC	SOIL - CANCER				SOIL - NONCANCER			
	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING + DER + Inh (mg/kg)	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING+DER +Inh (mg/kg)
Tetrachloroethene	NA	NA	NA	NA	4.6929E+02	-	116	93

**Note:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to soil for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NA - Not Applicable

**Table G.2-10a**  
**Dermal Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	t*	t <sub>event</sub>	MW	B
cis-1,2-Dichloroethene	1.0	0.011	0.37	0.89	0.54	96.944	0.042
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.54	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.54	131.39	0.051

**Notes**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.1-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.2-10b**  
**Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo (Chronic) mg/kg-day	RfCi (Chronic) mg/m <sup>3</sup>	GIABS	TR	HQ	EV (Events/day)	CF (ug/mg)	CF (cm <sup>3</sup> /L)	IR-W (L/day)	SA (cm <sup>2</sup> )	EF (days/yr)	ED (yrs)	BW (kg)	AT-N (days)
cis-1,2-Dichloroethene	ND	ND	2.00E-03	ND	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03

**Notes:**

NA - Not Applicable

ND = No data available

**Table G.2-10c**  
**Calculation of Groundwater SSSLs — Resident Child (SSSLs Based on Risk of 10<sup>-5</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**NONCANCER - GROUNDWATER**

COPC	Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)				SSSL: Ing + Dermal (ug/L)	
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2		Dermal Total
cis-1,2-Dichloroethene	4.01E+01	4.91E-03	Eq 1	3.60E+02		3.60E+02	3.61E+01
Tetrachloroethene	1.20E+02	1.47E-02	Eq 1	2.28E+02		2.28E+02	7.87E+01
Trichloroethene	1.00E+01	1.23E-03	Eq 1	6.83E+01		6.83E+01	8.74E+00

**Notes**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.



**Table G.2-11**  
**Estimation of  $DA_{event}$  - Lag Time per Event ( $t_{event}$ ) for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

$$\tau_{event} = \frac{l_{sc}^2}{6 * D_{sc}} = 0.105 * 10^{(0.0056 * MW)}$$

Used in calculation for $\tau_{event}$ (Equation A.4 in USEPA 2004)	Molecular Weight <sup>1</sup> (g/mole)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	Apparent thickness of stratum corneum (cm)	Effective Diffusion Coefficient through Stratum Corneum (cm <sup>2</sup> /hr)	Lag Time per Event (hr/event)
Chemical	MW	Log $D_{sc}/l_{sc}$	$D_{sc} / l_{sc}$	$l_{sc}$	$D_{sc}$	$\tau_{event}$
cis-1,2-Dichloroethene	96.944	-3.349093339	0.000447617	0.001	4.48E-07	0.37
Tetrachloroethene	165.83	-3.735667794	0.000183794	0.001	1.84E-07	0.91
Trichloroethene	131.39	-3.542397402	0.000286815	0.001	2.87E-07	0.58

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**Table G.2-12**  
**Estimation of DA<sub>event</sub> - Time to Reach Steady State for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10-5 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

If  $B \leq 0.6$ , then  $t^* = 2.4 * \tau_{event}$

If  $B > 0.6$ , then  $t^* = 6 * \tau_{event} (b - \sqrt{b^2 - c^2})$

$b = \frac{2 * (1 + B)^2}{\pi} - c$        $c = \frac{1 + 3B + 3B^2}{3 * (1 + B)}$

	Permeability Constant <sup>1</sup> (cm/hr)	Molecular Weight <sup>1</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis (unitless)	Lag Time per Event (hr/event)	Formula Used	Time to reach steady state (hr)	Correlation Coefficients (unitless)	Correlation Coefficients (unitless)
Used in calculation for t* (Equation A.5 or A.6 in USEPA 2004). Also uses Equations A.7 and A.8 for b and c in USEPA 2004.								
<b>Chemical</b>	Kp	MW	B	$\tau_{event}$	Formula	t*	b	c
cis-1,2-Dichloroethene	0.011	96.944	0.042	0.37	Eq. A.5	0.89	0.33	0.36
Tetrachloroethene	0.0334	165.83	0.165	0.91	Eq. A.5	2.18	0.41	0.45
Trichloroethene	0.0116	131.39	0.051	0.58	Eq. A.5	1.39	0.34	0.37

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**APPENDIX G.3  
DEVELOPMENT OF SITE-SPECIFIC  
SCREENING LEVELS BASED ON RISK OF  $10^{-4}$   
AND HQ OF 1**

**Table G.3-1**  
**RSL Calculator - Construction Worker - Soil (SSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Site-specific**

**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>ia</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	1.00E-01	H /Subchronic	4.00E-02	I /Chronic	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02

Output generated 18DEC2018:16:10:01

Table G.3-1  
RSL Calculator - Construction Worker - Soil (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Construction Worker Regional Screening Levels (RSL) for Soil - Other Construction Activities**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice); ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

D <sub>lw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=0.0001 (mg/kg)	Dermal SL TR=0.0001 (mg/kg)	Inhalation SL TR=0.0001 (mg/kg)	Carcinogenic SL TR=0.0001 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Dermal SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)	
9.46E-06	2.41E-03	1.36E+09	5.09E+02	1.18E+06	-	6.01E+04	5.72E+04	3.39E+04	-	8.56E+01	8.54E+01	8.54E+01	nc

Table G.3-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-4 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Indoor Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H <sup>+</sup> and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>ia</sub> (cm <sup>2</sup> /s)	D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06	2.41E-03

Output generated 18DEC2018:16:28:14

Table G.3-2  
RSL Calculator - Industrial Worker - Soil (SSSLs Based on Risk of 10-4 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Indoor Worker Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)	Ingestion SL TR=0.0001 (mg/kg)	Inhalation SL TR=0.0001 (mg/kg)	Carcinogenic SL TR=0.0001 (mg/kg)	Ingestion SL THQ=1 (mg/kg)	Inhalation SL THQ=1 (mg/kg)	Noncarcinogenic SL THI=1 (mg/kg)	Screening Level (mg/kg)
5.66E+09	2.79E+03	3.11E+05	1.32E+04	1.26E+04	1.40E+04	4.89E+02	4.73E+02	4.73E+02 sat

**Table G.3-3**  
**RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10-4 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Site-specific**

**Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	ABS	RBA	Soil Saturation Concentration (mg/kg)	S (mg/L)	K <sub>oc</sub> (cm <sup>3</sup> /g)	K <sub>d</sub> (cm <sup>3</sup> /g)	HLC (atm-m <sup>3</sup> /mole)	Henry's Law Constant Used in Calcs (unitless)	H' and HLC Ref	Normal Boiling Point BP (K)	BP Ref	Critical Temperature TC (K)	TC Ref	Chemical Type	D <sub>ia</sub> (cm <sup>2</sup> /s)	D <sub>iw</sub> (cm <sup>2</sup> /s)	D <sub>A</sub> (cm <sup>2</sup> /s)	Particulate Emission Factor (m <sup>3</sup> /kg)	Volatilization Factor (m <sup>3</sup> /kg)
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	-	1.00E+00	1.66E+02	2.06E+02	9.49E+01	5.70E-01	1.77E-02	7.24E-01	PHYSPROP	3.94E+02	PHYSPROP	6.20E+02	YAWS	VOC	5.05E-02	9.46E-06	2.41E-03	5.66E+09	2.79E+03

Output generated 18DEC2018:16:37:23



Table G.3-3  
RSL Calculator - Resident Adult - Soil (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Site-specific**

**Resident Regional Screening Levels (RSL) for Soil**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile; R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Ingestion SL TR=0.0001 (mg/kg)	Dermal SL TR=0.0001 (mg/kg)	Inhalation SL TR=0.0001 (mg/kg)	Carcinogenic SL TR=0.0001 (mg/kg)	Ingestion SL Child THQ=1 (mg/kg)	Dermal SL Child THQ=1 (mg/kg)	Inhalation SL Child THQ=1 (mg/kg)	Noncarcinogenic SL Child THI=1 (mg/kg)	Ingestion SL Adult THQ=1 (mg/kg)	Dermal SL Adult THQ=1 (mg/kg)	Inhalation SL Adult THQ=1 (mg/kg)	Noncarcinogenic SL Adult THI=1 (mg/kg)	Screening Level (mg/kg)
3.31E+04	-	3.01E+03	2.76E+03	4.69E+02	-	1.16E+02	9.33E+01	5.01E+03	-	1.16E+02	1.14E+02	9.33E+01 nc

**Table G.3-4**  
**RSL Calculator - Resident Adult - Tap Water (SSSLs Based on Risk of 10-4 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Default**

**Resident Risk-Based Regional Screening Levels (RSL) for Tap Water**

Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Chemical	CAS Number	Mutagen?	Volatile?	SF <sub>o</sub> (mg/kg-day) <sup>-1</sup>	SF <sub>o</sub> Ref	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m <sup>3</sup> )	RfC Ref	GIABS	K <sub>p</sub> (cm/hr)	MW	B (unitless)	t <sup>*</sup> (hr)	T <sub>event</sub> (hr/event)	FA (unitless)	In EPD?	DA <sub>event</sub> (ca)	DA <sub>event</sub> (nc child)	DA <sub>event</sub> (nc adult)	MCL (ug/L)
Dichloroethylene, 1,2-cis-	156-59-2	No	Yes	-		-		2.00E-03	I	-		1.00E+00	1.10E-02	9.69E+01	4.17E-02	8.81E-01	3.67E-01	1.00E+00	Yes	-	4.92E-03	8.49E-03	7.00E+01
Tetrachloroethylene	127-18-4	No	Yes	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	3.34E-02	1.66E+02	1.65E-01	2.14E+00	8.92E-01	1.00E+00	Yes	4.66E-01	1.47E-02	2.55E-02	5.00E+00
Trichloroethylene	79-01-6	Yes	Yes	4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E-03	I	1.00E+00	1.16E-02	1.31E+02	5.11E-02	1.37E+00	5.72E-01	1.00E+00	Yes	1.48E-02	1.23E-03	2.12E-03	5.00E+00
Vinyl Chloride	75-01-4	Yes	Yes	7.20E-01	I	4.40E-06	I	3.00E-03	I	1.00E-01	I	1.00E+00	8.38E-03	6.25E+01	2.55E-02	5.65E-01	2.35E-01	1.00E+00	Yes	2.64E-04	7.37E-03	1.27E-02	2.00E+00

Output generated 15JAN2019:11:56:00

Table G.3-4  
RSL Calculator - Resident Adult - Tap Water (SSSLs Based on Risk of 10-4 and HQ of 1)  
Alabama Army National Guard OMS #28  
Mobile, Alabama

**Default**  
**Resident Risk-Based Regional Screening Levels (RSL) for Tap Water**  
Key: I = IRIS; P = PPRTV; D = DWSHA; O = OPP; A = ATSDR; C = Cal EPA; X = APPENDIX PPRTV SCREEN (See FAQ #31); H = HEAST; F = See FAQ; W = see user guide Section 2.3.5; E = see user guide Section 2.3.6; L = see user guide on lead; M = mutagen; S = see user guide Section 5; V = volatile;  
R = RBA applied (See User Guide for Arsenic notice) ; ca = cancer; nc = noncancer; \* = where: nc SL < 100X ca SL; \*\* = where nc SL < 10X ca SL; SSL values are based on DAF=1; max = Concentration may exceed ceiling limit (See User Guide); sat = Concentration may exceed Csat (See User Guide); U = User-provided

Ingestion SL TR=0.0001 (ug/L)	Dermal SL TR=0.0001 (ug/L)	Inhalation SL TR=0.0001 (ug/L)	Carcinogenic SL TR=0.0001 (ug/L)	Ingestion SL Child THQ=1 (ug/L)	Dermal SL Child THQ=1 (ug/L)	Inhalation SL Child THQ=1 (ug/L)	Noncarcinogenic SL Child THI=1 (ug/L)	Ingestion SL Adult THQ=1 (ug/L)	Dermal SL Adult THQ=1 (ug/L)	Inhalation SL Adult THQ=1 (ug/L)	Noncarcinogenic SL Adult THI=1 (ug/L)	Screening Level (ug/L)
-	-	-	-	4.01E+01	3.63E+02	-	3.61E+01	6.67E+01	5.47E+02	-	5.95E+01	3.61E+01 nc
3.71E+03	6.53E+03	2.16E+03	1.13E+03	1.20E+02	2.30E+02	8.34E+01	4.06E+01	2.00E+02	3.47E+02	8.34E+01	5.03E+01	4.06E+01 nc
1.18E+02	7.45E+02	9.57E+01	4.94E+01	1.00E+01	6.89E+01	4.17E+00	2.83E+00	1.67E+01	1.04E+02	4.17E+00	3.23E+00	2.83E+00 nc
2.14E+00	2.77E+01	3.35E+01	1.88E+00	6.02E+01	8.93E+02	2.09E+02	4.44E+01	1.00E+02	1.29E+03	2.09E+02	6.43E+01	1.88E+00 ca

**Table G.3-5a**  
**Dermal Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>(1)</sup> (unitless)	Permeability Constant <sup>(2)</sup> (cm/hr)	Lag Time per Event <sup>(3)</sup> (hr/event)	Time to reach steady state <sup>(3)</sup> (hr)	Event Duration <sup>(4)</sup> (hr/event)	Molecular Weight <sup>(2)</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>(5)</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	4.0	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	4.0	131.39	0.051

**Notes:**

- <sup>(1)</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).  
<sup>(2)</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).  
<sup>(3)</sup> Previously calculated on Table G.3-12.  
<sup>(4)</sup> Value obtained from Table 14.  
<sup>(5)</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.3-5b**  
**Exposure Factors for Groundwater — Construction Worker (SSSLs Based on Risk of 10-4 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

<b>COPC</b>	<b>SFo (mg/kg-day)<sup>-1</sup></b>	<b>IUR (ug/m<sup>3</sup>)<sup>-1</sup></b>	<b>RfDo (SubCh) mg/kg-day</b>	<b>RfCi (SubCh) mg/m<sup>3</sup></b>	<b>GIABS</b>	<b>TR</b>	<b>HQ</b>	<b>EV (Events/day)</b>	<b>CF (ug/mg)</b>	<b>CF (cm3/L)</b>	<b>IR-W (L/day)</b>	<b>SA (cm2)</b>	<b>EF (days/yr)</b>	<b>ED (yrs)</b>	<b>BW (kg)</b>	<b>AT-C (days)</b>	<b>AT-N (days)</b>
Tetrachloroethene	2.10E-03	2.60E-07	1.00E-01	4.00E-02	1	1.00E-04	1	1	1000	1000	0.02	3527	250	1	80	25,550	365
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-04	1	1	1000	1000	0.02	3527	250	1	80	25,550	365

**Notes:**

ND = No data available

**Table G.3--5c**  
**Calculation of Groundwater SSSLs — Construction Worker (SSSLs Based on Risk of 10-4 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**POTENTIAL GROUNDWATER SSSLs - CANCER**

**POTENTIAL GROUNDWATER SSSLs - NONCANCER**

COPC	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)	Ingestion <sup>(1)</sup> (ug/L)	Dermal (ug/L)					Inhalation <sup>(3)</sup> (ug/L)	Combined SSSL <sup>(4)</sup> (ug/L)
	Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL			Oral	Daevent <sup>(1)</sup>	t-event vs. t*	If Eq 1	If Eq 2 <sup>(2)</sup>	Dermal SSSL		
Tetrachloroethene	1.95E+07	1.10E+02	Eq 2		5.97E+05	5.97E+05	3.65E+04	3.43E+04	5.84E+05	3.31E+00	Eq 2		1.79E+04	1.79E+04	5.42E+01	5.40E+01
Trichloroethene	8.89E+05	5.04E+00	Eq 2		8.64E+04	8.64E+04	2.06E+03	2.01E+03	2.92E+03	1.66E-02	Eq 2		2.84E+02	2.84E+02	2.42E+00	2.40E+00

**Notes:**

- <sup>(1)</sup> Calculated using values from Table G.3-5b.
- <sup>(2)</sup> Calculated using values from Table G.3-5a.
- <sup>(3)</sup> Calculated in Table G.3-7b.
- <sup>(4)</sup> Calculated based on ingestion, dermal, and inhalation SSSLs.

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NC = Not calculated -- no toxicity values available

**Table G.3-6**  
**Calculation of Acceptable Concentrations in Trench Air — Construction Worker (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfC <sub>i</sub> (SubCh) mg/m <sup>3</sup>	TR	HQ	ET (hrs/day)	EF (days/yr)	ED (yrs)	CF (ug/mg)	AT-C (hrs)	AT-N (hrs)	Acceptable Concentration in Trench Air	
											Cancer Inhalation (ug/m <sup>3</sup> )	Noncancer Inhalation (ug/m <sup>3</sup> )
Tetrachloroethene	2.60E-07	4.00E-02	1.00E-04	1	4	250	1	1000	613,200	8760	2.36E+05	3.50E+02
Trichloroethene	4.10E-06	2.00E-03	1.00E-04	1	4	250	1	1000	613,200	8760	1.50E+04	1.75E+01

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater vapors in a trench for the construction worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC = Not calculated -- no inhalation toxicity values available

**Table G.3-7a**  
**Input Values for Trench Model (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

For Mass-Transfer Coefficients			For Emission Flux and Concentration in Trench			Trench Dimensions		
Kg,H2O	0.833	cm/s	CF1	1.00E-03	L/cm3	Length	<b>8</b>	ft
MWH2O	18		CF2	1.00E+04	cm2/m2		2.44	m
Kl,O2	0.002	cm/s	CF3	3600	s/hr	Width	<b>3</b>	ft
MWO2	32		F	<b>1</b>			0.91	m
T	<b>77</b>	F	ACH	2	hr-1	Depth	<b>8</b>	ft
T	298	K					2.44	m
R	8.20E-05	atm-m <sup>3</sup> /mol-K				Ratio: width/depth	0.38	

**Notes:**

The equations in which these values are used are from the following source:

Virginia Department of Environmental Quality (VDEQ), 2015, Voluntary Remediation Program – Risk Assessment Guidance.  
[http://www.deq.virginia.gov/Programs/Land ProtectionRevitalization/ RemediationProgram/VoluntaryRemediationProgram/ RPRiskAssessmentGuidance/Guidance.aspxTables](http://www.deq.virginia.gov/Programs/Land%20ProtectionRevitalization/RemediationProgram/VoluntaryRemediationProgram/RPRiskAssessmentGuidance/Guidance.aspxTables)



**Table G.3-7b**  
**Calculation of Groundwater SSSLs for Vapors in a Trench -- Construction Worker (SSSLs Based on Risk of 10-4 and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**Cancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	2.36E+05	3.65E+04
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.50E+04	2.06E+03

**Noncancer**

COPC	Molecular Weight <sup>1</sup> MW <sub>i</sub> (g/mol)	Henry's Law Constant <sup>1</sup> H <sub>i</sub> (atm-m <sup>3</sup> /mol)	Gas-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iG</sub> (cm/s)	Liquid-Phase Mass Transfer Coefficient <sup>2</sup> K <sub>iL</sub> (cm/s)	Overall Mass Transfer Coefficient <sup>2</sup> K <sub>i</sub> (cm/s)	Volatilization Factor <sup>2</sup> VF (L/m <sup>3</sup> )	Acceptable Concentration in Trench Air <sup>3</sup> C <sub>trench</sub> (ug/m <sup>3</sup> )	SSSL: Concentration in Groundwater <sup>4</sup> C <sub>gw</sub> (ug/L)
<i>VOCs</i>								
Tetrachloroethene	165.83	1.77E-02	3.96E-01	8.79E-04	8.76E-04	6.47E+00	3.50E+02	5.42E+01
Trichloroethylene	131.39	9.85E-03	4.28E-01	9.87E-04	9.81E-04	7.24E+00	1.75E+01	2.42E+00

**Notes:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>2</sup> Values calculated using inputs from Table G.3-7a and equations contained within the Trench Model (VDEQ, 2015).

<sup>3</sup> Values calculated in Table G.3-6.

<sup>4</sup> Groundwater SSSL for trench vapor pathway = acceptable concentration in trench air / volatilization factor

NC = Not calculated -- no inhalation toxicity values available

**Table G.3-8a**  
**Dermal Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	$t^*$	$t_{\text{event}}$	MW	B
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.71	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.71	131.39	0.051

**Notes:**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.3-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.3-8b**  
**Exposure Factors for Groundwater — Industrial Worker (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

<b>COPC</b>	<b>SFo (mg/kg-day)<sup>-1</sup></b>	<b>IUR (ug/m<sup>3</sup>)<sup>-1</sup></b>	<b>RfDo (Chronic) mg/kg-day</b>	<b>RfCi (Chronic) mg/m<sup>3</sup></b>	<b>GIABS</b>	<b>TR</b>	<b>HQ</b>	<b>EV (Events/day)</b>	<b>CF (ug/mg)</b>	<b>CF (cm<sup>3</sup>/L)</b>	<b>IR-W (L/day)</b>	<b>SA (cm<sup>2</sup>)</b>	<b>EF (days/yr)</b>	<b>ED (yrs)</b>	<b>BW (kg)</b>	<b>AT-C (days)</b>	<b>AT-N (days)</b>
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1	1.00E-04	1	1	1000	1000	1	950	250	25	80	25550	9125
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1	1.00E-04	1	1	1000	1000	1	950	250	25	80	25550	9125

**Notes:**

ND = No data available

**Table G.3-8c**  
**Calculation of Groundwater SSSLs — Industrial Worker (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	GROUNDWATER - CANCER						GROUNDWATER - NONCANCER							
	Cancer Oral (ug/L)	Cancer Dermal (ug/L)				Ing + Dermal (ug/L)	Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)				Ing + Dermal (ug/L)		
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total		Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2	Dermal Total	
Tetrachloroethene	1.56E+04	1.64E+01	Eq 1	2.21E+05		2.21E+05	1.45E+04	7.01E+02	7.38E-01	Eq 1	9.96E+03		9.96E+03	6.55E+02
Trichloroethene	7.11E+02	7.48E-01	Eq 1	3.63E+04		3.63E+04	6.97E+02	5.84E+01	6.15E-02	Eq 1	2.99E+03		2.99E+03	5.73E+01

**Notes:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the industrial worker scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.

NC - Not Calculated (No Toxicity Values are available)

**Table G.3-9**  
**Calculation of Soil SSSLs — Child (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo mg/kg-day	RfCi mg/m <sup>3</sup>	GIABS	TR	HQ	CF-Air (ug/mg)	CF-Soil (kg/mg)	IR-S (mg/day)	FI	EF (days/yr)	ED (yrs)	BW (kg)	VF (m <sup>3</sup> /kg)	ET (hrs/day)	AT-C (Hrs)	AT-N (Hrs)	AT-C (days)	AT-N (days)
Tetrachloroethene	NA	NA	6.00E-03	4.00E-02	1	NA	1	1000	1.00E-06	200	1	350	6	15	2790	24	NA	52560	NA	2190

COPC	SOIL - CANCER				SOIL - NONCANCER			
	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING + DER + Inh (mg/kg)	Ingestion (mg/kg)	Dermal (mg/kg)	Inhalation (mg/kg)	ING+DER +Inh (mg/kg)
Tetrachloroethene	NA	NA	NA	NA	4.6929E+02	-	116	93

**Note:**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to soil for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.  
 NA - Not Applicable

**Table G.3-10a**  
**Dermal Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

Parameter	Fraction absorbed water <sup>1</sup> (unitless)	Permeability Constant <sup>2</sup> (cm/hr)	Lag Time per Event <sup>3</sup> (hr/event)	Time to reach steady state <sup>3</sup> (hr)	Event Duration <sup>4</sup> (hr/event)	Molecular Weight <sup>2</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis <sup>5</sup> (unitless)
Chemical	FA	Kp	$\tau_{\text{event}}$	t*	t <sub>event</sub>	MW	B
cis-1,2-Dichloroethene	1.0	0.011	0.37	0.89	0.54	96.944	0.042
Tetrachloroethene	1.0	0.0334	0.91	2.18	0.54	165.83	0.165
Trichloroethene	1.0	0.0116	0.58	1.39	0.54	131.39	0.051

**Notes**

<sup>1</sup> Value obtained from Appendix B, Exhibit B-3 (USEPA, July 2004).

<sup>2</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

<sup>3</sup> Previously calculated on Table G.3-12.

<sup>4</sup> Value obtained from Table 14.

<sup>5</sup> Value estimated using Equation A-1 (USEPA, July 2004).

**Table G.3-10b**  
**Exposure Factors for Groundwater — Resident Child (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

COPC	SFo (mg/kg-day) <sup>-1</sup>	IUR (ug/m <sup>3</sup> ) <sup>-1</sup>	RfDo (Chronic) mg/kg-day	RfCi (Chronic) mg/m <sup>3</sup>	GIABS	TR	HQ	EV (Events/day)	CF (ug/mg)	CF (cm <sup>3</sup> /L)	IR-W (L/day)	SA (cm <sup>2</sup> )	EF (days/yr)	ED (yrs)	BW (kg)	AT-N (days)
cis-1,2-Dichloroethene	ND	ND	2.00E-03	ND	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Tetrachloroethene	2.10E-03	2.60E-07	6.00E-03	4.00E-02	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03
Trichloroethene	4.60E-02	4.10E-06	5.00E-04	2.00E-03	1.00E+00	NA	1.00E+00	1.00E+00	1.00E+03	1.00E+03	7.80E-01	6.38E+03	3.50E+02	6.00E+00	1.50E+01	2.19E+03

**Notes:**

NA - Not Applicable

ND = No data available

**Table G.3-10c**  
**Calculation of Groundwater SSSLs — Resident Child (SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

**NONCANCER - GROUNDWATER**

COPC	Noncancer Oral (ug/L)	Noncancer Dermal (ug/L)				SSSL: Ing + Dermal (ug/L)	
	Oral	DAevent	t-event vs. t*	If Eq 1	If Eq 2		Dermal Total
cis-1,2-Dichloroethene	4.01E+01	4.91E-03	Eq 1	3.60E+02		3.60E+02	3.61E+01
Tetrachloroethene	1.20E+02	1.47E-02	Eq 1	2.28E+02		2.28E+02	7.87E+01
Trichloroethene	1.00E+01	1.23E-03	Eq 1	6.83E+01		6.83E+01	8.74E+00

**Notes**

USEPA's Regional Screening Level (RSL) Calculator does not calculate an RSL (or Site-Specific Screening Level (SSSL)) for exposure to groundwater for the residential child scenario; therefore, the SSSL was calculated using USEPA's standard risk equations.



**Table G.3-11**  
**Estimation of  $DA_{event}$  - Lag Time per Event ( $t_{event}$ ) for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

$$\tau_{event} = \frac{l_{sc}^2}{6 * D_{sc}} = 0.105 * 10^{(0.0056 * MW)}$$

Used in calculation for $\tau_{event}$ (Equation A.4 in USEPA 2004)	Molecular Weight <sup>1</sup> (g/mole)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	EDC for stratum corneum/ Apparent thickness of stratum corneum (cm/hr)	Apparent thickness of stratum corneum (cm)	Effective Diffusion Coefficient through Stratum Corneum (cm <sup>2</sup> /hr)	Lag Time per Event (hr/event)
Chemical	MW	Log $D_{sc}/l_{sc}$	$D_{sc} / l_{sc}$	$l_{sc}$	$D_{sc}$	$\tau_{event}$
cis-1,2-Dichloroethene	96.944	-3.349093339	0.000447617	0.001	4.48E-07	0.37
Tetrachloroethene	165.83	-3.735667794	0.000183794	0.001	1.84E-07	0.91
Trichloroethene	131.39	-3.542397402	0.000286815	0.001	2.87E-07	0.58

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).

**Table G.3-12**  
**Estimation of DA<sub>event</sub> - Time to Reach Steady State for Dermal Contact with Groundwater**  
**(SSSLs Based on Risk of 10<sup>-4</sup> and HQ of 1)**  
**Alabama Army National Guard OMS #28**  
**Mobile, Alabama**

If  $B \leq 0.6$ , then  $t^* = 2.4 * \tau_{event}$

If  $B > 0.6$ , then  $t^* = 6 * \tau_{event} (b - \sqrt{b^2 - c^2})$

$b = \frac{2 * (1 + B)^2}{\pi} - c$        $c = \frac{1 + 3B + 3B^2}{3 * (1 + B)}$

	Permeability Constant <sup>1</sup> (cm/hr)	Molecular Weight <sup>1</sup> (g/mole)	Kp Stratum Corneum: Kp Viable Epidermis (unitless)	Lag Time per Event (hr/event)	Formula Used	Time to reach steady state (hr)	Correlation Coefficients (unitless)	Correlation Coefficients (unitless)
Used in calculation for t* (Equation A.5 or A.6 in USEPA 2004). Also uses Equations A.7 and A.8 for b and c in USEPA 2004.								
<b>Chemical</b>	Kp	MW	B	$\tau_{event}$	Formula	t*	b	c
cis-1,2-Dichloroethene	0.011	96.944	0.042	0.37	Eq. A.5	0.89	0.33	0.36
Tetrachloroethene	0.0334	165.83	0.165	0.91	Eq. A.5	2.18	0.41	0.45
Trichloroethene	0.0116	131.39	0.051	0.58	Eq. A.5	1.39	0.34	0.37

**Note:**

<sup>1</sup> Value obtained from the RSL Chemical-Specific Parameters Supporting Table (USEPA, November 2018).